

## SR Series regulator



### Symbol



### Product feature

1. Panel support can be chosen for the installation of regulator with independent use in pipeline.
2. The structure is delicate and compact, which is convenient for installation and application.
3. The performance of pressure adjustment is reliable and steady.
4. In addition to standard type, lower pressure type is optional (The highest adjustable pressure is 0.4 MPa).

### Specification

Model	SR200-06	SR200-06L	SR200-08	SR200-08L
Fluid	Air			
Port size [Note 1]	1/8"		1/4"	
Pressure range	Standard type:0.05~0.9MPa(7~130psi) ; Lower pressure type:0.03~0.4MPa(4~57psi)			
Max. pressure	1.0MPa(145psi)			
Proof pressure	1.5MPa(215psi)			
Temperature range	-20~70°C			

[Note 1] PT thread, G thread and NPT thread are available.

### Ordering code


SR 200 08 L □ □ 1 □

① ② ③ ④ ⑤ ⑥ ⑦ ⑧


① Model	② Series code	③ Port size	④ Type code	⑤ Accessories	⑥ Pressure gauge	⑦ Scale	⑧ Thread type
SR: Regulator (Mini type)	200: 200 Series	06: 1/8" 08: 1/4"	Blank: Standard L: Lower pressure	Blank: Bracket J: No bracket	Blank: Pressure gauge N: No pressure gauge	1: MPa 2: psi 3: bar 4: kgf/cm <sup>2</sup> & psi	Blank:PT (Scale:Mpa or kgf/cm <sup>2</sup> & psi) G:G(Scale:bar) T:NPT(Scale:psi)

### Pressure and feature of flow

#### Pressure chart



#### Flow chart

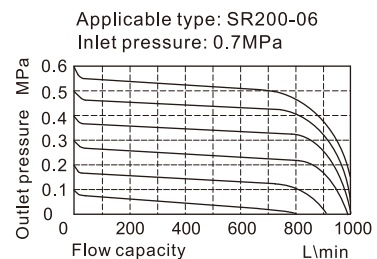

### Dimensions

