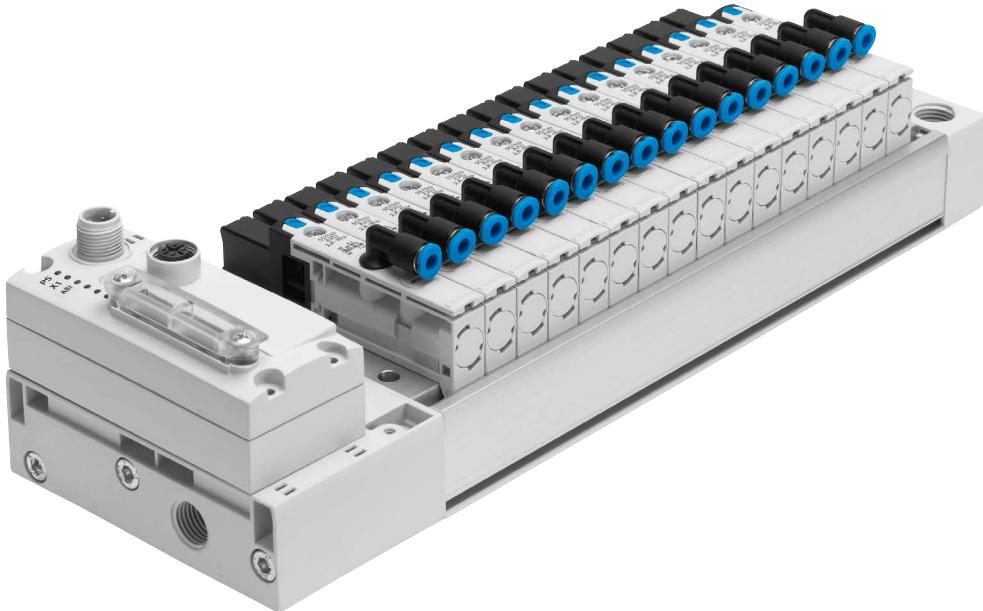


## Fieldbus modules CTEU/Installation system CTEL

**FESTO**



## Key features



### The system

- CTEU fieldbus modules for valve terminals
- Festo-specific interface (I-Port)
- Input modules CTSI for detecting sensor signals
- Interface for the Festo installation system CPI
- Direct and easy networking of valve terminals and other devices via a bus connection
- Wide range of applications thanks to high degree of protection to IP65/67
- Universal connection technology (Sub-D, M12, terminal strip)
- Optional decentralised installation of the bus node for connecting two valve terminals
- Basic diagnostics: undervoltage, short circuit

CTEU for the universal use of valve terminals. Thanks to the Festo-specific standardised definition of the interface (I-Port), the fieldbus modules can be used for different types of valve terminal.

The following protocols are currently supported:

- CANopen
- DeviceNet®
- CC-LINK®
- PROFIBUS
- EtherCAT®
- AS-Interface
- PROFINET
- EtherNet/IP
- VARAN
- Installation system CPI
- IO-Link®

### Valve terminal configurator

A valve terminal configurator is available online to help you select a suitable valve terminal.

Select a valve terminal with I-Port interface and order the relevant CTEU bus nodes. The bus nodes then only need to be placed on the valve terminal.

The ident. code for the valve terminals specifies the valve functions, the number of valves, the vacant valve positions as well as the additional functions and the type of compressed air supply.

As is the case with all Festo products, all valve terminals are supplied:

Online at: → [www.festo.com](http://www.festo.com)

- Fully pre-assembled
- Equipped with fittings on request
- Tested for electrical functionality
- Tested for pneumatic functionality
- Securely packaged
- User documentation can be downloaded free of charge

## Key features

### Fieldbus systems with CTEU



#### CANopen

CANopen was originally developed for the automotive industry by a joint venture led by Bosch. It has been maintained by the organisation CiA (CAN in Automation) since 1995, and at the end of 2002 it was standardised as European standard EN 50325-4.



#### DeviceNet®

DeviceNet® is an open fieldbus standard that was developed by Rockwell Automation on the basis of the CAN protocol. DeviceNet® is standardised in European standard EN 50325.



#### CC-LINK®

"Control and Communications Link" (CC-Link) was developed by Mitsubishi Electric and has been available as an open fieldbus network since 1999.



#### PROFIBUS

Process Field Bus (PROFIBUS) is a fieldbus that was developed by Siemens and has been standardised in the IEC 61158 series of international standards. It enables communication between devices without the need for any specific adaptations to the interface.



#### EtherCAT®

EtherCAT® is a bus with real-time capability; it was developed by Beckhoff and the EtherCAT Technology Group (ETG). EtherCAT® is an open technology and has been standardised in international standards IEC 61158 and IEC 61784 and in ISO 15745-4.



#### AS-Interface

AS-Interface is a manufacturer-independent, easy and sturdy installation system. It was developed and represented by the AS-International Association, a loose association of various companies from different sectors. AS-Interface has been standardised by IEC 620262 and EN 50295.



#### PROFINET

PROFINET by PROFIBUS and PROFINET International (PI) is the open industrial Ethernet standard for automation and is based on Ethernet TCP/IP and IT standards. PROFINET technology is developed by Siemens and the PROFIBUS user organisation. PROFINET is standardised in IEC 61158 and IEC 61784.



#### EtherNet/IP

EtherNet/IP was developed by Allen-Bradley (Rockwell Automation) and the ODVA (Open DeviceNet Vendor Association). EtherNet/IP is an open standard (technology based on Ethernet TCP/IP and UDP/IP) for industrial networks and is standardised in the IEC 61158 series of international standards.



#### VARAN

VARAN (Versatile Automation Random Access Network) is a real-time-capable Ethernet bus system that meets the highest requirements when it comes to flexibility and availability. It is an open bus system developed by Austrian company Sigmatek.

#### Installation system CPI

The CPI system is capable of meeting two completely different requirements and resolves the conflict between extensive decentralised modularisation and electrical installation.

All CP valve terminals and CP modules are connected using a ready-to-install CP cable, and routed to the CP interface. Every 4 modules make up an installation string that ends at the CP interface.



#### IO-Link®

IO-Link® consists of a central master and the IO-Link® devices connected by special connecting cables. This permits a decentralised layout of the devices.

## Key features

### Integration of the I-Port interface/IO-Link®

Different bus nodes are used for integration in the control systems of various manufacturers.

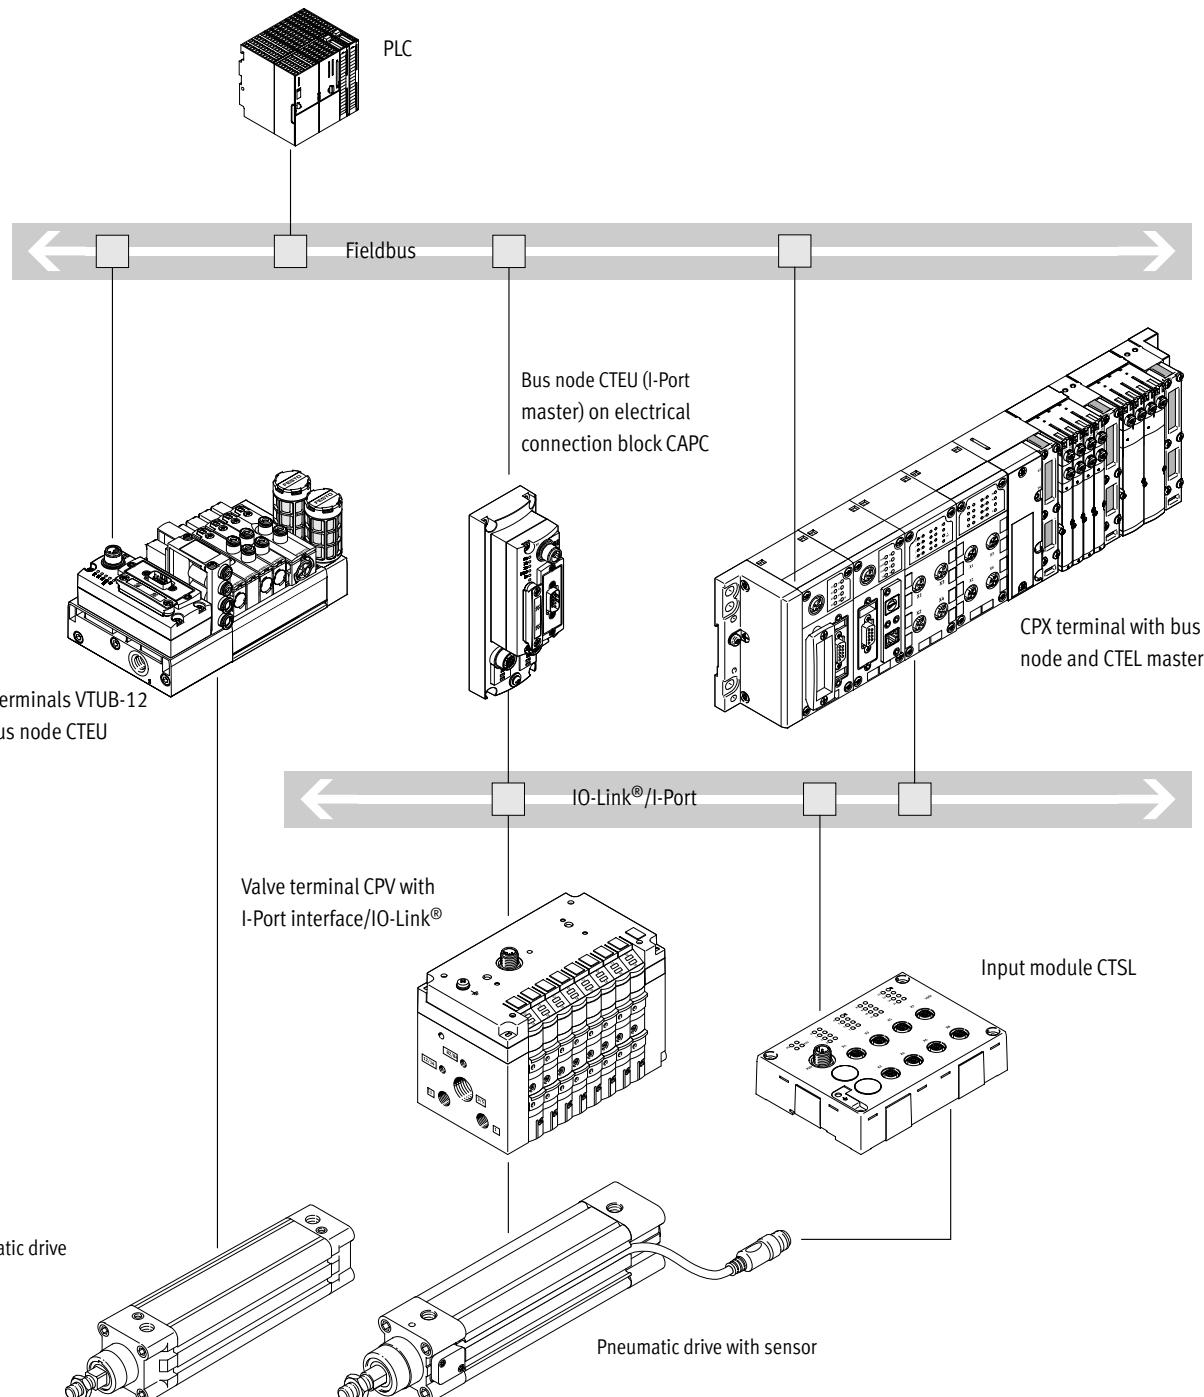
The following protocols are supported with the compatible bus node CTEU:

- CANopen
- DeviceNet®
- EtherCAT®
- CC-LINK®

- PROFIBUS
- AS-Interface
- PROFINET
- EtherNet/IP
- VARAN
- Installation system CPI
- IO-Link®

A second valve terminal can be connected via an electrical connection block (decentralised adapter).  
(→ p.6)

### System overview, example



- Communication with the higher-order controller via fieldbus

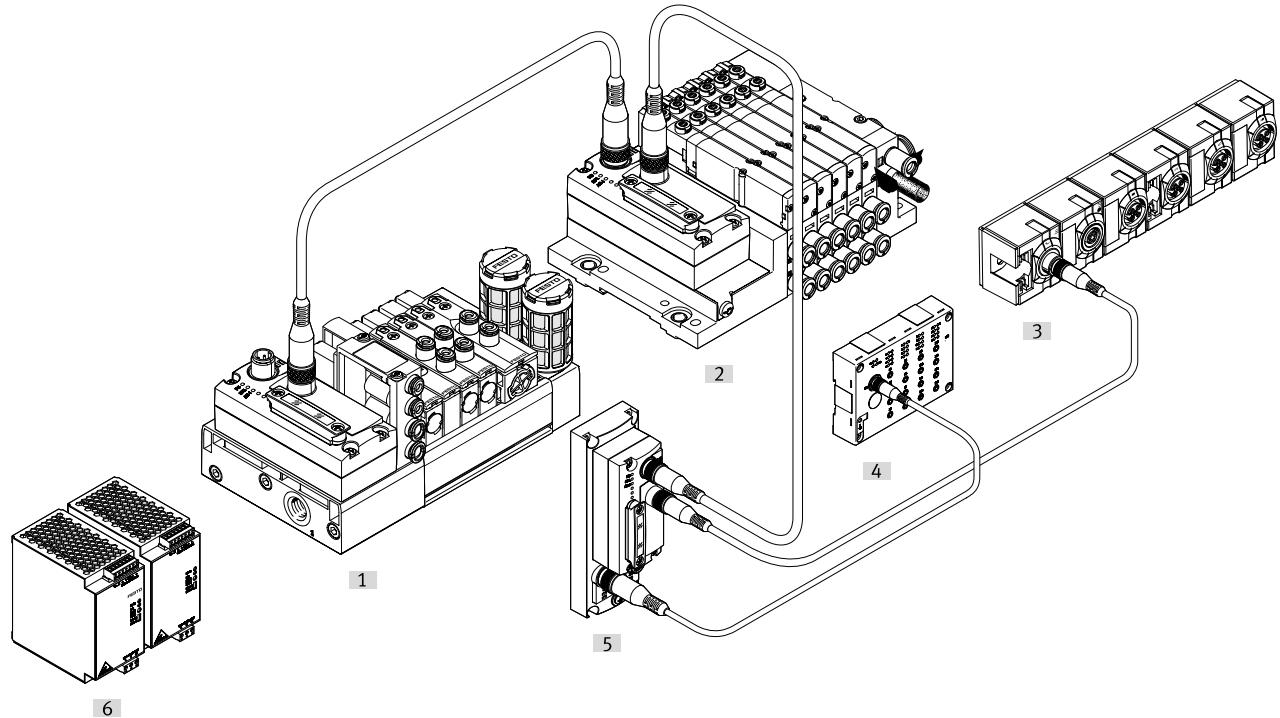
- Use a fieldbus node CTEU compatible with the fieldbus protocol

- Up to 64 inputs/outputs (solenoid coils), depending on the valve terminal

## Key features

### System overview

Example CTEU-AS interface



[1] AS-Interface gateway CESA

[2] Valve terminal MPA-L with  
bus node CTEU-AS

[3] Compact AS-Interface

I/O modules

[4] Input module CTSL

[5] Electrical connection block CAPC,

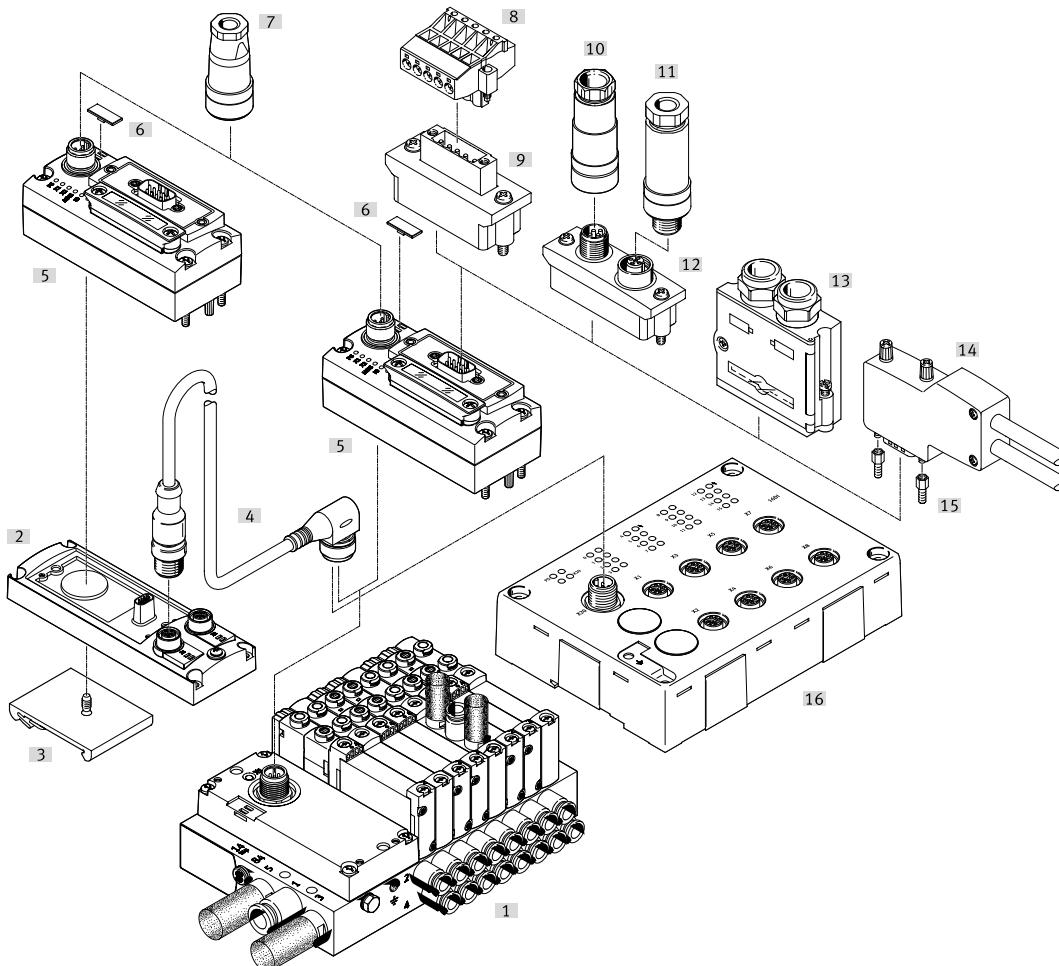
decentralised installation with  
bus node CTEU-AS

[6] Power supply unit CACN for

AS-Interface systems

## Peripherals overview

## Overview of CTEU with valve terminal VTUG



## Accessories

	Type	Brief description	→ Page/Internet	
[1]	Manifold rail	VABM	With I-Port interface, for connecting max. 35 valves	vtug
[2]	Electrical connection block	CAPC	For connecting a further terminal (2x I-Port interface)	12
[3]	DIN rail adapter	CAF.M	For electrical connection block CAPC	13
[4]	Connecting cable	NEBA	For IO-Link®	11, 13
[5]	Bus node	CTEU	–	14, 19, 24, 29, 35, 40, 44, 49, 54, 59
[6]	Inscription labels	ASLR	For bus node	58
[7]	Power supply socket	NTSD/NECB	For power supply	18, 23, 33
[8]	Terminal strip	FBSD-KL	For open style connection	18, 23
[9]	Bus connection	FBA-1	Open style for 5-pin terminal strip	18, 23
[10]	Fieldbus socket	NECB, NECU	For micro style connection, M12, 5-pin	18, 33
[11]	Plug	FBS, NECU	For micro style connection, M12, 5-pin	18, 33
[12]	Bus connection	FBA-2	Micro style, 2xM12, 5-pin	18, 23, 33
[13]	Plug	FBS-SUB-9-BU	Sub-D	18, 23, 33
[14]	Plug	FBS-SUB-9-WS	Sub-D, angled	18, 33
[15]	Threaded sleeve	UNC	Sub-D mounting bolt	18, 23, 33
[16]	Input module	CTSL-D-16E	–	86

## Key features – Diagnostics

### System diagnostics CTEU

#### Diagnostics LED on the bus node CTEU

The fieldbus-specific LEDs indicate the communication status and the fieldbus function.

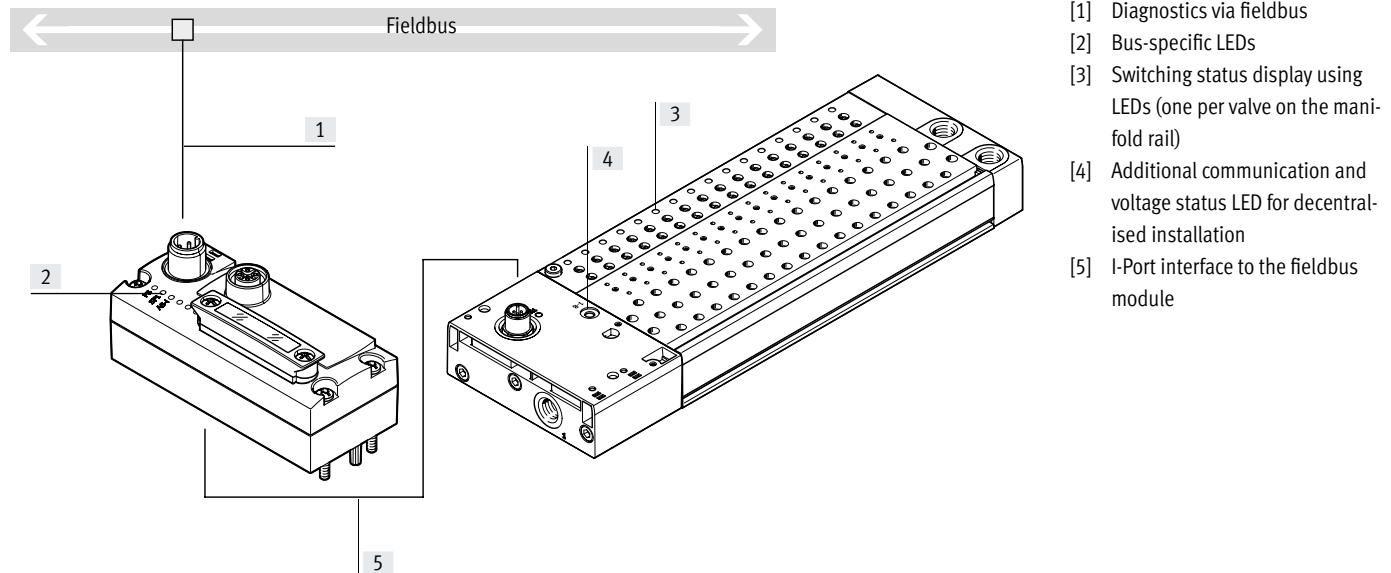
A further LED indicates the status of the power supply:

- Undervoltage/short circuit
- Power supply ensured
- Interruption of voltage

#### Diagnostic messages via the fieldbus

- Configuration error
- Short circuit/overload of an output module

- Short circuit/undervoltage
- Undervoltage/load voltage of the valves



## Key features – Power supply

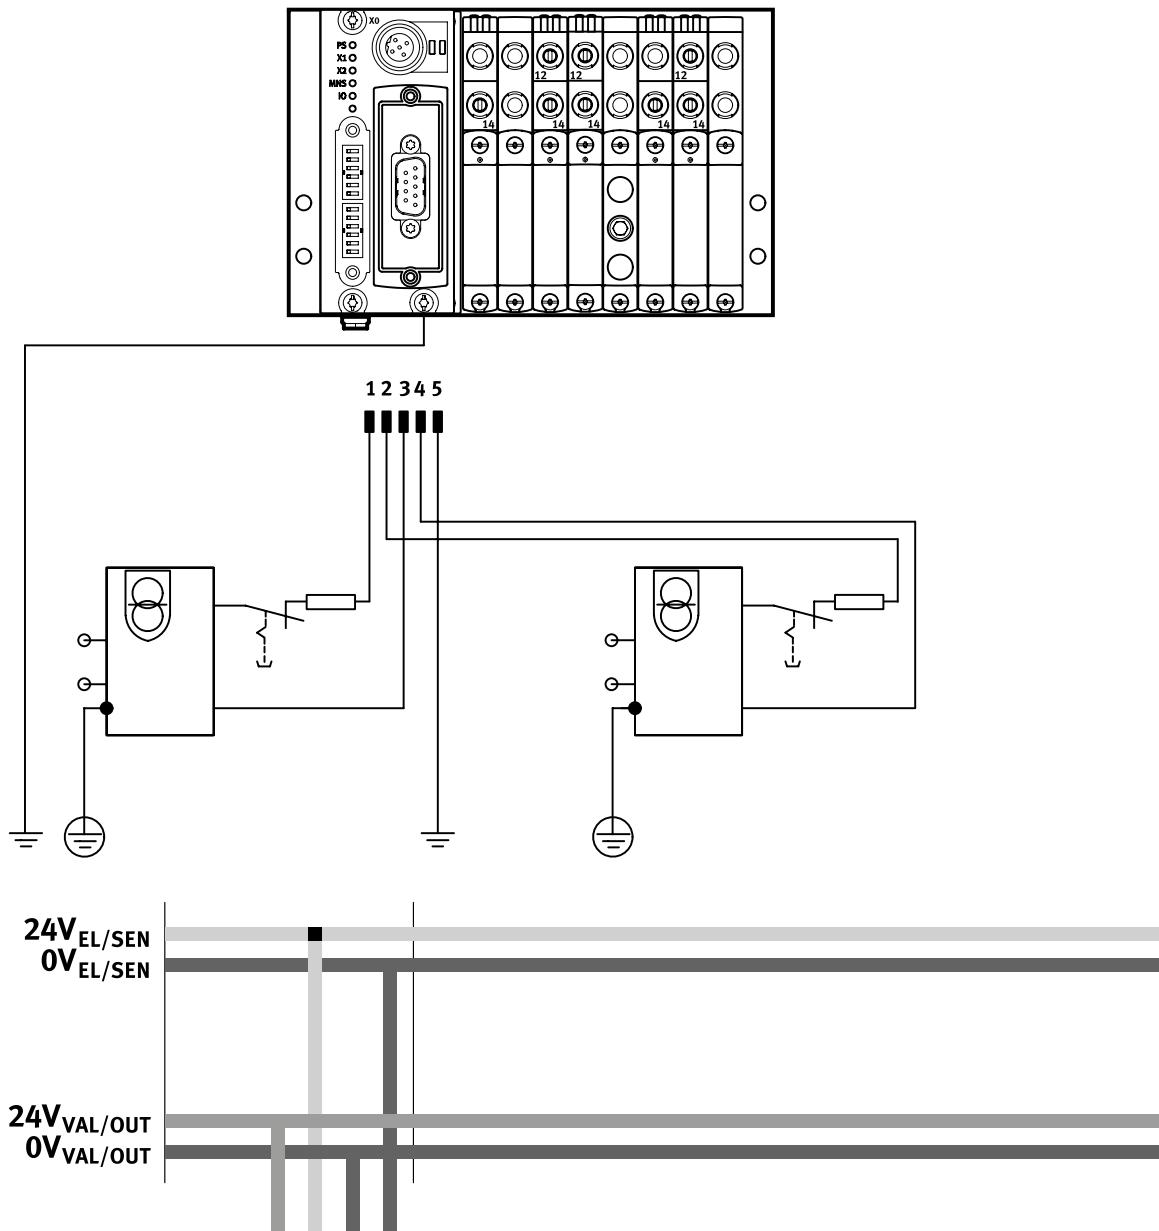
### Operating voltage and load current supply

The operating voltages for the valve terminal with I-Port interface are centrally connected to the bus node via a 5-pin M12 plug.

The operating voltages are required for the bus node electronics and the load supply to the valves (supplied separately from the electronics supply).

The power supplies do not have a common 0 V line and are thus completely galvanically isolated from one another.

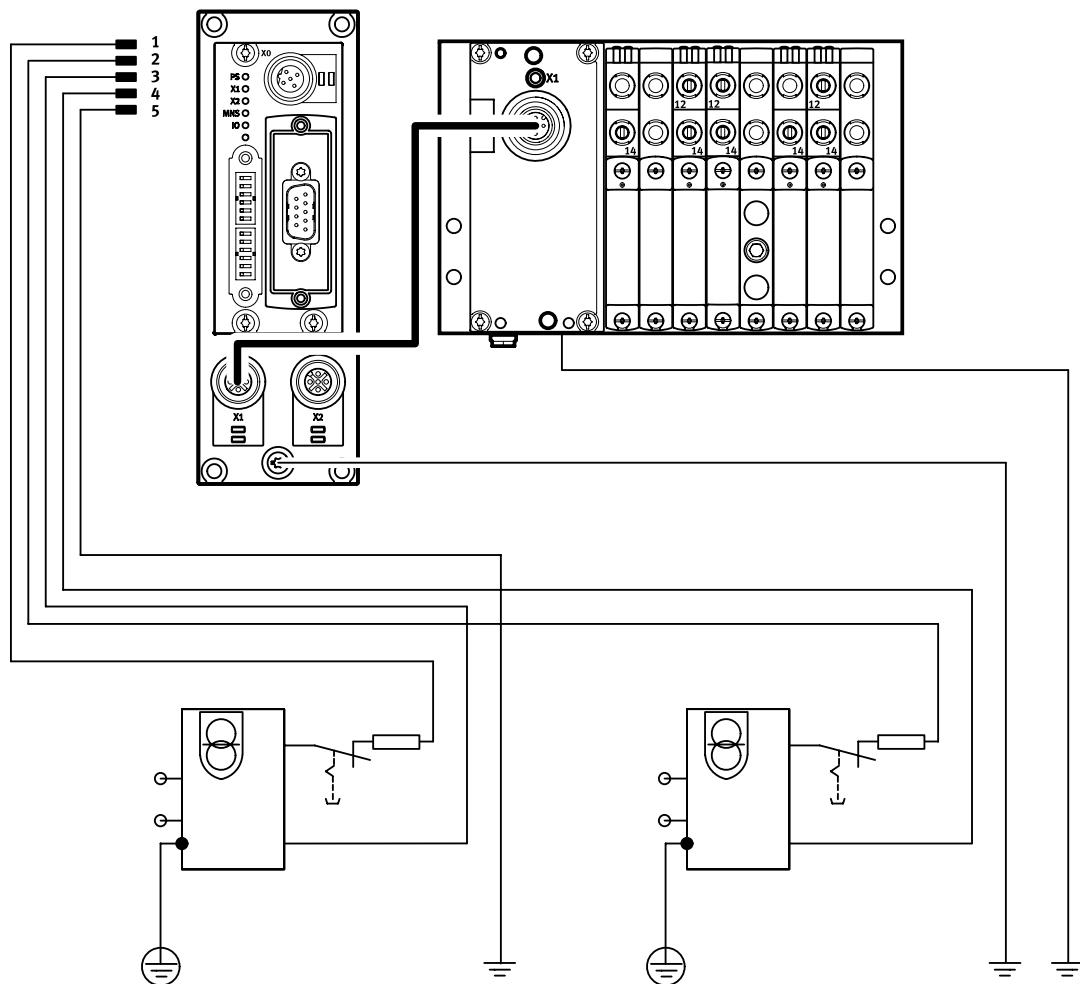
Example power supply concept CTEU with valve terminal VTUG



## Key features – Power supply

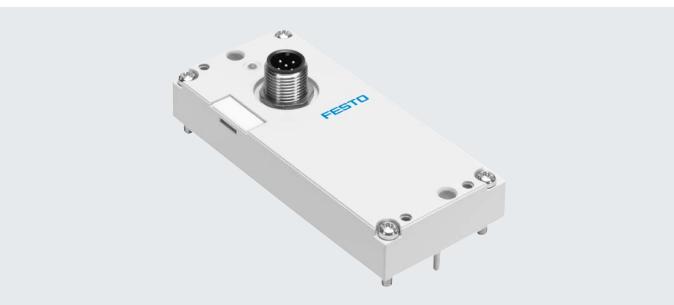
### Power supply concept

Example power supply concept CTEU with electrical connection block (decentralised adapter) CAPC and valve terminal VTUG



## Datasheet – I-Port interface/IO-Link® for valve terminal VTUG

Festo-specific, standardised interface for direct connection to the fieldbus by mounting the bus node CTEU or to an IO-Link® master via a cable (in IO-Link® mode).

**I-Port interface/IO-Link®**

Versions:

- I-Port interface for bus nodes (CTEU)
  - IO-Link® mode for direct connection to a higher-level IO-Link master
- The electrical supply/transmission of communication takes place via an M12 plug.

**General technical data**

Types of communication	IO-Link®	
Electrical connection	<ul style="list-style-type: none"> <li>• M12 plug, 5-pin</li> <li>• A-coded</li> <li>• Metal thread for shielding</li> </ul>	
Baud rates	COM3	[kbps]
	COM2	[kbps]
Intrinsic current consumption, logic supply PS		[mA]
Intrinsic current consumption, valve supply PL		[mA]
Max. number of solenoid coils	VAEM-L1-S-8-PT	16
	VAEM-L1-S-16-PT	32
	VAEM-L1-S-24-PT	48
Max. number of valve positions	VAEM-L1-S-8-PT	8
	VAEM-L1-S-16-PT	16
	VAEM-L1-S-24-PT	24
Ambient temperature	[°C]	-5 ... +50
Degree of protection to EN 60529		IP67

**LED indicator**

	Colour	Status	Function
Status LED X1	Red/green	Off	No 24 V logic
	2	Status green	Everything OK
	3	Flashing green	Communication error (in the I-Port or IO-Link® protocol)
	4	Flashing red/green	Load supply error (undervoltage or no-load supply)
	5	Static red	Load supply error and communication error

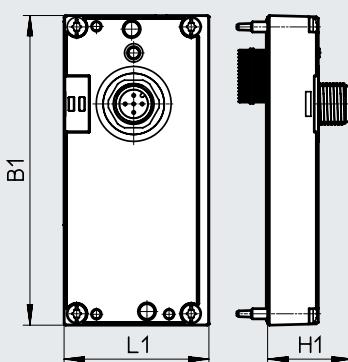
**Pin assignment – I-Port interface/IO-Link®**

	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)

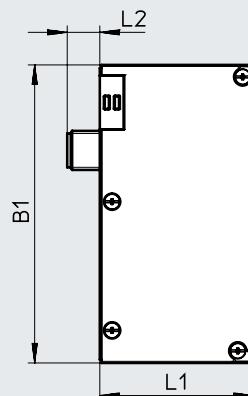
## Datasheet – I-Port interface/IO-Link® for valve terminal VTUG

## Dimensions

Outlet on top



Outlet on the side

Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	Outlet on top	H1	B1	Outlet on the side	L1	L2
VAEM-L1-S-...	91	47.1	25	91.5	47.1	10	

Accessories – I-Port interface/IO-Link®					
Description	Part no.	Type			
<b>Electrical interface for I-Port interface/IO-Link®, outlet on top</b>					
	Actuation of up to 8 double solenoid valve positions	573384	VAEM-L1-S-8-PT		
	Actuation of up to 16 double solenoid valve positions	573939	VAEM-L1-S-16-PT		
	Actuation of up to 24 double solenoid valve positions	573940	VAEM-L1-S-24-PT		
<b>Electrical interface for I-Port interface/IO-Link®, outlet on the side</b>					
	Actuation of up to 8 double solenoid valve positions	574207	VAEM-L1-S-8-PTL		
	Actuation of up to 16 double solenoid valve positions	574208	VAEM-L1-S-16-PTL		
	Actuation of up to 24 double solenoid valve positions	574209	VAEM-L1-S-24-PTL		
<b>Connection technology for IO-Link</b>					
	T-adapter M12, 5-pin for IO-Link® and load supply	171175	FB-TA-M12-5POL		
<b>Straight plug, for I-Port/IO-Link®</b>					
	Straight plug, M12, 5-pin (in combination with adapter for separate load supply)	8162296	NECB-S-M12G5-C2		
<b>Inscription label for I-Port/IO-Link®</b>					
	Frame with 40 labels	565306	ASLR-C-E4		
<b>Connecting cable</b>					
	Straight – angled	Suitable for energy chains	5 m	574321	NEBU-M12G5-E-5-Q8N-M12G5
	Angled – angled		7.5 m	574322	NEBU-M12G5-E-7.5-Q8N-M12G5
	Straight – angled	Standard	10 m	574323	NEBU-M12G5-E-10-Q8N-M12G5
	Angled – angled		0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
	Straight – angled			8003617	NEBU-M12G5-K-0.5-M12W5
	Angled – angled		2 m	570734	NEBU-M12W5-K-2-M12W5
	Straight – angled			8003618	NEBU-M12G5-K-2-M12W5

## Datasheet – Electrical connection block CAPC

**Function**

With the electrical connection block CAPC, the bus nodes CTEU can be installed decentrally on a valve terminal or input modules with I-Port interface.

**Area of application**

- M12 connection technology (two interfaces)
- Enables the installation of valve terminals or other devices over a distance of 20 metres
- With the accessory CAFM, the connection block can be installed on a DIN rail

**General technical data**

Type	CAPC-F1-E-M12	
Dimensions W x L x H	[mm]	50x148x28
Fieldbus interface		2 x M12 socket, 5-pin, A-coded
Operating voltage range	[V DC]	18 ... 30
Max. power supply	[A]	2
Nominal operating voltage	[V DC]	24
Product weight	[g]	85
Cable length	[m]	20

**Materials**

Housing	Reinforced PA
Note on materials	RoHS-compliant

**Operating and environmental conditions**

Degree of protection to EN 60529	IP65, IP67
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +70
Corrosion resistance class CRC	2 <sup>1)</sup>
CE marking (see declaration of conformity)	To EU EMC Directive <sup>2)</sup>

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

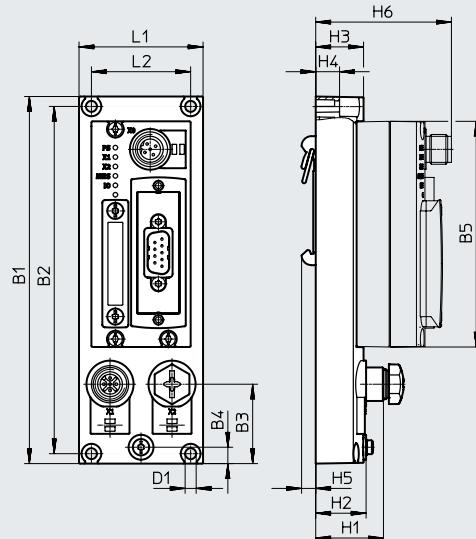
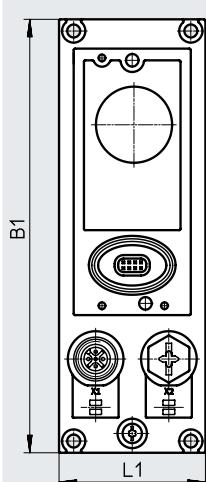
## Datasheet – Electrical connection block CAPC

## Dimensions

CAPC


Download CAD data → [www.festo.com](http://www.festo.com)

CAPC with mounted bus node CTEU-CO



Type	B1	B2	B3	B4	B5	D1	H1	H2	H3	H4	H5	H6	L1	L2
CAPC	148	140	32	6.6	91	4.4	27.3	20.3	19.3	9.6	5.7	54.8	50	40

## Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
Housing, FE		Functional earth

## Accessories CAPC

Description	Part no.	Type
<b>Electrical connection block</b>		
	570042	CAPC-F1-E-M12
<b>DIN rail mounting</b>		
	570043	CAFAM-F1-H
<b>Connecting cable</b>		
	Straight – angled	Suitable for energy chains
	5	574321 NEBU-M12G5-E-5-Q8N-M12G5
	7.5	574322 NEBU-M12G5-E-7.5-Q8N-M12G5
	10	574323 NEBU-M12G5-E-10-Q8N-M12G5
	Angled – angled Straight – angled Angled – angled Straight – angled	Standard
	0.5 m	570733 NEBU-M12W5-K-0.5-M12W5
		8003617 NEBU-M12G5-K-0.5-M12W5
	2 m	570734 NEBU-M12W5-K-2-M12W5
		8003618 NEBU-M12G5-K-2-M12W5

## Datasheet – CTEU-CO



The bus node handles communication between the valve terminal and a higher-order CANopen® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.

**Application**

## Fieldbus connection

The bus connection is established via a 9-pin Sub-D plug as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).

The bus connector plug (with IP65/ IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

There are 4 contacts available for each of the conductors (CAN\_L/CAN\_H and 24 V/0 V optional) of the incoming and outgoing bus cables.

The fieldbus parameters and the basic device parameter settings are set on the bus node via DIL switches.

## Implementation

## Protocol chip used:

- CAN transceiver 82C251

## Possible transmission rate:

- 125 kbps
- 250 kbps
- 500 kbps
- 1 Mbps

## Max. CANopen cable length (trunk cable):

- 40 m at 1 Mbps
- 100 m at 500 kbps
- 250 m at 250 kbps
- 500 m at 125 kbps

## Max. branch cable length (drop cable):

- 0.30 m at 1 Mbps
- 0.75 m at 500 kbps
- 2.00 m at 250 kbps
- 3.75 m at 125 kbps

The following variants can be realised using an adapter:

- 2 x micro style M12, degree of protection IP65, 5-pin, plug and socket
- Open style plug, degree of protection IP20, 5-pin, pin

**General technical data****Fieldbus interface**

Protocol	CANopen	
Function	Bus connection incoming/outgoing	
Transmission rate	[kbps]	125, 250, 500 and 1000
Type	CAN bus	
Connection type	Plug	
Connection technology	Sub-D	
Number of pins/cores	9	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
Note: Optional connection technology with accessories:	Micro style (plug/socket M12x1 A-coded, 5-pin, degree of protection IP65) Open style (terminal strip, 5-pin, degree of protection IP20) Open style (screw terminal, 5-pin, degree of protection IP20)	

**Inputs/outputs**

Max. address volume inputs	[byte]	8
Note on inputs	[byte]	Expandable to max. 16
Max. address volume for outputs	[byte]	8
Note on outputs	[byte]	Expandable to max. 16

## Datasheet – CTEU-CO

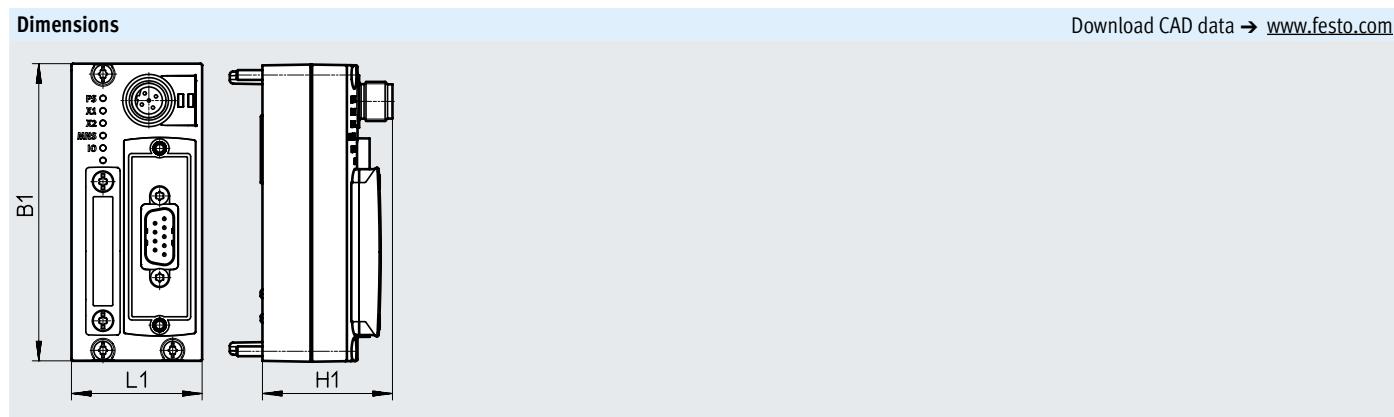
<b>General data</b>		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Diagnostic behaviour Fail-safe response
Additional functions		Emergency message Acyclic data access via SDO
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	MNS: Network status IO: I/O status
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, B-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-CO

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Type	B1	H1	L1
CTEU-CO	91	39.8	40








Pin allocation	Pin	Assignment	Description
<b>Sub-D, 9-pin, CANopen interface</b>			
1	n.c.	Not connected	
2	CAN_L	Received/transmitted data low	
3	CAN_GND	0 V CAN interface (connected to pin 6)	
4	n.c.	Not connected	
5	CAN_Shld	Optional shielded connection	
6	GND	0 V CAN interface, optional (connected to pin 3)	
7	CAN_H	Received/transmitted data high	
8	n.c.	Not connected	
9	CAN_V+	24 V DC supply CAN interface	
Housing		Cable shielding, connection to functional earth FE	

Power supply, M12, B-coded	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	5	FE	Functional earth

## Datasheet – CTEU-CO

Pin assignment – CANopen interface			
	Pin	Assignment	Description
<b>Micro style bus connection (M12)</b>			
Incoming	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
<b>Open style bus connection</b>			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Shielding	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface
<b>Connection and display components</b>			
1	3	[1] Status LED (operating status/diagnostics) [2] DIL switch [3] Power supply for bus node and connected devices (valve terminal) [4] Fieldbus interface (Sub-D plug)	
2	4		

## Accessories – CTEU-CO

Ordering data		Part no.	Type
<b>Bus node</b>			
	CANopen bus node	570038	CTEU-CO
<b>Bus connection</b>			
	Sub-D socket, straight	532219	FBS-SUB-9-BU-2x5POL-B
	Sub-D socket for CANopen with terminating resistor and programming interface	574588	NECU-S1W9-C2-ACO
	Sub-D socket, angled	533783	FBS-SUB-9-WS-CO-K
	Micro style bus connection, 2xM12, 5-pin, A-coded	525632	FBA-2-M12-5POL
	Socket for micro style connection, A-coded	8162291	NECB-M12G5-C2
	Plug for micro style connection, M12, 5-pin, A-coded	8162296	NECB-S-M12G5-C2
	Open style bus connection	525634	FBA-1-SL-5POL
	Terminal strip for open style connection, 5-pin	525635	FBSD-KL-2x5POL
<b>Fitting</b>			
	Threaded sleeve for Sub-D	533000	UNC4-40/M3X8
<b>Plug socket</b>			
	For power supply	538999	NTSD-GD-9-M12-5POL-RK
<b>User documentation</b>			
	User documentation – bus node CTEU-CO	German	573767 P.BE-CTEU-CO-OP+MAINT-DE
		English	573768 P.BE-CTEU-CO-OP+MAINT-EN
		Spanish	573769 P.BE-CTEU-CO-OP+MAINT-ES
		French	573770 P.BE-CTEU-CO-OP+MAINT-FR
		Italian	573771 P.BE-CTEU-CO-OP+MAINT-IT
		Chinese	573772 P.BE-CTEU-CO-OP+MAINT-ZH

## Datasheet – CTEU-DN



The bus node handles communication between the valve terminal and a higher-order DeviceNet® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. Up to 8 byte inputs and 8 byte outputs are typically transmitted in the cyclic process image.

**Application****Fieldbus connection**

The bus connection is established via a 9-pin Sub-D plug with a typical allocation (to EN 50170).

The bus connector plug (with degree of protection IP65/IP67 from Festo or degree of protection IP20 from other

manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

The fieldbus parameters and the basic device parameter settings are set on the bus node via DIL switches.

**Implementation**

Protocol chip used:

- CAN transceiver 82C251

Possible transmission rate:

- 125 kbps
- 250 kbps
- 500 kbps

Max. DeviceNet® cable length (trunk cable):

- 100 m at 500 kbps
- 250 m at 250 kbps
- 500 m at 125 kbps

Max. branch cable length (drop cable):

- 6 m at 500 kbps
- 6 m at 250 kbps
- 6 m at 125 kbps

The following variants can be realised using an adapter:

- 2 x micro style M12, degree of protection IP65, 5-pin, plug and socket
- Open style plug, degree of protection IP20, 5-pin, pin

**General technical data****Fieldbus interface**

Protocol	DeviceNet®	
Transmission rate	[kbps]	125, 250, 500
Type	CAN bus	
Connection type	Plug	
Connection technology	Sub-D	
Number of pins/cores	9	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
Note: Optional connection technology with accessories:	Micro style (plug/socket M12x1 A-coded, 5-pin, degree of protection IP65) Open style (terminal strip, 5-pin, degree of protection IP20) Open style (screw terminal, 5-pin, degree of protection IP20)	

**Inputs/outputs**

Max. address volume inputs	[byte]	8
Max. address volume for outputs	[byte]	8

## Datasheet – CTEU-DN

<b>General data</b>		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Diagnostic behaviour Fail-safe and idle response
Additional functions		Acyclic data access via "Explicit Message" QuickConnect System status can be displayed using process data
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	MNS: Network status IO: I/O status
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, B-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA, PC
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-DN

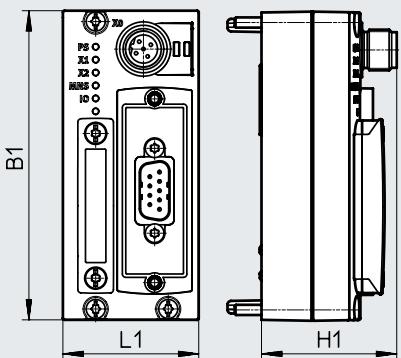
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Dimensions

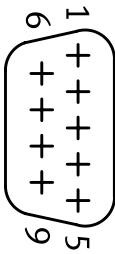
Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	L1
CTEU-DN	91	39.8	40

## Pin allocation


Pin	Assignment	Description
-----	------------	-------------

## Sub-D, 9-pin, DeviceNet® interface





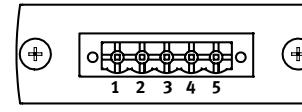
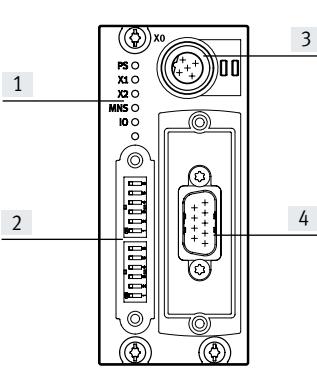
1	n.c.	Not connected
2	CAN_L	Received/transmitted data low
3	CAN_GND	0 V CAN interface (connected to pin 6)
4	n.c.	Not connected
5	CAN_Shld	Optional shielded connection
6	GND	0 V CAN interface, optional (connected to pin 3)
7	CAN_H	Received/transmitted data high
8	n.c.	Not connected
9	CAN_V+	24 V DC supply CAN interface
Housing		Cable shielding, connection to functional earth FE

## Power supply, M12, B-coded








1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
5	FE	Functional earth

## Datasheet – CTEU-DN

Pin allocation	Pin	Assignment	Description
<b>Micro style bus connection (M12)</b>			
Incoming	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
<b>Open style bus connection</b>			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Shielding	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface
<b>Connection and display components</b>			
	[1]	Status LED (operating status/diagnostics)	
	[2]	DIL switch	
	[3]	Power supply for bus node and connected devices (valve terminal)	
	[4]	Fieldbus interface (Sub-D plug)	

## Accessories – CTEU-DN

Ordering data		Part no.	Type	
<b>Bus node</b>				
	DeviceNet® bus node	570039	CTEU-DN	
<b>Bus connection</b>				
	Sub-D socket, straight	532219	FBS-SUB-9-BU-2x5POL-B	
	Micro style bus connection, 2xM12, 5-pin, A-coded	525632	FBA-2-M12-5POL	
	Socket for micro style connection, M12, 5-pin	8162291	NECB-M12G5-C2	
	Plug for micro style connection, M12, 5-pin	8162296	NECB-S-M12G5-C2	
	Open style bus connection	525634	FBA-1-SL-5POL	
	Terminal strip for open style connection, 5-pin	525635	FBSD-KL-2x5POL	
<b>Fitting</b>				
	Threaded sleeve for Sub-D	533000	UNC4-40/M3X8	
<b>Plug socket</b>				
	For power supply	538999	NTSD-GD-9-M12-5POL-RK	
<b>User documentation</b>				
	User documentation – bus node CTEU-DN	German	573744	P.BE-CTEU-DN-OP+MAINT-EN
		English	573745	P.BE-CTEU-DN-OP+MAINT-EN
		Spanish	573746	P.BE-CTEU-DN-OP+MAINT-ES
		French	573747	P.BE-CTEU-DN-OP+MAINT-FR
		Italian	573748	P.BE-CTEU-DN-OP+MAINT-IT
		Chinese	573779	P.BE-CTEU-DN-OP+MAINT-ZH

## Datasheet – CTEU-CC

**CC-Link**

The bus node handles communication between the valve terminal and a higher-order master for Control & Communication Link (CC-Link®).

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.

**Application**

## Fieldbus connection

The bus connection is established via a screw terminal with degree of protection IP20, a 9-pin Sub-D socket with degree of protection IP65/IP67 from Festo or a Sub-D socket with degree of protection IP20 from other manufacturers.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Both connection types have the function of an integrated T-distributor and thus support the connection of an incoming and outgoing bus cable.

The integrated interface with RS485 transmission technology is designed for the typical CC-Link 3-conductor connection technology (in accordance with CLPA CC-Link Spec. V1.1).

## Implementation

## Protocol chip used:

- MFP3 from Mitsubishi

When using branch lines: maximum branch line length 8 m, maximum 6 stations per branch line

The following variant can be realised using an adapter:

- Spring-loaded terminal with degree of protection IP65

Maximum CC-Link cable length  
(minimum 0.2 m between devices):

- 100 m at 10 Mbps
- 150 m at 5 Mbps
- 200 m at 2.5 Mbps
- 600 m at 625 kbps
- 1200 m at 156 kbps

Length of main string:

- 100 m at 625 kbps, total length of branch line 50 m
- 500 m at 156 kbps, total length of branch line 200 m

Higher baud rates not permitted with a branch line.

**General technical data****Fieldbus interface**

Protocol	CC-LINK®	
Function	Bus connection incoming/outgoing	
Transmission rate	[kbps]	156 ... 10000
Type	Serial interface	
Connection type	Socket	
Connection technology	Sub-D	
Number of pins/cores	9	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
Note: Optional connection technology with accessories:	Open style (screw terminal, 5-pin, degree of protection IP20)	

**Inputs/outputs**

Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

## Datasheet – CTEU-CC

<b>General data</b>		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Activating diagnostics Fail-safe and idle response
Additional functions		System status can be displayed using process data
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	Err: Data transmission error Run: Bus active
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 70
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-CC

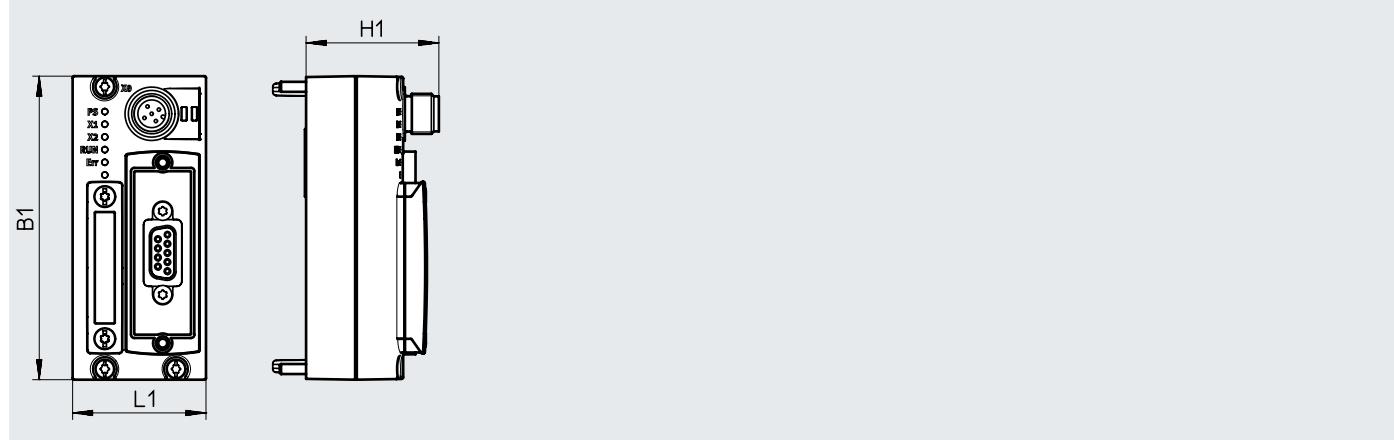
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	L1
CTEU-CC	91	39.8	40

## Pin allocation

	Pin	Assignment	Description
--	-----	------------	-------------

Sub-D, 9-pin, CC-Link interface			
	1	n.c.	Not connected
	2	DA	Data transmission line A
	3	DG	Data transmission line ground (data reference potential)
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	n.c.	Not connected
	7	DB	Data transmission line B
	8	n.c.	Not connected
	9	n.c.	Not connected
Housing			Cable shielding, connection to functional earth FE

## Power supply, M12, A-coded

	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	5	FE	Functional earth



## Datasheet – CTEU-CC

Pin allocation		
Terminal assignment	Pin	Description
<b>Bus connection, FBS-SUB-9-GS-24XPOL-B</b>		
	DA	Data transmission line A
	DB	Data transmission line B
	DG	Data transmission line ground (data reference potential)
	n.c.	Not connected
	FE	Connected to the housing of the Sub-D plug with a clamping clip

Connection and display components
<p>The front panel diagram shows the following components:</p> <ul style="list-style-type: none"> <li>[1] Status LED (operating status/diagnostics)</li> <li>[2] DIL switch</li> <li>[3] Power supply for bus node and connected devices (valve terminal)</li> <li>[4] Fieldbus interface (Sub-D socket)</li> </ul>

## Accessories – CTEU-CC

Ordering data		Part no.	Type
<b>Bus node</b>			
	CC-Link® bus node	1544198	CTEU-CC
<b>Bus connection</b>			
	Sub-D plug, straight	532220	FBS-SUB-9-GS-2x4POL-B
<b>Fitting</b>			
	Threaded sleeve for Sub-D	533000	UNC4-40/M3X8
<b>Plug socket</b>			
	For power supply, M12x1, 5-pin	8162291	NECB-M12G5-C2

## Datasheet – CTEU-PB



The bus node handles communication between the valve terminal and a higher-order master for PROFIBUS DP®.

The module has basic diagnostic functions. It has 4 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.

**Application**

## Fieldbus connection

The bus connection is established via a 9-pin Sub-D socket with the typical PROFIBUS allocation (to EN 50170).

The bus connector plug (with IP65/IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

An active bus terminal can be connected using the DIL switch integrated in the plug.

The Sub-D interface is designed for controlling network components with a fibre-optic cable connection.

## Transmission rate/overview of cable lengths

- RS 485 transceiver used: Analog Devices ADM 2485
- PROFIBUS slave controller used: Profichip VPC+S

Possible transmission rate:	Maximum fieldbus length:	Maximum branch line length:
9.6 kbps	1200 m	500 m
19.2 kbps	1200 m	500 m
93.75 kbps	1200 m	100 m
187.5 kbps	1000 m	33.3 m
500 kbps	400 m	20 m
1.5 Mbps	200 m	6.6 m
3 Mbps ... 12 Mbps	100 m	–

**General technical data****Fieldbus interface**

Protocol	PROFIBUS DP	
Function	Bus connection incoming/outgoing	
Transmission rate	[kbps]	9.6, 19.2, 93.75, 187.5, 500
	[Mbps]	1.5, 12
Type	PROFIBUS	
Connection type	Socket	
Connection technology	Sub-D	
Number of pins/cores	9	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
Note: Optional connection technology with accessories:	Plug/socket M12x1 B-coded, 5-pin, degree of protection IP65	

**Inputs/outputs**

Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

## Datasheet – CTEU-PB

General data		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Diagnostic behaviour Fail-safe response
Additional functions		Emergency message System status via diagnostic test
Configuration support		GSD file
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	BF: Bus fault
Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 100
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5
Technical data – Mechanical components		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
Materials		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-PB

Operating and environmental conditions		
Type	CTEU-PB	CTEU-PB-EX1C
Ambient temperature [°C]	-5 ... +50	-5 ... +50
Storage temperature [°C]	-20 ... +70	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>	2	2
CE marking (see declaration of conformity) <sup>3)</sup>	To EU EMC Directive <sup>2)</sup> To EU RoHS Directive	To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>	To UK EMC regulations <sup>2)</sup> To UK RoHS regulations	To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking	KC EMC	–
Certification	c UL us - Listed (OL) RCM	c UL us - Listed (OL) RCM
Degree of protection	IP65/IP67	IP65/IP67
Note on degree of protection	In mounted state Unused connections sealed	In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

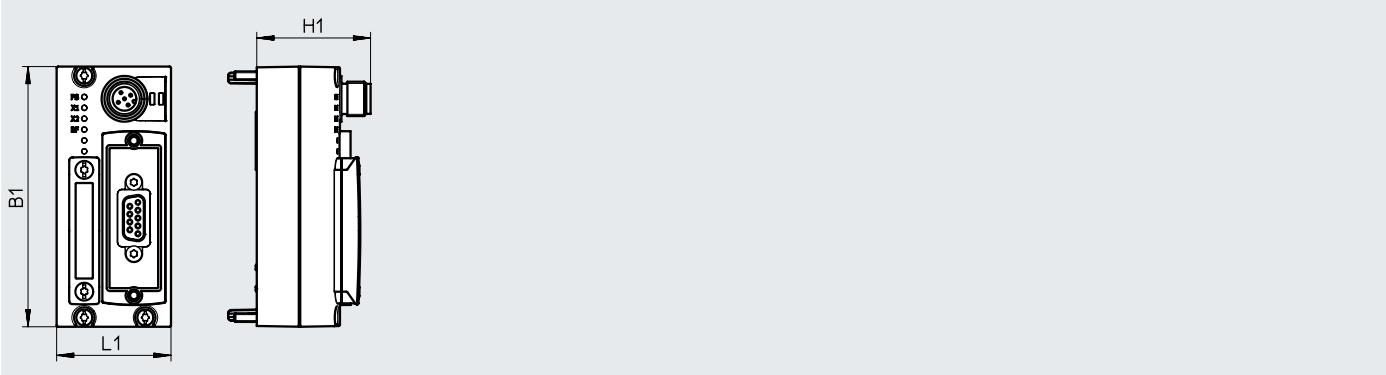
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

ATEX	
Type	CTEU-PB-EX1C
Certificate-issuing authority	UL E239998 SITIISAS CCC 202032230700686 NEPSI GYJ19.1188X KTL 24-KA4BO-0395X KTL 24-KA4BO-0394X KTL 24-KA4BO-0393X KTL 24-KA4BO-0392X IECEx IBE 19.0018 X IBExU16ATEXB021 X DNV 23.0350 X/00
Type of (ignition) protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA) EPL Ga (BR) EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR) Class III (US), (CA) Class II, Div. 2 (US), (CA) Class I, Div. 2 (US), (CA)
Explosion protection	Class I, Div. 2 (US), (CA) Class II, Div. 2 (US), (CA) Zone 0 (BR) Zone 2 (ATEX), (CA), (CN), (IEC-EX), (KR), (UKEX), (US) Zone 22 (ATEX), (BR), (CA), (CN), (IEC-EX), (KR), (UKEX), (US)

## Datasheet – CTEU-PB

## Dimensions







Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	L1
CTEU-PB	91	39.8	40

Pin allocation	Pin	Assignment	Description
<b>Sub-D, 9-pin, PROFIBUS interface</b>			
	1	Shielding	Functional earth
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data positive
	4	CNTR-P	Repeater control signal
	5	DGND	Data reference potential
	6	VP	Supply voltage positive (+ 5 V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data negative
	9	n.c.	Not connected
	Housing		Cable shielding, connection to functional earth FE
<b>Power supply, M12, A-coded</b>			
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	5	FE	Functional earth
<b>Bus connection M12 adapter (B-coded)</b>			
<b>Incoming</b> 	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)
<b>Outgoing</b> 	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)

Connection and display components	
	<ul style="list-style-type: none"> <li>[1] Status LED (operating status/diagnostics)</li> <li>[2] DIL switch</li> <li>[3] Power supply for bus node and connected devices (valve terminal)</li> <li>[4] Fieldbus interface (Sub-D socket)</li> </ul>

## Accessories – CTEU-PB

Ordering data – Bus node			Part no.	Type		
<b>Bus node</b>						
	PROFIBUS bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	<b>570040</b> CTEU-PB		
			–	<b>8107588</b> CTEU-PB-EX1C		
<b>Ordering data – Accessories for CTEU-PB</b>						
<b>Bus connection</b>						
	Sub-D plug, straight		<b>532216</b>	FBS-SUB-9-GS-DP-B		
	Sub-D plug, straight, with terminating resistor and programming interface		<b>574589</b>	NECU-S1W9-C2-APB		
	Sub-D plug, angled		<b>533780</b>	FBS-SUB-9-WS-PB-K		
	Bus connection M12 adapter, B-coded		<b>533118</b>	FBA-2-M12-5POL-RK		
	Straight socket, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK		<b>1067905</b>	NECU-M-B12G5-C2-PB		
	Straight plug, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK		<b>1066354</b>	NECU-M-S-B12G5-C2-PB		
	Terminating resistor, M12, B-coded for PROFIBUS		<b>1072128</b>	CACR-S-B12G5-220-PB		
<b>Fitting</b>						
	Threaded sleeve for Sub-D		<b>533000</b>	UNC4-40/M3X8		
<b>Plug socket</b>						
	For power supply, M12x1, 5-pin		<b>8162291</b>	NECB-M12G5-C2		
<b>User documentation</b>						
	User documentation – bus node CTEU-PB	German	<b>575392</b>	P.BE-CTEU-PB-OP+MAINT-DE		
		English	<b>575393</b>	P.BE-CTEU-PB-OP+MAINT-EN		
		Spanish	<b>575394</b>	P.BE-CTEU-PB-OP+MAINT-ES		
		French	<b>575395</b>	P.BE-CTEU-PB-OP+MAINT-FR		
		Italian	<b>575396</b>	P.BE-CTEU-PB-OP+MAINT-IT		
		Chinese	<b>575397</b>	P.BE-CTEU-PB-OP+MAINT-ZH		

## Accessories – CTEU-PB

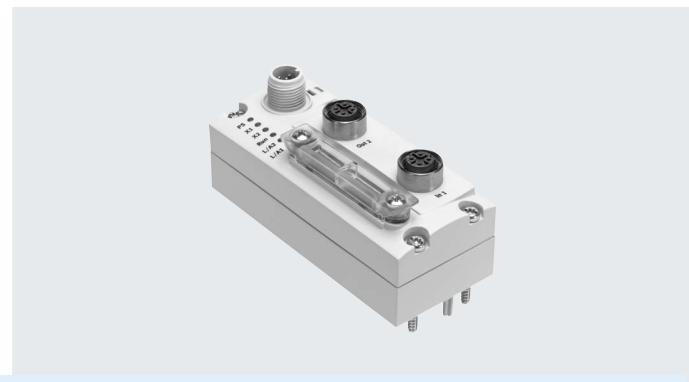
Ordering data – Accessories for CTEU-PB		Part no.	Type
<b>Inscription label holder</b>			
	5 frames with 40 pieces each	565306	ASLR-C-E4

## Datasheet – CTEU-EC



The bus node handles communication between the valve terminal and a higher-order master for EtherCAT®.

The module has basic diagnostic functions.  
It has 6 integrated status LEDs for on-site display.  
A maximum of 16 byte inputs and 16 byte outputs are transmitted in the cyclic process image.

**Application**

## Fieldbus connection

The bus connection is established via two M12 sockets, D-coded to IEC 61076-2-101 with degree of protection IP65/IP67.  
Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (cross-over and patch cables can be used)

that are brought together via an internal switch.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Please observe the applicable specifications such as the cable specifications for Ethernet networks ISO/IEC 11801 and ANSI/TIA/EIA-568-B.

- Maximum cable length (between network stations): 100 m
- Transmission rate: 100 Mbps
- EtherCAT® communication chip: ASIC ET1100

## EtherCAT® bus node

The EtherCAT® bus node supports the EtherCAT® protocol based on the Ethernet standard and TCP/IP technology to IEEE802.3.  
This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process equipment. In addition, non-real-time critical information such as diagnostic

information, configuration information, etc. can be transferred.  
The data bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.  
The bus node has a system and load supply, EtherCAT® input and output port, LEDs for status and diagnostic messages and DIL switches. Diagnostics

is possible directly at the bus node and/or via fieldbus.  
The bus node has separate operating and load voltage supplies.  
The bus node is mounted on an I-Port compatible device (e.g. valve terminal or electrical connection block) from Festo.

The bus node supplies voltage to downstream devices connected via the I-Port interface.  
The following can be set via DIL switch:
 

- Station addresses
- Diagnostics on/off
- Fail state behaviour

**General technical data****Fieldbus interface**

Protocol	EtherCAT®	
Function	Bus connection incoming/outgoing	
Transmission rate	[Mbps]	100
Type	Ethernet	
Connection type	2 x socket	
Connection technology	M12x1, D-coded to EN 61076-2-101	
Number of pins/cores	4	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
<b>Inputs/outputs</b>		
Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

## Datasheet – CTEU-EC

<b>General data</b>		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Activating diagnostics Fail-safe and idle response
Additional functions		Diagnostics object Acyclic data access via SDO Emergency message Modular device profile (MDP)
Configuration support		XML file
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	Run: Operating status (communication status) L/A2: Network active (connection status) port 2 (Out) L/A1: Network active (connection status) port 1 (In)
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 60
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-EC

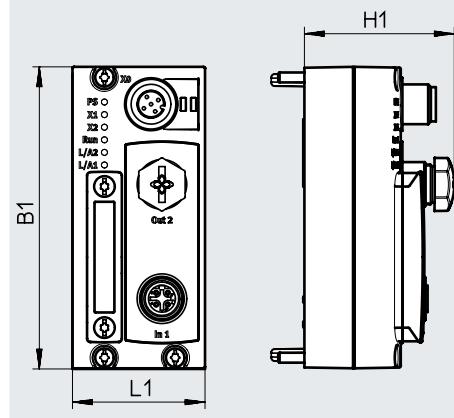
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.



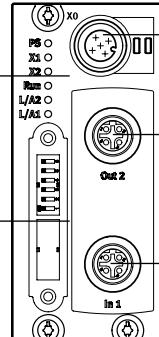
3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Dimensions





Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	L1
CTEU-EC	91	45.3	40

## Datasheet – CTEU-EC

Pin allocation	Pin	Assignment	Description
<b>EtherCAT® interface, M12, D-coded</b>			
	1	TX+	Transmitted data+
	2	RX+	Received data+
	3	TX-	Transmitted data-
	4	RX-	Received data-
	Housing		Cable shielding, connection to functional earth FE
<b>Power supply, M12, A-coded</b>			
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	5	FE	Functional earth
<b>Connection and display components</b>			
	[1]	Status LED (operating status/diagnostics)	
	[2]	DIL switch	
	[3]	Power supply for bus node and connected devices (valve terminal)	
	[4]	Fieldbus connection (M12 socket, D-coded)	

## Accessories – CTEU-EC

Ordering data			Part no.	Type		
<b>Bus node</b>						
	EtherCAT® bus node		572556	CTEU-EC		
<b>Plug for bus connection</b>						
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET		
<b>Connecting cable for bus connection</b>						
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446	NEBC-D12G4-ES-0.5-S-D12G4-ET	
			1 m	8040447	NEBC-D12G4-ES-1-S-D12G4-ET	
			3 m	8040448	NEBC-D12G4-ES-3-S-D12G4-ET	
			5 m	8040449	NEBC-D12G4-ES-5-S-D12G4-ET	
			10 m	8040450	NEBC-D12G4-ES-10-S-D12G4-ET	
	Straight plug, RJ45, 8-pin	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET		
		3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET		
		5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET		
		10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET		
		Open end, 4-core	5 m	8040456	NEBC-LE4-ES-5-D12G4-ET	
<b>Plug socket for power supply</b>						
	Socket M12x1, 5-pin		8162291	NECB-M12G5-C2		
<b>Connecting cable for power supply</b>						
	<ul style="list-style-type: none"> <li>• Socket M12x1, 5-pin</li> <li>• Plug M12x1, 5-pin</li> </ul>	Suitable for energy chains	5 m	574321	NEBU-M12G5-E-5-Q8N-M12G5	
			7.5 m	574322	NEBU-M12G5-E-7.5-Q8N-M12G5	
			10 m	574323	NEBU-M12G5-E-10-Q8N-M12G5	
			Standard	0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
					8003617	NEBU-M12G5-K-0.5-M12W5
	2 m	570734		NEBU-M12W5-K-2-M12W5		
		8003618		NEBU-M12G5-K-2-M12W5		
	<b>User documentation</b>					
		User documentation – bus node CTEU-EC	User documentation – bus node CTEU-EC	German	575400	P.BE-CTEU-EC-OP+MAINT-DE
				English	575401	P.BE-CTEU-EC-OP+MAINT-EN
			Spanish	575402	P.BE-CTEU-EC-OP+MAINT-ES	
			French	575403	P.BE-CTEU-EC-OP+MAINT-FR	
			Italian	575404	P.BE-CTEU-EC-OP+MAINT-IT	
			Chinese	575405	P.BE-CTEU-EC-OP+MAINT-ZH	

## Datasheet – CTEU-AS



The bus node handles communication between the valve terminal and a higher-order AS-Interface® master.

- Activation of up to 16 solenoid coils per valve terminal
- Automatic addressing
- Automatic detection of the number of connected valves

**Characteristics**

The module has a system and load supply, a bus connection and a connection to the valve terminal with serial I-Port interface.

The module has basic diagnostic functions. It has 3 integrated LEDs for on-site indication.

A maximum of 2 byte inputs and 2 byte outputs are transmitted in the cyclic process image.

**General technical data****Fieldbus interface 1**

Protocol	AS-Interface	
Function	Incoming bus connection Power supply	
Type	AS-Interface	
Connection type	Plug	
Connection technology	M12x1, A-coded to EN 61076-2-101	
Number of pins/cores	4	
Internal cycle time	[ms]	10

**Fieldbus interface 2**

Function	Outgoing bus connection Power supply	
Connection type	Socket	
Connection technology	M12x1, A-coded to EN 61076-2-101	
Number of pins/cores	4	

**Inputs/outputs**

Max. address volume inputs	[byte]	2
Max. address volume for outputs	[byte]	2

## Datasheet – CTEU-AS

General data		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Watchdog enable Watchdog disable
Additional functions		Emergency message Acyclic data access via SDO
Configuration support		None
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1
	Fieldbus-specific	AS-i: AS-Interface operation
Technical data – Electrics		
Nominal operating voltage	[V DC]	30
Operating voltage range	[V DC]	20 ... 31.6
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 50
Max. power supply	[A]	4
Technical data – Mechanical components		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	90 (without AS-i plug and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
Materials		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
Certification		c UL us - Listed (OL)
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

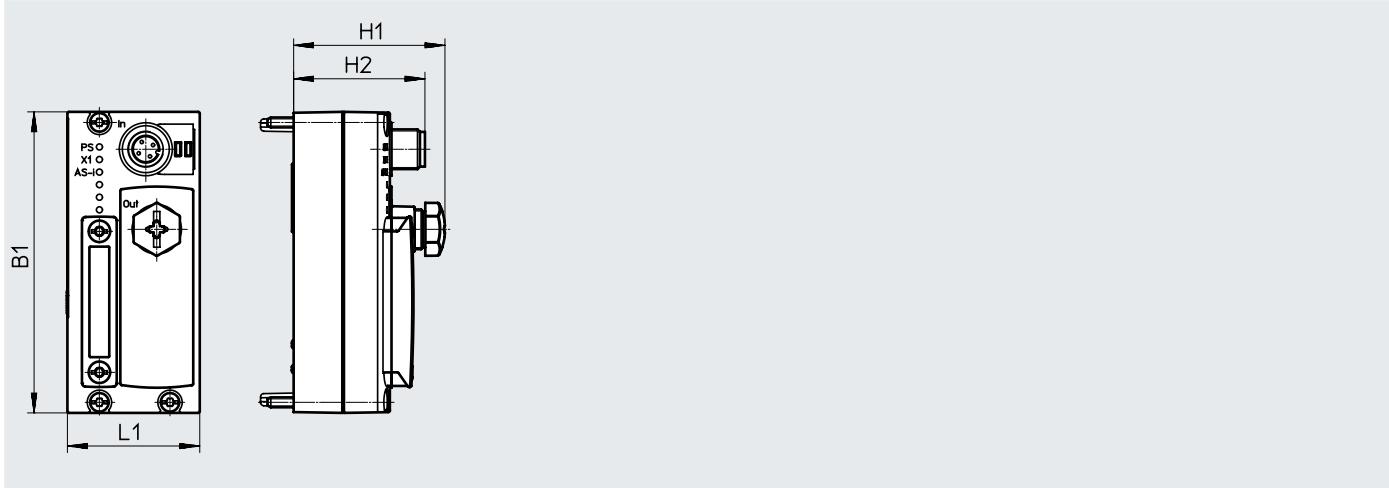
1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Datasheet – CTEU-AS

## Dimensions




Type	B1	H1	H2	L1
CTEU-AS	91	45.3	39.7	40

## Pin allocation


Pin	Assignment
-----	------------

## M12 plug, AS-interface In



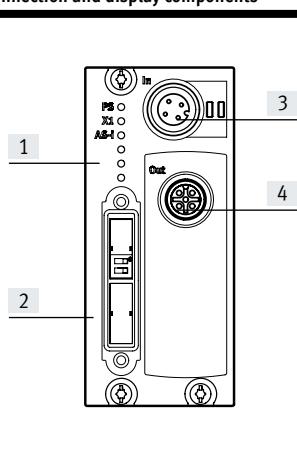
1	AS-Interface +
2	24 V load voltage supply
3	AS-Interface –
4	0 V load voltage supply

## M12 socket, AS-i Out





1	AS-Interface +
2	24 V load voltage supply
3	AS-Interface –
4	0 V load voltage supply

## Connection and display components



- [1] Status LED (operating status/diagnostics)
- [2] DIL switch
- [3] Plug M12, AS-Interface bus and auxiliary power supply (AS-i In)
- [4] M12 socket, AS-Interface bus and auxiliary power supply (AS-i Out)

## Accessories – CTEU-AS

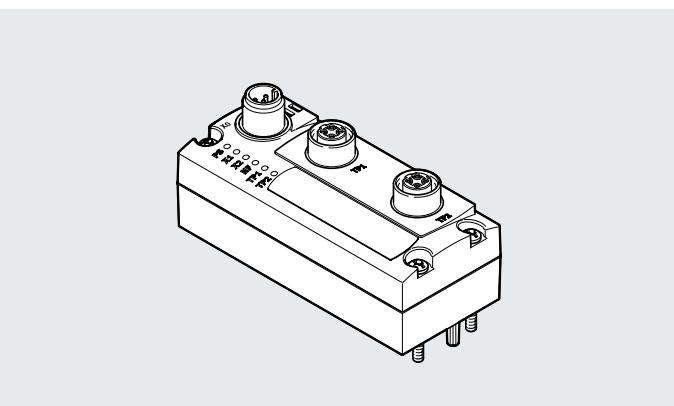
Ordering data		Part no.	Type
<b>Bus node</b>			
	AS-Interface bus node	572555	CTEU-AS
<b>Cable socket without load voltage supply</b>			
	Flat cable, screw terminal	18789	ASI-SD-PG-M12
<b>Flat cable</b>			
	AS-Interface flat cable	Yellow Black	18940 18941
	Cable sleeve for insulating and sealing the flat cable	165593	ASI-KT-FK
	Cable cap for insulating and sealing the flat cable	18787	ASI-KK-FK

## Datasheet – CTEU-PN



The bus node handles communication between the valve terminal and a higher-order PROFINET® master.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site indication. A maximum of 64 byte inputs and 64 byte outputs are transmitted in the cyclic process image.

**Application**

## Fieldbus connection

The bus connection is established via two sockets M12, D-coded to IEC 61076-2-101 with degree of protection IP65, IP67.

Both connections are equivalent 100BaseTX Ethernet ports (as per IEEE 802.3).

There is also an integrated switch function that enables free selection of the ports TP1/TP2 for PROFINET communication.

The voltage for the CTEU-PN bus node is supplied via an M12 plug, 5-pin, A-coded.

## I-Port interface

The bus node supports two interfaces for connecting I-Port devices.

When mounting the bus node on a valve terminal (direct integration), only one interface is used.

When using the bus node CTEU-PN on the electrical connection block CAPC (installation system CTEL),

both interfaces are available via the electrical connection block.

**General technical data****Fieldbus interface**

Protocol	PROFINET RT	
Function	Bus connection incoming/outgoing	
Transmission rate	[Mbps]	100
Type	Ethernet	
Connection type	2 x socket	
Connection technology	M12x1, D-coded to EN 61076-2-101	
Number of pins/cores	4	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	

**Inputs/outputs**

Max. address volume inputs	[byte]	64
Max. address volume for outputs	[byte]	64

## Datasheet – CTEU-PN

<b>General data</b>		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Additional functions		Conformance class C Fast start-up (FSU) LLDP MRP PROFINET IRT PROFenergy SNMP Shared device Webserver
Configuration support		GSDML file
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	NF: Network fault TP1: Network active port 1 TP2: Network active port 2
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 80
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting		On electrical connection block On electrical interface
Product weight	[g]	93
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet – CTEU-PN

Operating and environmental conditions		CTEU-PN	CTEU-PN-EX1C
Type			
Ambient temperature	[°C]	-5 ... +50	-5 ... +50
Storage temperature	[°C]	-20 ... +70	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2	2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive	To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations	To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC	–
Certification		c UL us - Listed (OL) RCM	c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67	IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed	In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

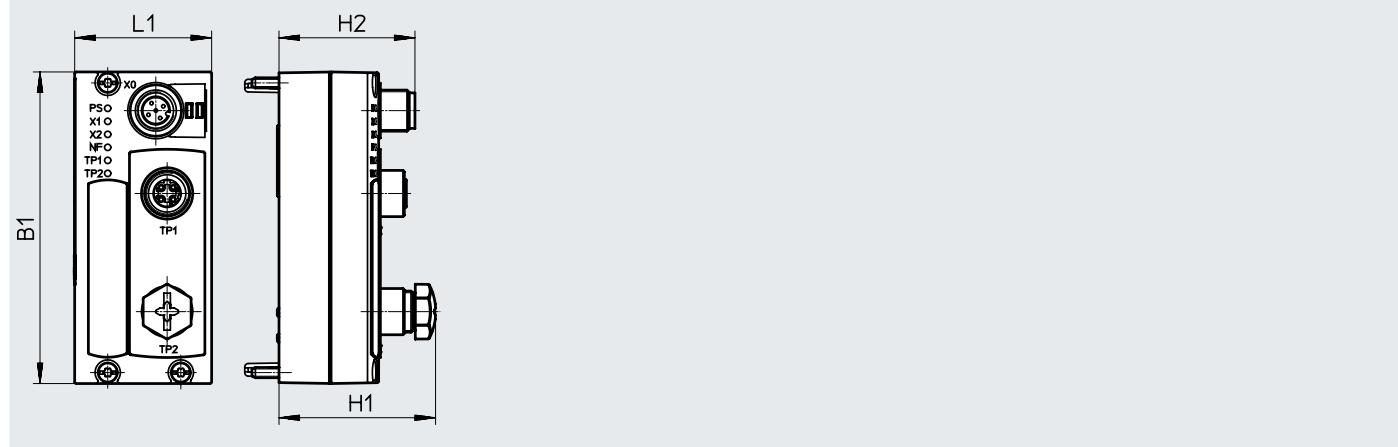
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

ATEX	
Type	CTEU-PN-EX1C
Certificate-issuing authority	UL E239998 SITIIS CCC 202032230700686 NEPSI GY19.1188X KTL 24-KA4BO-0395X KTL 24-KA4BO-0394X KTL 24-KA4BO-0393X KTL 24-KA4BO-0392X IECEx IBE 19.0018 X IBExU16ATEXB021 X DNV 23.0350 X/00
Type of (ignition) protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA) EPL Ga (BR) EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR) Class III (US), (CA) Class II, Div. 2 (US), (CA) Class I, Div. 2 (US), (CA)

## Datasheet – CTEU-PN

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	H2	L1
CTEU-PN	91	45.7	39.7	40

## Pin allocation


Pin	Assignment	Description
-----	------------	-------------

## PROFINET interface, M12 socket, 4-pin, D-coded



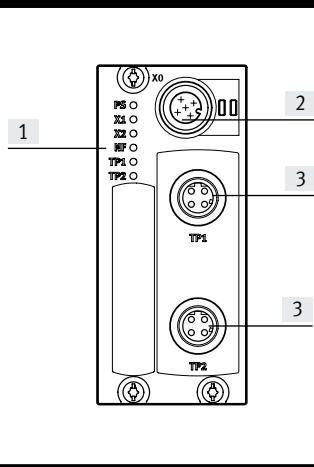
1	TX+	Differential transmitter cable, positive signal
2	RX+	Differential receiver cable, positive signal
3	TX-	Differential transmitter cable, negative signal
4	RX-	Differential receiver cable, negative signal
Housing		Functional earth

## Power supply, M12 plug, 5-pin, A-coded




1	24V <sub>EL/SEN</sub>	Operating voltage supply (internal electronics, I-Port devices)
2	24V <sub>VAL/OUT</sub>	Load voltage supply (I-Port devices)
3	0V <sub>EL/SEN</sub>	Operating voltage supply (internal electronics, I-Port devices)
4	0V <sub>VAL/OUT</sub>	Load voltage supply (I-Port devices)
5	FE	Functional earth



## Connection and display components



- [1] Status LED (operating status/diagnostics)
- [2] Power supply for bus node and connected devices (valve terminal)
- [3] Fieldbus connection

## Accessories CTEU-PN

Ordering data – Bus node			Part no.	Type
Bus node				
	PROFINET bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	2201471 CTEU-PN
			–	8107589 CTEU-PN-EX1C

Ordering data – Accessories for CTEU-PN			Part no.	Type
Plug for bus connection				
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET
Connecting cable for bus connection				
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446 NEBC-D12G4-ES-0.5-S-D12G4-ET
			1 m	8040447 NEBC-D12G4-ES-1-S-D12G4-ET
			3 m	8040448 NEBC-D12G4-ES-3-S-D12G4-ET
			5 m	8040449 NEBC-D12G4-ES-5-S-D12G4-ET
			10 m	8040450 NEBC-D12G4-ES-10-S-D12G4-ET
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	1 m	8040451 NEBC-D12G4-ES-1-S-R3G4-ET
			3 m	8040452 NEBC-D12G4-ES-3-S-R3G4-ET
			5 m	8040453 NEBC-D12G4-ES-5-S-R3G4-ET
			10 m	8040454 NEBC-D12G4-ES-10-S-R3G4-ET
	Open end, 4-core		5 m	8040456 NEBC-LE4-ES-5-D12G4-ET
Plug socket for power supply				
	Socket M12x1, 5-pin		8162291	NECB-M12G5-C2
Connecting cable for power supply				
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains	5 m	574321 NEBU-M12G5-E-5-Q8N-M12G5
			7.5 m	574322 NEBU-M12G5-E-7.5-Q8N-M12G5
			10 m	574323 NEBU-M12G5-E-10-Q8N-M12G5
			0.5 m	570733 NEBU-M12W5-K-0.5-M12W5
	Standard		8003617	NEBU-M12G5-K-0.5-M12W5
			2 m	570734 NEBU-M12W5-K-2-M12W5
			8003618	NEBU-M12G5-K-2-M12W5

## Datasheet – CTEU-EP

**EtherNet/IP**

The bus node handles communication between the valve terminal and a higher-order master via Ethernet.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site display. A maximum of 64 byte inputs and 64 byte outputs are transmitted in the cyclic process image

**Application**

The bus node CTEU-EP is a module within the CTEU series which can be used to connect I-Port devices with

specification V1.0 to an EtherNet/IP or Modbus/TCP bus.

Depending on the installation, the bus

node provides two I-Port interfaces for the connection of I-Port devices.

**Installation**

## Direct integration

- Mounting the bus node on an I-Port device, e.g. valve terminal
- One I-Port interface available (for internal communication)

## Adapter CAPC

- Mounting the bus node on the adapter
- Two I-Port interfaces available on the adapter

## Power supply

The power is supplied to the bus node and the connected I-Port devices via an M12 plug, 5-pin, A-coded, on the top side of the housing.

## Ethernet connection

The bus node CTEU-EP provides two 100BASE-TX Ethernet interfaces (as per IEEE802.3) that are electrically isolated from the rest of the internal electronics. The integrated switch function differentiates automatically between the incoming and outgoing Ethernet connection, regardless of the network connection used.

**General technical data****Fieldbus interface**

Protocol	EtherNet/IP Modbus TCP	
Transmission rate	[Mbps]	11 0/100
Fieldbus interface	2x socket, M12x1, 4-pin, D-coded	
Internal cycle time	1 ms per 1 byte of user data	

**Inputs/outputs**

Max. address volume inputs	[byte]	64
Max. address volume for outputs	[byte]	64

**Technical data – Electrics**

Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4

## Datasheet – CTEU-EP

General data		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Diagnostic behaviour Fail-safe and idle response
Additional functions		AddressConflictDetection (ACD) Acyclic data access via "Explicit Message" EtherNet/IP Quickconnect IP Addressing via DHCP, DIL switch, fieldbus or FFT Integrated switch Ring topology (DLR) SNMP Start-up parameterisation in plain text via fieldbus System status can be displayed using process data Webserver
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	TP1: Network active port 1 TP2: Network active port 2 NS: Network status
Technical data – Mechanical components		
Product weight	[g]	98
Dimensions W x L x H	[mm]	40 x 91 x 50
Materials		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III
Operating and environmental conditions		
Type	CTEU-EP	CTEU-EP-EX1C
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking	KC EMC	–
Certification	c UL us - Listed (OL) RCM	c UL us - Listed (OL) RCM
Degree of protection	IP65/IP67	IP65/IP67

<sup>1)</sup> More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)<sup>2)</sup> For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

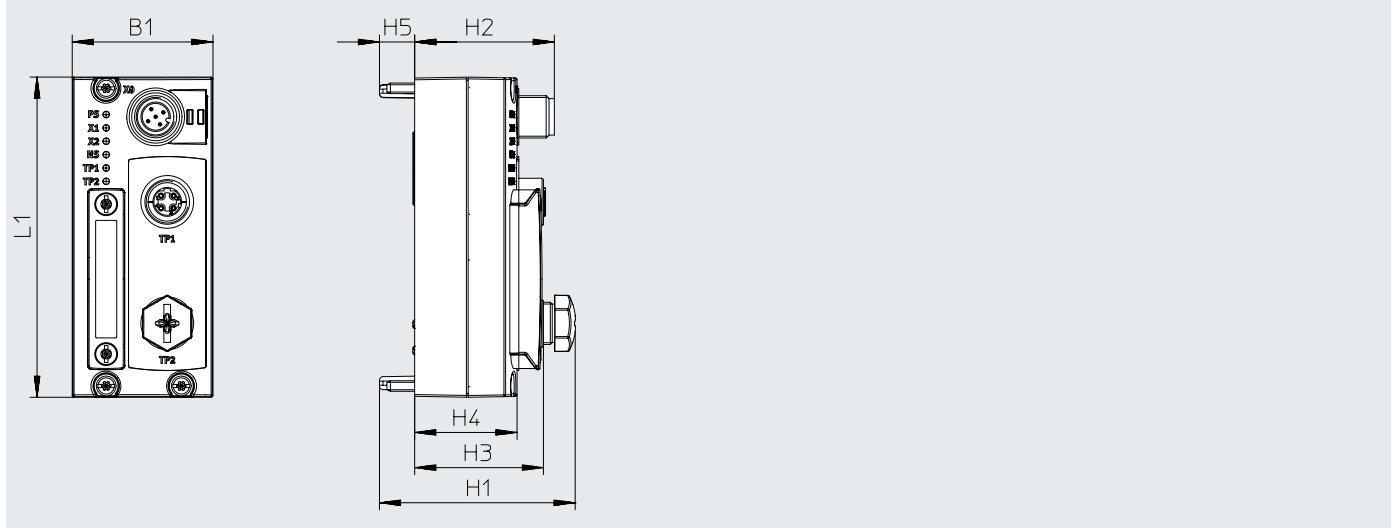
<sup>3)</sup> More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Datasheet – CTEU-EP

<b>ATEX</b>	
Type	CTEU-EP-EX1C
Certificate-issuing authority	UL E239998 SITIIS CCC 202032230700686 NEPSI GYJ19.1188X KTL 24-KA4BO-0395X KTL 24-KA4BO-0394X KTL 24-KA4BO-0393X KTL 24-KA4BO-0392X IECEx IBE 19.0018 X IBExU16ATEXB021 X DNV 23.0350 X/00
Type of (ignition) protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA) EPL Ga (BR) EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR) Class III (US), (CA) Class II, Div. 2 (US), (CA) Class I, Div. 2 (US), (CA)

## Datasheet – CTEU-EP

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

Type	L1	H1	H2	H3	H4	H5	B1
CTEU-EP	91	55.6	39.7	36.6	29.1	10	40

## Pin allocation


Pin	Assignment	Description
-----	------------	-------------

## Ethernet interface, socket M12, 4-pin, D-coded



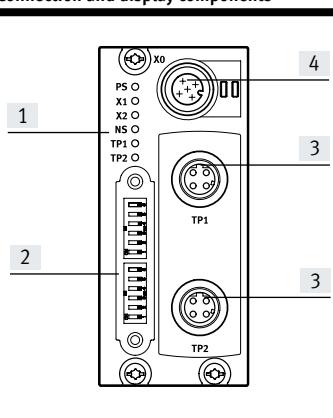
1	TX+	Differential transmitter cable, positive signal
2	RX+	Differential receiver cable, positive signal
3	TX-	Differential transmitter cable, negative signal
4	RX-	Differential receiver cable, negative signal
Housing		Functional earth

## Power supply, M12, A-coded






1	24V <sub>El/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
3	0V <sub>El/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
4	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
5	FE	Functional earth

## Connection and display components



- [1] Status LED (operating status/diagnostics)
- [2] DIL switch
- [3] Network connections (network ports TP1/TP2, fieldbus interface)
- [4] Power supply connection

## Accessories – CTEU-EP


Ordering data			Part no.	Type	
<b>Bus node</b>					
	EP bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	2798071 <b>CTEU-EP</b>	
			-	8107591 CTEU-EP-EX1C	
<b>Plug for bus connection</b>					
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET	
<b>Connecting cable for bus connection</b>					
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446 NEBC-D12G4-ES-0.5-S-D12G4-ET	
			1 m	8040447 NEBC-D12G4-ES-1-S-D12G4-ET	
			3 m	8040448 NEBC-D12G4-ES-3-S-D12G4-ET	
			5 m	8040449 NEBC-D12G4-ES-5-S-D12G4-ET	
			10 m	8040450 NEBC-D12G4-ES-10-S-D12G4-ET	
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	1 m	8040451 NEBC-D12G4-ES-1-S-R3G4-ET	
			3 m	8040452 NEBC-D12G4-ES-3-S-R3G4-ET	
			5 m	8040453 NEBC-D12G4-ES-5-S-R3G4-ET	
			10 m	8040454 NEBC-D12G4-ES-10-S-R3G4-ET	
	Open end, 4-core		5 m	8040456 NEBC-LE4-ES-5-D12G4-ET	
<b>Plug socket for power supply</b>					
	Socket M12x1, 5-pin		8162291	NECB-M12G5-C2	
<b>Connecting cable for power supply</b>					
	<ul style="list-style-type: none"> <li>• Socket M12x1, 5-pin</li> <li>• Plug M12x1, 5-pin</li> </ul>	Suitable for energy chains	5 m	574321 NEBU-M12G5-E-5-Q8N-M12G5	
			7.5 m	574322 NEBU-M12G5-E-7.5-Q8N-M12G5	
			10 m	574323 NEBU-M12G5-E-10-Q8N-M12G5	
			0.5 m	570733 NEBU-M12W5-K-0.5-M12W5	
	Standard			8003617 NEBU-M12G5-K-0.5-M12W5	
				570734 NEBU-M12W5-K-2-M12W5	
				8003618 NEBU-M12G5-K-2-M12W5	

## Datasheet CTEU-VN



The bus node handles communication between the valve terminal and a higher-order master for VARAN.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. Up to 32 byte inputs and 32 byte outputs are typically transmitted in the cyclic process image.

**Application**

## Bus connection

The bus node provides two VARAN interfaces in line with IEEE802.3 that are galvanically isolated from the rest of the internal electronics.

The Ethernet cables are connected via a 4-pin, D-coded M12 socket.

The metal M12 push-in connectors of the ports on the bus node are connected directly to FE.

The connections are marked as IN XF1 and OUT XF2.

**Type of installation**

Direct integration:

In the case of direct mounting on an I-Port device, only one I-Port can be used. The connection with the device is established via a 5-pin, A-coded M12 socket.

Decentralised installation of CTEL system with adapter CAPC:

If the bus node is used on an adapter CAPC, the electrical connection

of both I-Ports is established via an 8-pin socket strip.

**General technical data****Fieldbus interface**

Protocol	VARAN	
Transmission rate	[Mbps]	100
Type	Ethernet	
Connection type	2 x socket	
Connection technology	M12x1, D-coded to EN 61076-2-101	
Number of pins/cores	4	
Galvanic isolation	Yes	
Internal cycle time	1 ms per 1 byte of user data	
Function	Bus connection incoming/outgoing	

**Inputs/outputs**

Max. address volume inputs	[byte]	32
Max. address volume for outputs	[byte]	32

## Datasheet CTEU-VN

<b>General data</b>		
Diagnostics	System diagnostics	
	Undervoltage	
	Communication error	
Parameterisation	IO-Link® mode	
	Fail-safe response	
	FFT	
Additional functions	VARAN splitter	
	LASAL module	
Configuration support		
LED indicator	PS: Operating voltage for electronics and load supply	
	X1: System status of module at I-Port 1	
	X2: System status of module at I-Port 2	
	XF1 AC: network data exchange, port 1	
	XF1 Li: network active, port 1	
<b>Technical data – Electrics</b>		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4
<b>Power supply</b>		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5
<b>Technical data – Mechanical components</b>		
Type of mounting	On electrical connection block	
	On electrical interface	
Product weight	[g]	98
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50
<b>Materials</b>		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III

## Datasheet CTEU-VN

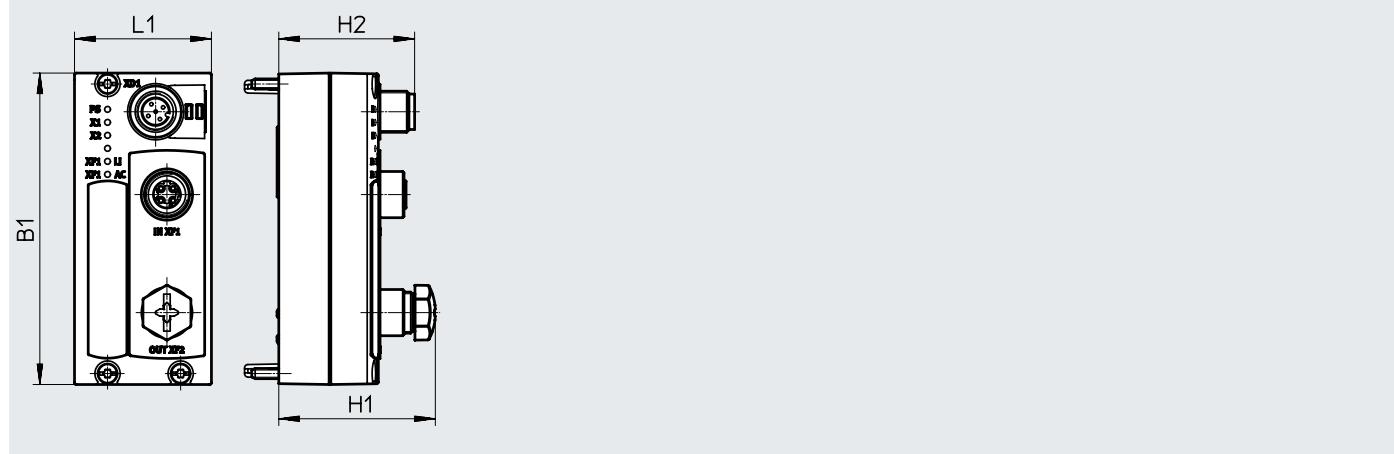
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state Unused connections sealed

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.



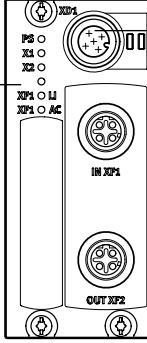
3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

## Dimensions





Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	H1	H2	L1
CTEU-VN	91	45.7	39.7	40

## Datasheet CTEU-VN

Pin allocation	Pin	Assignment	Description
Ethernet interface, socket, M12, 4-pin	IN XF1	OUT XF2	
<b>Ethernet interface, socket, M12, 4-pin</b>			
	1	2	TX+
	2	1	RX+
	3	4	TX-
	4	3	RX-
<b>Power supply, M12 plug, A-coded</b>			
	1	-	24V <sub>EL/SEN</sub>
	2	-	24V <sub>VAL/OUT</sub>
	3	-	0V <sub>EL/SEN</sub>
	4	-	0V <sub>VAL/OUT</sub>
	5	-	FE
<b>Connection and display components</b>			
	[1]	Status LED (operating status/diagnostics)	
	[2]	Power supply	
	[3]	Bus interface incoming IN XF1/outgoing OUT XF2	

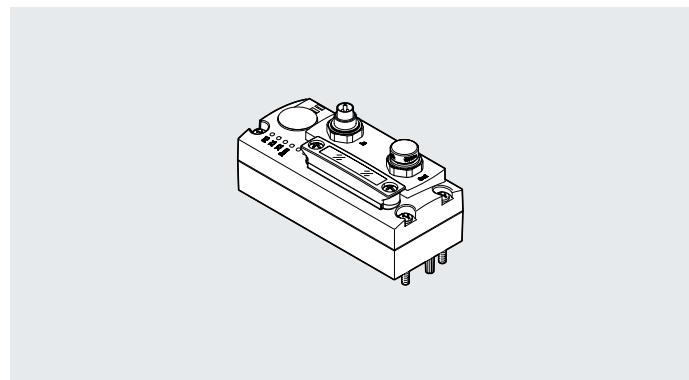
## Accessories CTEU-VN

Ordering data		Part no.	Type		
<b>Bus node</b>					
	VARAN bus node	8087559	CTEU-VN		
<b>Plug for bus connection</b>					
	Plug M12x1, 4-pin, D-coded	543109	NECU-M-S-D12G4-C2-ET		
<b>Connecting cable for bus connection</b>					
	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446	NEBC-D12G4-ES-0.5-S-D12G4-ET	
		1 m	8040447	NEBC-D12G4-ES-1-S-D12G4-ET	
		3 m	8040448	NEBC-D12G4-ES-3-S-D12G4-ET	
		5 m	8040449	NEBC-D12G4-ES-5-S-D12G4-ET	
		10 m	8040450	NEBC-D12G4-ES-10-S-D12G4-ET	
	Straight plug, RJ45, 8-pin	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET	
		3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET	
		5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET	
		10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET	
	Open end, 4-core	5 m	8040456	NEBC-LE4-ES-5-D12G4-ET	
<b>Plug for power supply</b>					
	Socket M12x1, 5-pin	8162291	NECB-M12G5-C2		
<b>Connecting cable for power supply</b>					
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains, straight socket	5 m	574321	NEBU-M12G5-E-5-Q8N-M12G5
			7.5 m	574322	NEBU-M12G5-E-7.5-Q8N-M12G5
			10 m	574323	NEBU-M12G5-E-10-Q8N-M12G5
			0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
	Standard, angled socket		8003617	NEBU-M12G5-K-0.5-M12W5	
			2 m	570734	NEBU-M12W5-K-2-M12W5
				8003618	NEBU-M12G5-K-2-M12W5
<b>Cover cap</b>					
	For plugging female threads M12x1	165592	ISK-M12		
<b>Inscription label holder</b>					
	5 frames with 40 pieces each	565306	ASLR-C-E4		

## Datasheet – CTEU-CP

The bus node handles communication between the valve terminal and a higher-order CPI master.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site display. A maximum of 4 byte inputs and 4 byte outputs are transmitted in the cyclic process image.



### Application

The bus node CTEU-CP provides two CPI interfaces.

The connections are marked as IN and OUT.

### Installation

#### Direct integration

- Mounting the bus node on an I-Port device, e.g. valve terminal
- One I-Port interface available (for internal communication)
- In this case, the connection with the device is established via a 5-pin, A-coded M12 flange socket.

#### Adapter CAPC

- Mounting the bus node on the adapter
- Two I-Port interfaces available on the adapter
- If the bus node is used on an adapter CAPC, the two I-Ports are connected electrically via an 8-pin socket strip.

#### Power supply

The power is supplied to the bus node and the connected I-Port devices via an M9 plug, 5-pin (In) and an M9 socket, 5-pin (Out) on the top side of the housing.

Both the plug and the socket have a metal thread.

### General technical data

#### Fieldbus interface

Protocol	CPI-B CP installation system	
Transmission rate	[Mbps]	100
Fieldbus interface	Socket, M9x0.5, 5-pin	
Internal cycle time	2 ms per 2 byte of user data	

#### Inputs/outputs

Max. address volume inputs	[byte]	4
Max. address volume for outputs	[byte]	4

#### Technical data – Electrics

Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 50
Max. power supply	[A]	3.4

## Datasheet – CTEU-CP

General data		
Device-specific diagnostics		System diagnostics Undervoltage Communication error
Parameterisation		Diagnostic behaviour Fail-safe response
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply X1: System status of module at I-Port 1 X2: System status of module at I-Port 2
	Fieldbus-specific	RUN: Communication OK
Technical data – Mechanical components		
Product weight	[g]	105
Dimensions W x L x H	[mm]	40 x 91 x 50
Materials		
Housing		PA
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-Zone III
Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations <sup>2)</sup> To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL) RCM
Degree of protection		IP65/IP67

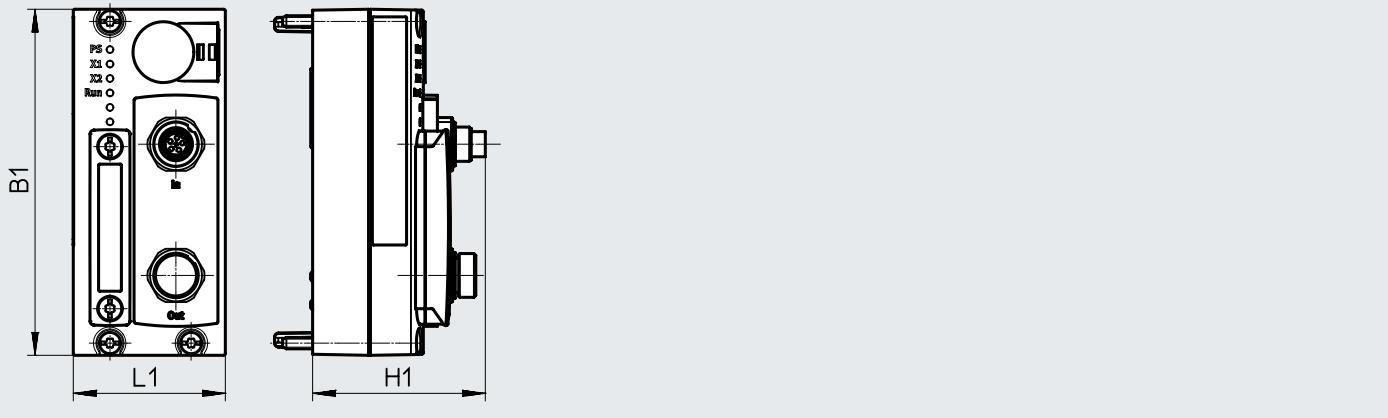
1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

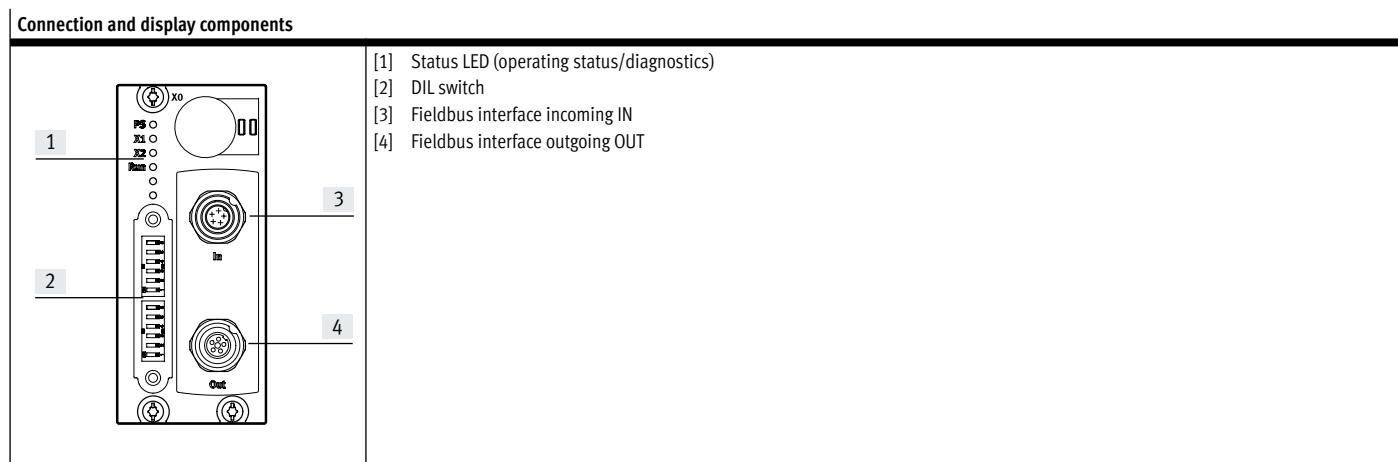
## Datasheet – CTEU-CP

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

Type	L1	H1	B1
CTEU-CP	40	45.4	91

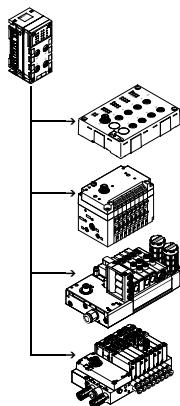
Pin allocation	Pin	Assignment	Description
<b>Fieldbus interface M9, 5-pin</b>			
Incoming	1	24V <sub>EL/SEN</sub>	24 V DC operating voltage supply (PS) internal electronics and I-Port devices
	2	24V <sub>VAL/OUT</sub>	24 V DC load voltage supply (PL) I-Port devices
	3	0V <sub>EL/SEN</sub>	0 V operating voltage supply and load voltage supply
	4	CAN+	Received/transmitted data high
	5	CAN-	Received/transmitted data low
	Thread	FE	Functional earth/shielding
Outgoing	1	24V <sub>EL/SEN</sub>	24 V DC operating voltage supply (PS) internal electronics and I-Port devices
	2	24V <sub>VAL/OUT</sub>	24 V DC load voltage supply (PL) I-Port devices
	3	0V <sub>EL/SEN</sub>	0 V operating voltage supply and load voltage supply
	4	CAN+	Received/transmitted data high
	5	CAN-	Received/transmitted data low
	Thread	FE	Functional earth/shielding



## Accessories – CTEU-CP

Ordering data		Part no.	Type
<b>Bus node</b>			
	Bus node CTEU-CP	For installation system CPI	<b>2149714</b> <b>CTEU-CP</b>

## Datasheet – Interface CPX-CTEL



The electrical interface CPX CTEL master establishes the connection to modules of the CTEL/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX bus node and thus to the higher-order controller via fieldbus. A maximum of 4 devices can be connected to a CPX CTEL master via corresponding M12 interfaces.



### Application

#### I-Port interface

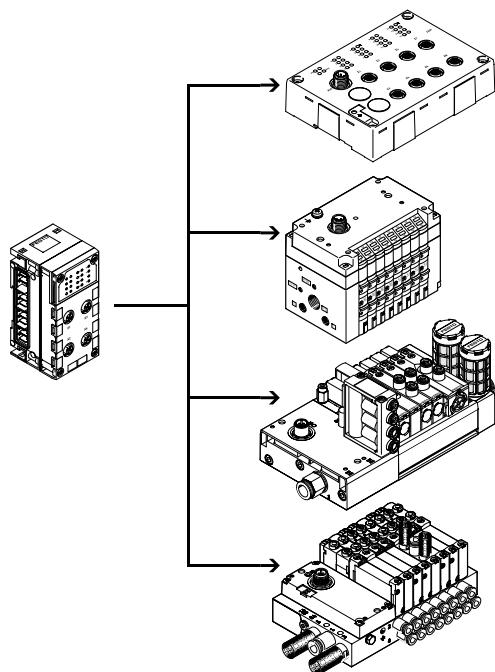
As well as transmitting the communication data, the I-Port interfaces of a CPX CTEL master also transmit the power supply to the connected sensors

and the load supply to the valves (or outputs).

Both circuits are supplied separately with 24 V, using a separate ground.

The connecting cables used must meet the increased requirements resulting from the dual function as signal cable and supply cable.

#### Configuration example – CPX CTEL master with CTEL modules



The CPX CTEL master provides 4 external I-Port interfaces, each of which can be connected with a device. I-Port is an interface for exchanging serial data for connecting decentralised modules or valve terminals from Festo. The I-Port interface is based on IO-Link® and is compatible with it in certain areas. The connection type corresponds to a star topology. In other words, only one module or one valve terminal can be connected to each I-Port.

The restrictions compared to IO-Link® include:

- Permanently set baud rate of 230.4 kbps
- SIO mode is not supported
- Max. 32 bytes of input data and 32 bytes of output data
- Only one extract of the master commands is used
- Festo plug & work principle, configuration via IODD is not supported.

## Datasheet – Interface CPX-CTEL

**Implementation**

The CPX CTEL master from Festo enables modules with an I-Port interface to be connected to a CPX system:	The following device variants are available: <ul style="list-style-type: none"> <li>• Input modules with 16 digital inputs (connection technology M8 3-pin and M12 5-pin)</li> <li>• Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)</li> </ul>	The decentralised layout of the modules and valve terminals with I-Port enables them to be mounted close to the cylinders and actuators or sensors to be controlled. This means that the compressed air supply lines and sensor cables used can be shortened, and it may be possible to use smaller valves, thereby saving costs.	Several CPX CTEL masters can be combined in one CPX terminal, depending on the address capacity of the bus node. Example: <ul style="list-style-type: none"> <li>• CPX-FB13 (512 I/O)</li> <li>• The maximum number of CPX CTEL masters is 2 (each with 256 I/O)</li> </ul>
--	--	---	---

**Configuration**

Settings	Manual configuration	Automatic configuration
The precise number of the I/O bytes made available depends on the requirements of the connected devices or of the relevant selected operating mode. The operating mode or preset configuration of the CPX CTEL master can be specified by the user.  Selecting the operating mode and setting the manual configuration takes place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.	In the case of manual configuration (tool change mode), the volume of inputs and outputs in the process image of the CPX system or of the higher-level fieldbus can be defined manually using the DIL switches.	The process image then always has the same scope, regardless of the connected devices.  The specified I/O length always applies to all four I-Ports (max. 8 bytes per I-Port).

**Power supply for I-Port devices**

The CPX-CTEL master provides two separate power supplies for the connected devices:	<ul style="list-style-type: none"> <li>• For the outputs and valves that are connected to the device</li> </ul> <p>The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX terminal.</p>	<p>The power supply for the outputs and valves is provided by the power supply for the valves of the CPX terminal. The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This</p>	means it is possible to disconnect this supply voltage separately. The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.
---	---	---	---

## Datasheet – Interface CPX-CTEL

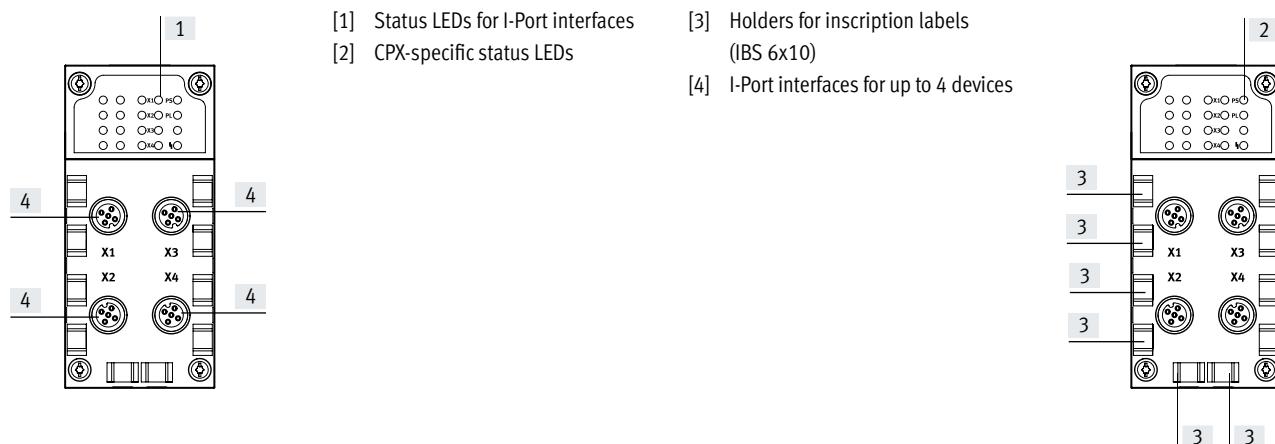
General technical data		
Type	CPX-CTEL-4-M12-5POL	
Protocol	I-Port	
Maximum address capacity	Outputs [bit]	256
	Inputs [bit]	256
I-Port connection	4x socket M12, 5-pin, A-coded	
Number of I-Port interfaces	4	
Maximum cable length	[m]	20
Internal cycle time	[ms]	1 per 8 bits of user data
Galvanic isolation	Channel – channel	No
	Channel – internal bus	Yes, with intermediate air supply
LED indicators	X1 ... 4 = Status of the I-Port interface 1 ... 4 PS = Electronic supply PL = Load supply -  - = Module error	
Diagnostics	<ul style="list-style-type: none"> <li>• Communication error</li> <li>• Module short circuit</li> <li>• Module-oriented diagnostics</li> <li>• Undervoltage</li> </ul>	
Parameterisation	<ul style="list-style-type: none"> <li>• Diagnostic behaviour</li> <li>• Fail-safe per channel</li> <li>• Forcing per channel</li> <li>• Idle mode per channel</li> <li>• Module parameters</li> <li>• Tool change mode</li> </ul>	
Additional functions	Tool change mode	
Control elements	DIL switches	
Operating voltage	Nominal width [V DC]	24 (reverse polarity protected)
	Permissible range [V DC]	18 ... 30
	Power failure buffering [ms]	10
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply per channel	[A]	4x 1.6
Max. residual current of outputs per channel	[A]	4x 1.6
Degree of protection to EN 60529	IP65/IP67	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Reinforced PA, PC	
Note on materials	RoHS-compliant	
Grid dimension	[mm]	50
Dimensions (including interlinking block) W x L x H	[mm]	50 x 107 x 55
Product weight	[g]	110

 Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

## Datasheet – Interface CPX-CTEL

### Connection and display components

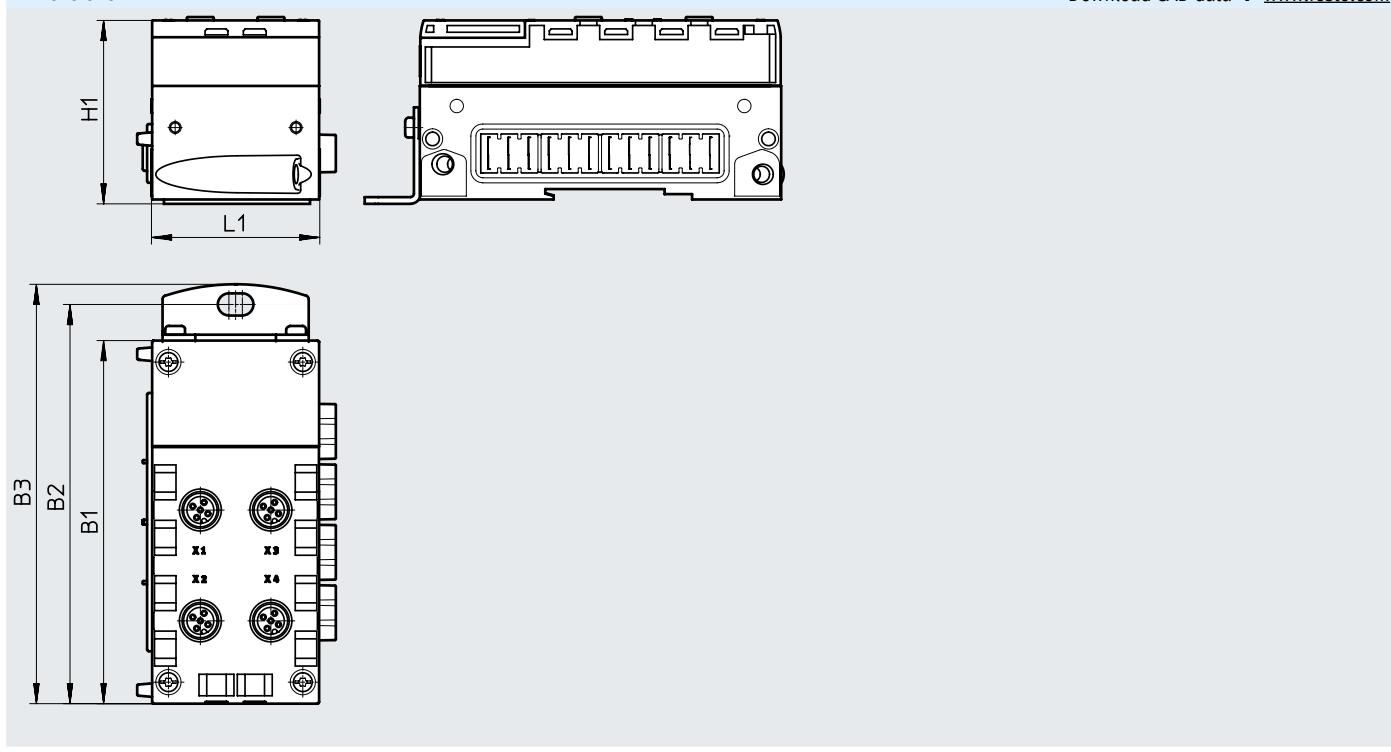


### Pin assignment – I-Port interface/IO-Link®

	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)




### Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

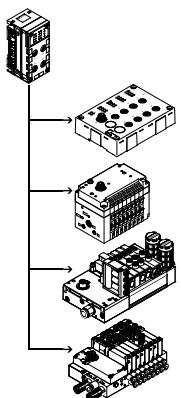


Type	B1	B2	B3	H1	L1
CPX-CTEL-4-M12-5POL	108.1	118.9	124.9	55.1	50

## Accessories – Interface CPX-CTEL

Ordering data		Part no.	Type		
Designation					
<b>CPX CTEL master</b>					
	Interface for a maximum of 4 I/O modules and valve terminals with I-Port interface (devices)	1577012	CPX-CTEL-4-M12-5POL		
<b>Bus connection</b>					
	Cover cap M12	165592	ISK-M12		
	Inscription label holder for connection block	536593	CPX-ST-1		
<b>Connecting cable</b>					
	Straight – angled	Suitable for energy chains	5 m	574321	NEBU-M12G5-E-5-Q8N-M12G5
	Angled – angled	7.5 m	574322	NEBU-M12G5-E-7.5-Q8N-M12G5	
	Straight – angled	10 m	574323	NEBU-M12G5-E-10-Q8N-M12G5	
	Angled – angled	Standard	0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
	Straight – angled		2 m	8003617	NEBU-M12G5-K-0.5-M12W5
		2 m	570734	NEBU-M12W5-K-2-M12W5	
		2 m	8003618	NEBU-M12G5-K-2-M12W5	
<b>User documentation</b>					
	User documentation for CPX CTEL master	German	574600	P.BE-CPX-CTEL-DE	
		English	574601	P.BE-CPX-CTEL-EN	
		Spanish	574602	P.BE-CPX-CTEL-ES	
		French	574603	P.BE-CPX-CTEL-FR	
		Italian	574604	P.BE-CPX-CTEL-IT	

## Datasheet – Interface CPX-CTEL-2



The electrical interface CPX CTEL master establishes the connection to modules of the CTEL/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX bus node and thus to the higher-order controller via fieldbus.  
A maximum of two IO-Link devices can be connected to an electrical interface CPX-CTEL-2... via the corresponding M12 interfaces.

**Application**

## IO-Link® interface

The communication system IO-Link® is used to exchange serial data from decentralised function modules (devices) at the field level.

The electrical interface CPX-CTEL-2... provides two external IO-Link® inter-

faces, each of which can be connected to a device.  
The connection type corresponds to a star topology, which means that only one device can be connected to each port.

The address space that the module makes available and assigns accordingly in the CPX system can be configured according to various presets.  
Selecting the operating mode and setting the manual configuration takes

place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.

**Constraints**

The interfaces (ports) of electrical interface CPX-CTEL-2... support the connection of IO-Link® devices with few limitations.

- The process data length of the inputs and outputs is limited to 16 bytes each per port

- The driver strength on the C/Q line is limited to 250 mA

- SIO mode is not supported

The electrical interface CPX-CTEL-2... provides two separate power supplies for the connected devices:

- For operating the device and the inputs connected to it

- For the outputs and valves that are connected to the device  
The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX terminal.

The power supply for the outputs and valves is provided by the power supply for the valves of the CPX terminal.  
The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This

means it is possible to disconnect this supply voltage separately.  
The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.

## Datasheet – Interface CPX-CTEL-2

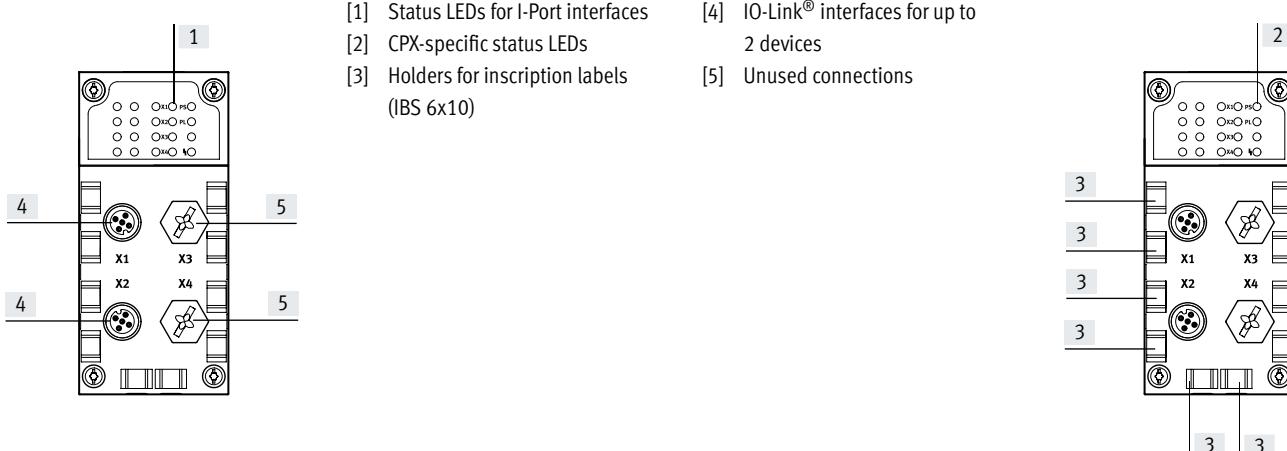
General technical data		
Type	CPX-CTEL-2-M12-5POL-LK	
Protocol	IO-Link®, master version V 1.0	
Maximum address volume	Outputs [bit]	256
	Inputs [bit]	256
I-Port connection		2x socket M12, 5-pin, A-coded
Number of IO-Link® interfaces		2
Maximum cable length	[m]	20
Internal cycle time	[ms]	1 per 8 bits of user data
Galvanic isolation	Channel – channel	No
	Channel – internal bus	Yes, with intermediate air supply
LED indicators		X1 ... 2 = Status of the IO-Link® interface 1 ... 2 PS = Electronic supply PL = Load supply - L - = Module error
Diagnostics		<ul style="list-style-type: none"> <li>• Communication error</li> <li>• Module short circuit</li> <li>• Module-oriented diagnostics</li> <li>• Undervoltage</li> </ul>
Parameterisation		<ul style="list-style-type: none"> <li>• Diagnostic behaviour</li> <li>• Fail-safe per channel</li> <li>• Forcing per channel</li> <li>• Idle mode per channel</li> <li>• Module parameters</li> </ul>
Control elements		DIL switches
Operating voltage	Nominal width [V DC]	24 (reverse polarity protected)
	Permissible range [V DC]	18 ... 30
	Power failure buffering [ms]	10
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply per channel	[A]	2x 1.6
Max. residual current of outputs per channel	[A]	2x 1.6
Degree of protection to EN 60529		IP65, IP67
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials		Reinforced PA, PC
Note on materials		RoHS-compliant
Grid dimension	[mm]	50
Dimensions (including interlinking block) W x L x H	[mm]	50 x 107 x 55
Product weight	[g]	110

 Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

## Datasheet – Interface CPX-CTEL-2

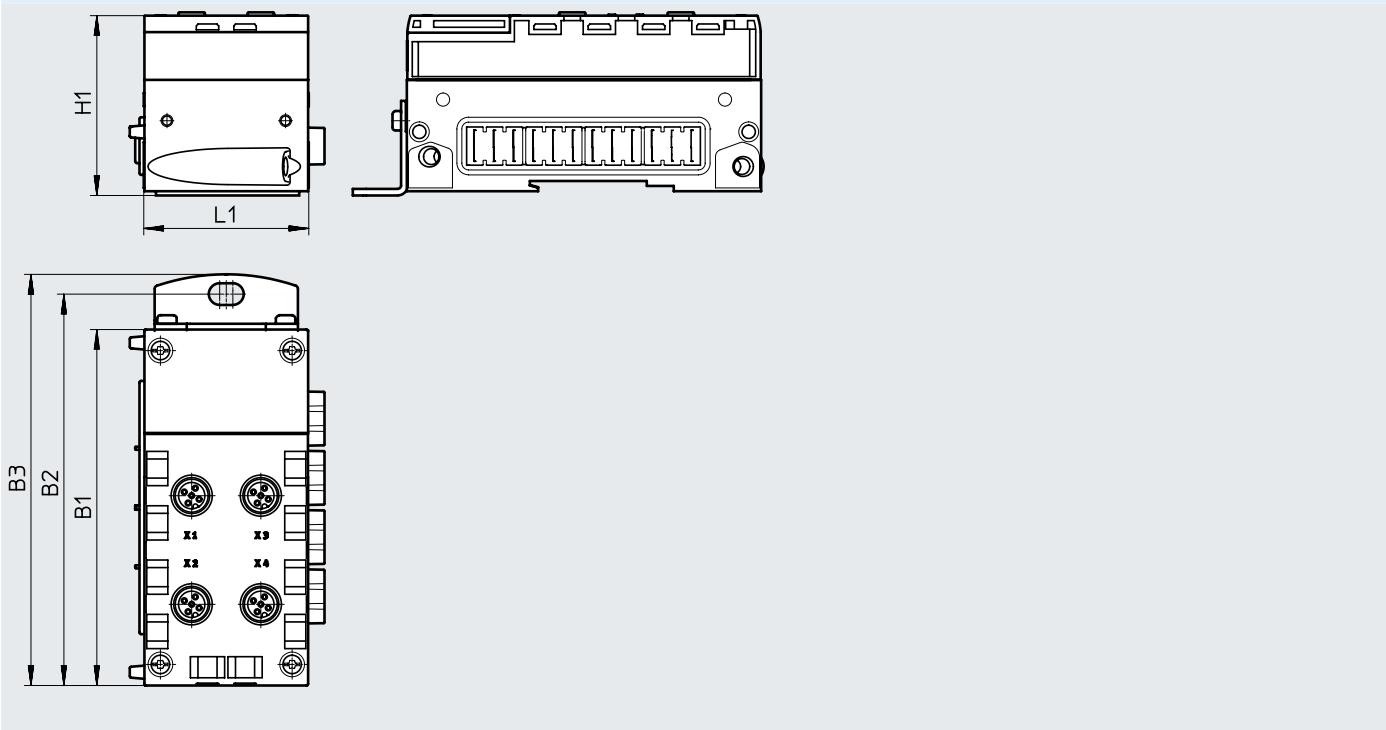
## Connection and display components



## Pin assignment– IO-Link® interface





Terminal assignment	Pin	Signal	Designation
	1	24 V <sub>SEN</sub>	24 V DC supply voltage for electronics and inputs
	2	24 V <sub>VAL</sub>	24 V DC load voltage supply for valves and outputs
	3	0 V <sub>SEN</sub>	0 V DC supply voltage for electronics and sensors
	4	C/Q I-Port	Communication signal C/Q, data transmission line
	5	0 V <sub>VALVES</sub>	0 V DC load voltage supply for valves and outputs

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	B2	B3	H1	L1
CPX-CTEL-2-M12-5POL-LK	108.1	118.9	124.9	55.1	50

## Accessories – Interface CPX-CTEL-2

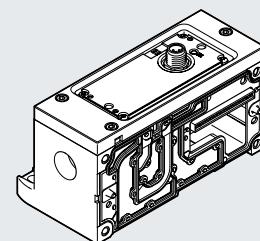
Ordering data		Part no.	Type
Designation			
<b>CPX CTEL master, IO-Link®</b>			
	Interface for max. 2 I/O modules and valve terminals with IO-Link® interface (devices)	2900543	CPX-CTEL-2-M12-5POL-LK
<b>Bus connection</b>			
	Cover cap	M12	165592
	Connecting cable M12-M12, 5-pin, straight plug-straight socket	5 m	574321
		7.5 m	574322
		10 m	574323
	Inscription label holder for connection block	536593	CPX-ST-1
<b>User documentation</b>			
	User documentation for CPX CTEL master	German	8034115
		English	8034116
		Spanish	8034117
		French	8034118
		Italian	8034119
		Swedish	8034120

## Datasheet – Valve terminal VTSA

IO-Link® interface for communication between a valve terminal VTSA and an IO-Link® master. It activates a valve terminal VTSA with up to 32 solenoid coils on max. 16 valve positions.

The connection to a higher-order controller can be achieved by:

- Connection to an I-Port master from Festo (CPX-CTEL)
- Direct mounting of a bus node CTEU
- Connection to an IO-Link® master (in IO-Link® mode)



## General technical data

Types of communication	IO-Link®	
IO-Link®, connection technology	Device, 5-pin	
IO-Link®, protocol version	Device V 1.1	
IO-Link®, communication mode	COM2.	
IO-Link®, port class	Device B	
IO-Link®, number of ports	Device 1	
IO-Link®, proc. data width OUT	Device 1-4 byte	
IO-Link®, minimum cycle time	Device 3.2 ms	
Baud rate	[kbps]	38.4
Intrinsic current consumption of electronics/sensors	[mA]	Typ. 30
Intrinsic current consumption of load	[mA]	Typ. 30
Max. number of solenoid coils	32	
Max. number of valve positions	16	
Residual ripple	[Vss]	4
Reverse polarity protection	Separate for power system (PS) and power load (PL)	
Nominal conductor cross-section	[mm²]	1
Max. cable length	[m]	20
Nominal operating voltage DC	[V]	24
Product weight	[g]	690

## Materials

Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

## Operating and environmental conditions

Corrosion resistance class CRC1	2
---------------------------------	---

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

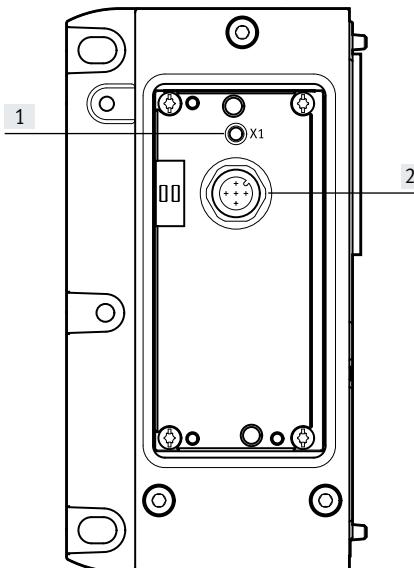
## LED indicator

	Colour	Status	Function
Status LED X1	Red/green	Off	–
		Static green	Normal operating status
		Flashing green	Communication error
		Flashing red/green	Load supply error (undervoltage or no-load supply)
		Static red	Load supply error and communication error

## Datasheet – Valve terminal VTSA

## Connection and display components

VABA-S6-1-PT



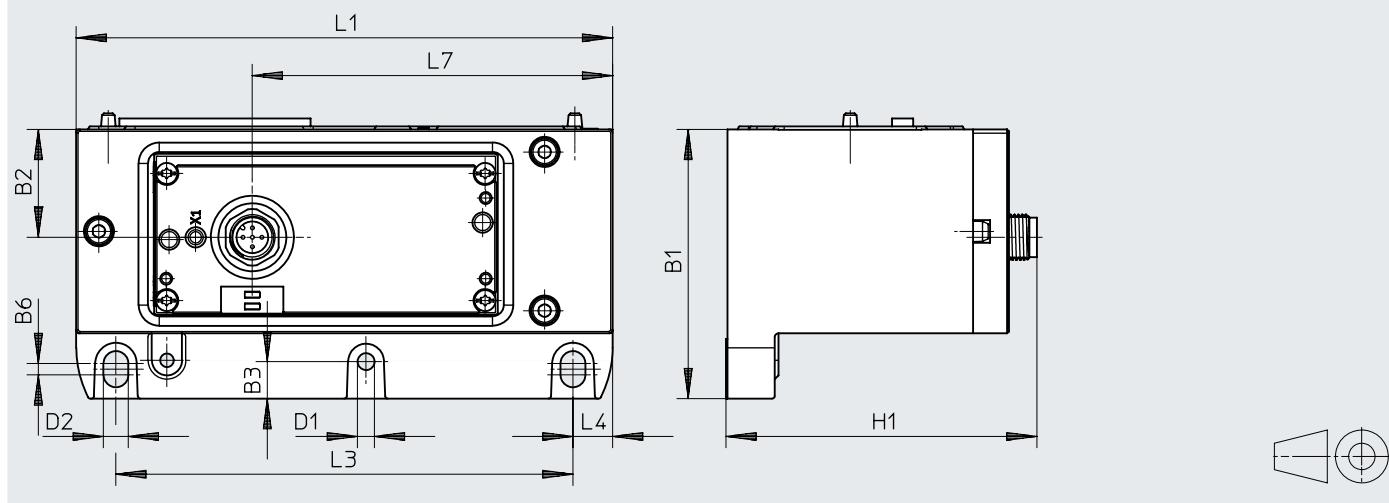
- [1] Status LED  
 [2] I-Port interface/IO-Link®

## Pin assignment – I-Port interface/IO-Link®

	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Supply, power system
	2	24V <sub>VAL/OUT</sub>	Load supply, power load
	3	0V <sub>EL/SEN</sub>	Supply, power system
	4	C/Q	Communication signal
	5	0V <sub>VAL/OUT</sub>	Load supply, power load

## Dimensions

Outlet on top

Download CAD data → [www.festo.com](http://www.festo.com)

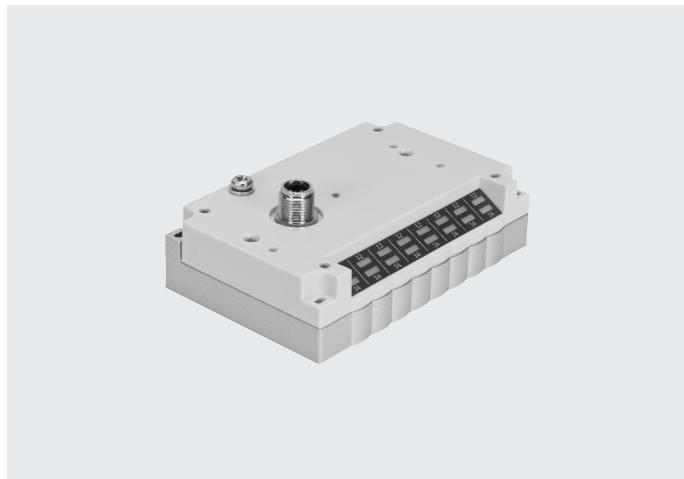
Type	B1	B2	B3	B6	D1 Ø	D2 Ø	H1	L1	L3	L4	L7
VABA-S6-1-PT	71.3	28.6	9.8	3	4.5	6.6	82.3	142	121	10.5	95.4

## Datasheet – Valve terminal VTSA

Accessories		Part no.	Type		
		8152353	VABA-S6-1-PT		
<b>Connection technology for IO-Link®</b>					
	T-adapter M12, 5-pin for IO-Link® and load voltage supply	171175	FB-TA-M12-5POL		
<b>Straight plug, for IO-Link®</b>					
	Straight plug, M12, 5-pin (for T-adapter)	8162296	NECB-S-M12G5-C2		
<b>Y-distributor for IO-Link®</b>					
	Y-distributor with cable on controller side, M12x1 A-coded, for IO-Link®	8091516	NEDU-L1R2-M12G5-M12LE-1R		
<b>Inscription label for IO-Link®</b>					
	Frame with 40 labels	565306	ALSR-C-E4		
<b>Connecting cable</b>					
	Straight – angled	Suitable for energy chains	5	574321	NEBU-M12G5-E-5-Q8N-M12G5
			7.5	574322	NEBU-M12G5-E-7.5-Q8N-M12G5
			10	574323	NEBU-M12G5-E-10-Q8N-M12G5
	Angled – angled	Standard	0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
	Straight – angled			8003617	NEBU-M12G5-K-0.5-M12W5
	Angled – angled	2 m		570734	NEBU-M12W5-K-2-M12W5
	Straight – angled			8003618	NEBU-M12G5-K-2-M12W5

## Datasheet – Valve terminals CPV

-  - Flow rate  
CPV10: up to 400 l/min  
CPV14: up to 800 l/min
-  - Valve width  
CPV10: 10 mm  
CPV14: 14 mm
-  - Voltage  
24 V DC
-  - Repair service



## General technical data

Protocol	IO-Link®/I-Port	
IO-Link®	Connection technology	5-pin
	Protocol	V 1.0
	Communication mode	COM2 (38.4 kBaud), COM3 (230 kBaud)
	Port type	B
	Number of ports	1
	Process data width OUT [bit]	16
	Minimum cycle time [ms]	3.2
Baud rate	[kbps]	38.4/230.4
Maximum number of valve positions		8
Nominal operating voltage	[V DC]	24
Nominal load voltage	[V DC]	24
Operating voltage range	Electronics/sensors [V DC]	18 ... 30
	Load voltage [V DC]	21.6 ... 26.4
Intrinsic current consumption	Operating voltage [mA]	35
	Load voltage [mA]	700
Reverse polarity protection		For operating voltage
Diagnostics		Undervoltage in load voltage supply
LED indicator	Bus-specific	1 communication status
	Product-specific	16 valve status

## Materials

Housing	Aluminium
	PA
Seal	NBR
Thread	Brass
Cover	PA
Note on materials	RoHS-compliant

## Operating and environmental conditions

Mounting position	Any
Degree of protection to EN 60529	IP65 (when fully plugged in or fitted with protective cover)
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +70
Relative humidity	[%) 93 (non-condensing)
CE marking (see declaration of conformity)	To EU EMC Directive <sup>1)</sup>
KC marking	KC EMC

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

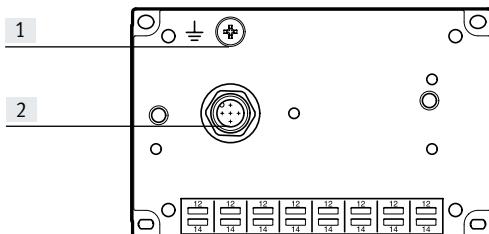
## Datasheet – Valve terminals CPV

## ATEX

ATEX category for gas	II 3G
Type of (ignition) protection for gas	Ex ec IIC Gc X
Explosion protection certification outside the EU	EPL Gc (GB)

## Connection and display components

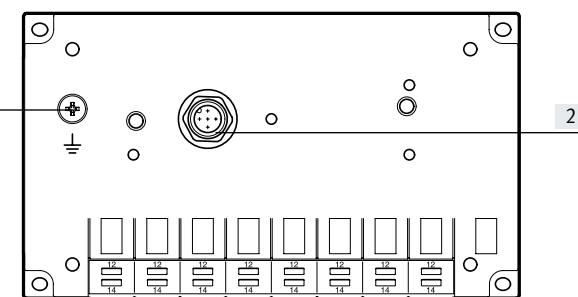
CPV10 CPV14



[1] Earthing screw

[2] I-Port interface/IO-Link®

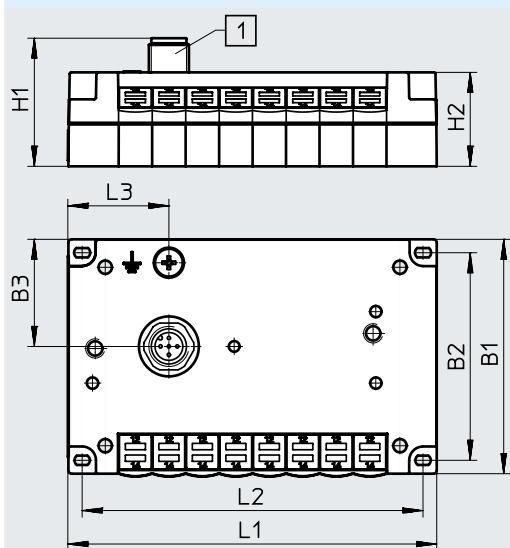
Pin assignment – I-Port interface/IO-Link®			
	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)



[1] Earthing screw


[2] I-Port interface/IO-Link®

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	B2	B3	H1	H2	L1	L2	L3
CPV10-GE-PT-8	71	62	32	38.3	26.2	110	101.8	30.2
CPV14-GE-PT-8	89	78	32.4	38.3	26.2	152	142	56.5

## Accessories – Valve terminals CPV

Ordering data		Part no.	Type
<b>I-Port bus node</b>			
	Bus node with I-Port interface/IO-Link® and 8 valve positions (maximum 8 double solenoid valves)	CPV10 CPV14	Device ID: 0x 000410 Device ID: 0x 000510 108.5 g 200 g <b>1565761</b> <b>1564984</b> <b>CPV10-GE-PT-8</b> <b>CPV14-GE-PT-8</b>
<b>Connection technology for IO-Link®</b>			
	T-adapter M12, 5-pin for IO-Link® and load voltage supply	<b>171175</b>	<b>FB-TA-M12-5POL</b>
	Straight plug, M12, 5-pin (for T-adapter)	<b>8162296</b>	<b>NECB-S-M12G5-C2</b>
<b>Connecting cable</b>			
	Straight – angled	Suitable for energy chains	5 <b>574321</b> NEBU-M12G5-E-5-Q8N-M12G5
	Angled – angled		7.5 <b>574322</b> NEBU-M12G5-E-7.5-Q8N-M12G5
	Straight – angled		10 <b>574323</b> NEBU-M12G5-E-10-Q8N-M12G5
	Angled – angled	Standard	0.5 m <b>570733</b> NEBU-M12W5-K-0.5-M12W5
	Straight – angled		<b>8003617</b> NEBU-M12G5-K-0.5-M12W5
	Angled – angled		2 m <b>570734</b> NEBU-M12W5-K-2-M12W5
	Straight – angled		<b>8003618</b> NEBU-M12G5-K-2-M12W5

## Datasheet – Valve terminals MPA-L

-	Flow rate	I-Port interface for communication between a valve terminal MPA-L and an I-Port master. It activates a valve terminal MPA-L with up to 32 solenoid coils on max. 32 valve positions.
VMPA1:	up to 360 l/min	
VMPA14:	up to 670 l/min	
VMPA2:	up to 700 l/min	
-	Valve width	The connection to a higher-order controller can be achieved by:
VMPA1:	10 mm	<ul style="list-style-type: none"> <li>• Connection to an I-Port master from Festo (CPX-CTEL)</li> </ul>
VMPA14:	14 mm	
VMPA2:	20 mm	<ul style="list-style-type: none"> <li>• Direct mounting of a bus node CTEU</li> <li>• Connection to an IO-Link® master (in IO-Link® mode)</li> </ul>
-	Voltage	
	24 V DC	



## General technical data

Protocol	IO-Link®/I-Port	
IO-Link®	Connection technology	5-pin
	Protocol	V 1.0
	Communication mode	COM2 (38.4 kBaud), COM3 (230 kBaud)
	Port type	B
	Number of ports	1
	Process data width OUT [bit]	8 ... 32
	Minimum cycle time [ms]	3.2
Baud rate	[kbps]	38.4/230.4
Operating pressure	[bar]	-0.9 ... 10
Pilot pressure	[bar]	3 ... 8
Nominal operating voltage	[V DC]	24
Intrinsic current consumption	Operating voltage [mA]	30
	Load voltage [mA]	30
Reverse polarity protection		For operating voltage
Diagnostics		Undervoltage in load voltage supply
LED indicator		1 communication status

## Materials

End plate	Reinforced PPA
Note on materials	RoHS-compliant

## Operating and environmental conditions

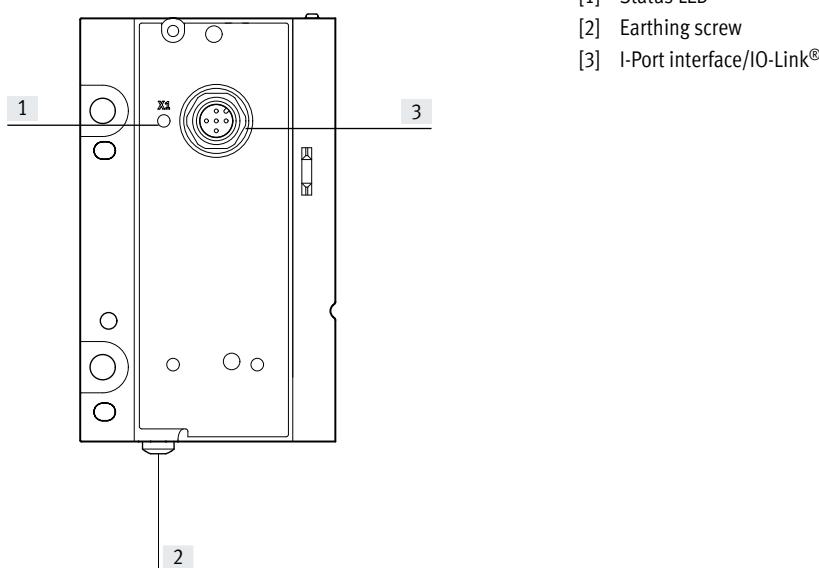
Mounting position	Any
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +40
Corrosion resistance class CRC <sup>1)</sup>	3

1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

## Datasheet – Valve terminals MPA-L

## Connection and display components

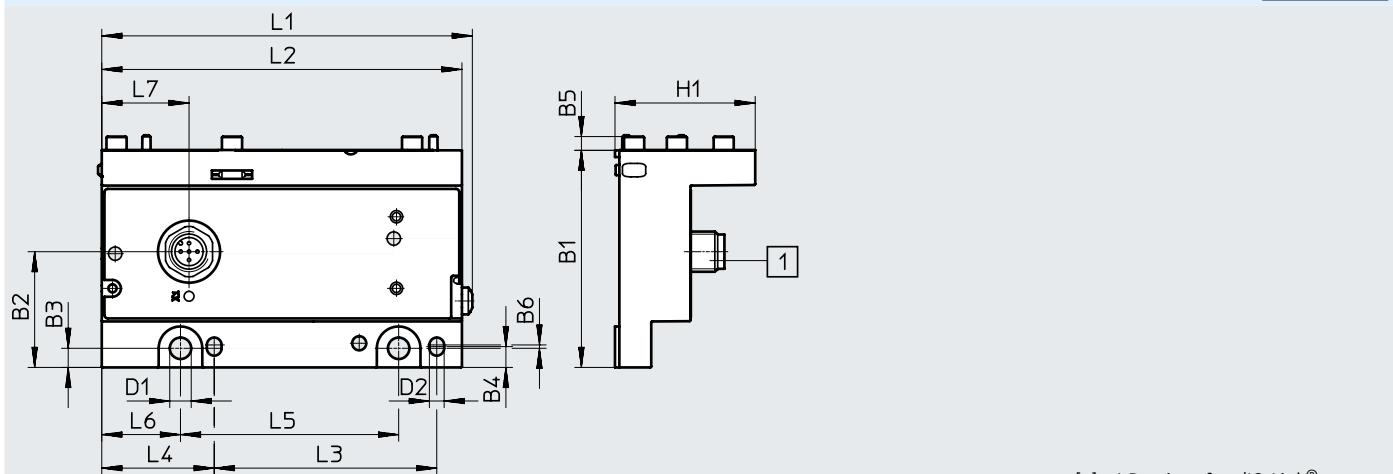
VMPAL-EPL-IP032



## Pin assignment – I-Port interface/IO-Link®



	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Type	B1	B2	B3	B4	B5	B6	D1	D2	H1	L1	L2	L3	L4	L5	L6	L7
VMPAL-EPL-IP032	64.8	34.5	5.7	6.2	4	1	6.4	4.5	41.8	110	107	66.3	33.5	65	23.5	26

## Accessories – Valve terminals MPA-L

Ordering data		Part no.	Type
<b>I-Port bus node</b>			
	Bus node with I-Port interface/IO-Link® and up to 32 valve positions (maximum 16 double solenoid valves)	Device ID: 0x 000620 170 g	<b>575667</b> <b>VMPAL-EPL-IP032</b>
<b>Connection technology for IO-Link®</b>			
	T-adapter M12, 5-pin for IO-Link® and load voltage supply	<b>171175</b>	<b>FB-TA-M12-5POL</b>
	Straight plug, M12, 5-pin (for T-adapter)	<b>8162296</b>	<b>NECB-S-M12G5-C2</b>
<b>Connecting cable</b>			
	Straight – angled	Suitable for energy chains Standard	5 m <b>574321</b> <b>NEBU-M12G5-E-5-Q8N-M12G5</b>
	Angled – angled		7.5 m <b>574322</b> <b>NEBU-M12G5-E-7.5-Q8N-M12G5</b>
	Straight – angled		10 m <b>574323</b> <b>NEBU-M12G5-E-10-Q8N-M12G5</b>
	Angled – angled		0.5 m <b>570733</b> <b>NEBU-M12W5-K-0.5-M12W5</b>
	Straight – angled		<b>8003617</b> <b>NEBU-M12G5-K-0.5-M12W5</b>
	Angled – angled		2 m <b>570734</b> <b>NEBU-M12W5-K-2-M12W5</b>
	Straight – angled		<b>8003618</b> <b>NEBU-M12G5-K-2-M12W5</b>

## Datasheet – Input modules CTS

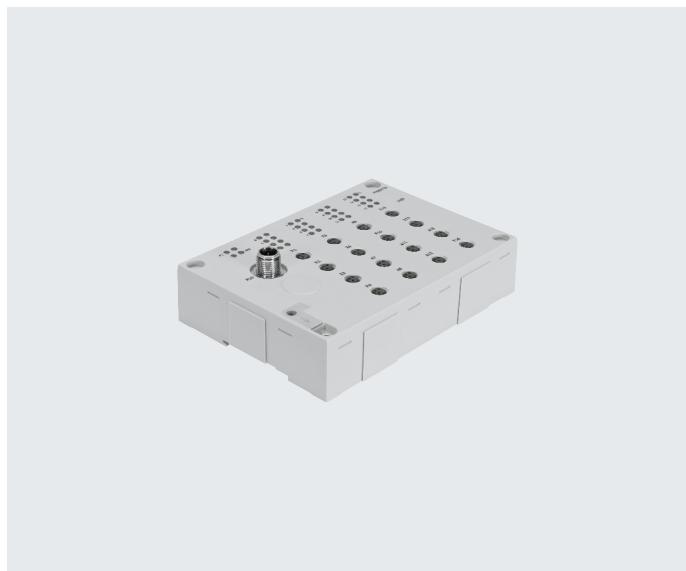
### Function

Digital input modules make it easier to connect proximity switches or other 24 V DC sensors (inductive, capacitive, etc.).

Plugs with double allocation are separated using a DUO plug or DUO cable.

### Area of application

- Input modules for 24 V DC sensor signals
- M12 connection technology
- Indication of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply
- Labelling options on all sides with large, hinged inscription label
- Earthing plate and DIN rail mounting already integrated



### General technical data

Type		CTSL-D-16E-M8-3	CTSL-D-16E-M12-5
Electrical connection		16x socket, M8, 3-pin	8x socket, M12, 5-pin
Protocol		IO-Link®/I-Port	
IO-Link®	Connection technology	5-pin	
	Protocol	V 1.0	
	Communication mode	COM2 (38.4 kBaud), COM3 (230 kBaud)	
	Port type	B	
	Number of ports	1	
	Process data width OUT [bit]	16	
	Minimum cycle time [ms]	3.2	
	Device ID [ms]	0x 700410	
Baud rate	[kbps]	38.4/230.4	
Max. number of inputs		16	
Nominal operating voltage	[V DC]	24	
Operating voltage range	[V DC]	18 ... 30	
Current consumption at nominal operating voltage of logic circuit	[mA]	Max. 35	
Max. total current per module	[mA]	1.2	
Reverse polarity protection		For operating voltage	
Fuse protection (short circuit)		Internal electronic fuse protection for each group	
Galvanic isolation between channels		No	
Switching level	Signal 0 [V]	≤5	
	Signal 1 [V]	≥11	
Input debounce time	[ms]	0.5 (3 ms, 10 ms, 20 ms parameterisable)	
Input characteristics		IEC 1131-T2	
Switching logic at inputs		PNP (positive switching)	
LED indicator	Bus-specific	X20: I-Port/IO-Link®	
	Product-specific	1 operating voltage	
		16 channel status	
		2 group diagnostics	

## Datasheet – Input modules CTSL

<b>Materials</b>	
Housing	Reinforced PA
Cover	Reinforced PA
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L
Product weight	[g]
Dimensions (W x L x H)	[mm]
	143 x 103 x 32

<b>Operating and environmental conditions</b>	
Type of mounting	Either via DIN rail or via through-hole
Degree of protection to EN 60529	IP65/IP67 (when fully plugged in or fitted with protective cover)
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +70
Corrosion resistance class CRC <sup>1)</sup>	2
CE marking (see declaration of conformity) <sup>2)</sup>	To EU EMC Directive <sup>3)</sup> To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>2)</sup>	To UK EMC regulations <sup>3)</sup> To UK RoHS regulations
KC marking	KC EMC
Certification	RCM c UL us - Listed (OL)
Certificate-issuing authority	UL E239998

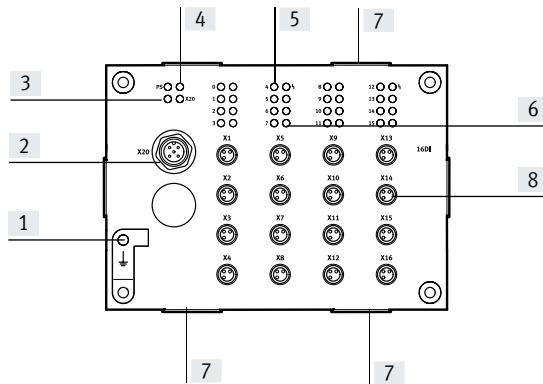
1) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)2) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.3) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

## Datasheet – Input modules CTSL

## Connection and display components

CTSL-D-16E-M8-3



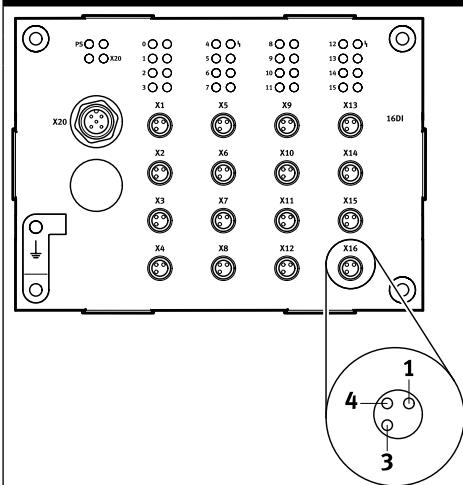
- [1] Earth connection
- [2] I-Port interface/IO-Link®
- [3] Status LED for power supply (PS)
- [4] Status LED for I-Port (X20)
- [5] Status LEDs for inputs (status indication, green)
- [6] Status LED (group) for short circuit/overload of sensor supply (red)
- [7] Holder for inscription label holder ASCF-H-E2
- [8] Sensor connections  
(1 input per socket)

## Pin assignment – I-Port interface/IO-Link®

	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	-	-
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	-	-

## Pin allocation – Sensor connections CTSL-D-16E-M8-3

## Terminal assignment



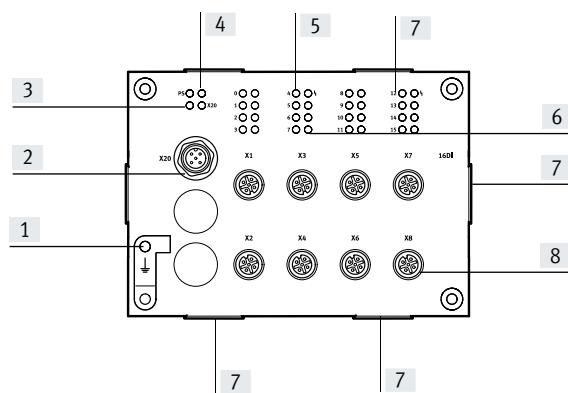
	Pin	Assignment	Description
	1	24 V	Operating voltage 24 V
	3	0 V	Operating voltage 0 V
	4	Ix*	Sensor signal

\* Ix = Input x

## Datasheet – Input modules CTSL


## Connection and display components

CTSL-D-16E-M12-5

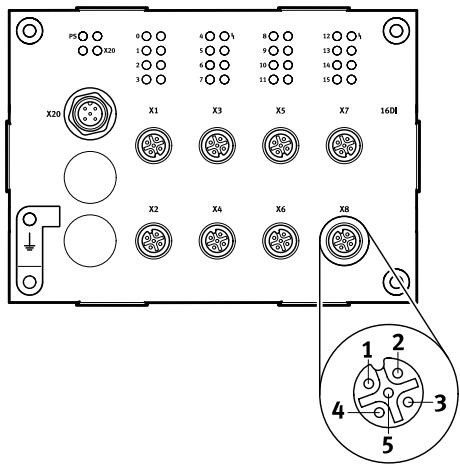


- [1] Earth connection
- [2] I-Port interface/IO-Link®
- [3] Status LED for power supply (PS)
- [4] Status LED for I-Port (X20)
- [5] Status LEDs for inputs (status indication, green)
- [6] Status LED (group) for short circuit/overload of sensor supply (red)
- [7] Holder for inscription label holder ASCF-H-E2
- [8] Sensor connections  
(2 inputs per socket)

## Pin assignment – I-Port interface/IO-Link®

	Pin	Assignment	Description
	1	24V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	–	–
	3	0V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	–	–

## Pin allocation – Sensor connections CTSL-D-16E-M12-5

Terminal assignment	Pin	Assignment	Description
	1	24 V	Operating voltage 24 V
	2	I <sub>x+1</sub> *	Sensor signal
	3	0 V	Operating voltage 0 V
	4	I <sub>x</sub> *	Sensor signal
	5	FE	Functional earth

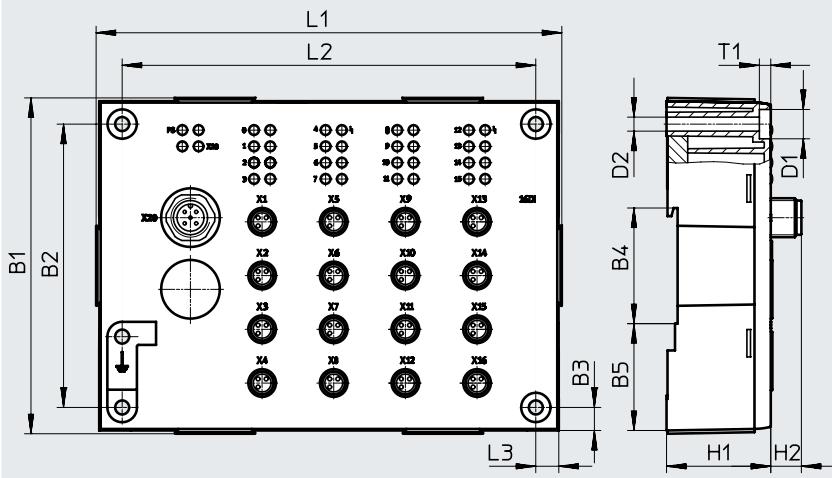
\* I<sub>x</sub> = Input x

## Datasheet – Input modules CTS

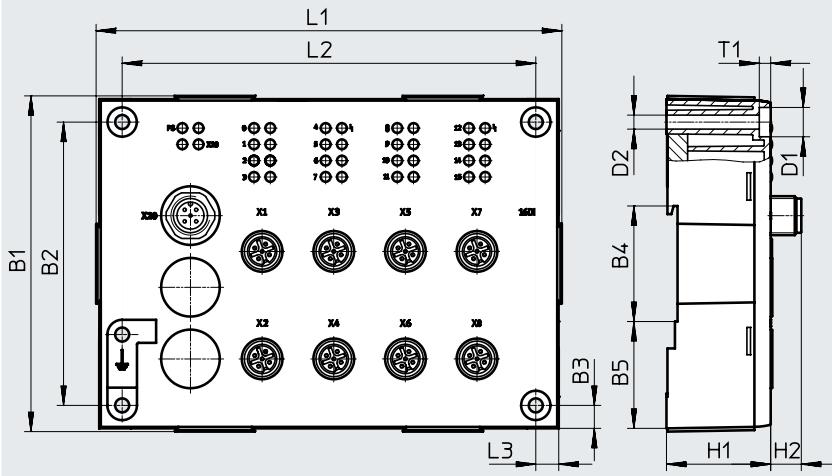
## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

CTSL-D-16E-M8-3





CTSL-D-16E-M12-5



Type	B1	B2	B3	B4	B5	D1	D2	H1	H2	L1	L2	L3	T1
CTSL-D-16E	103	87	7	35.5	32.8	9	4.3	32	9.4	143	127	7	3.5

## Accessories – Input modules CTSL

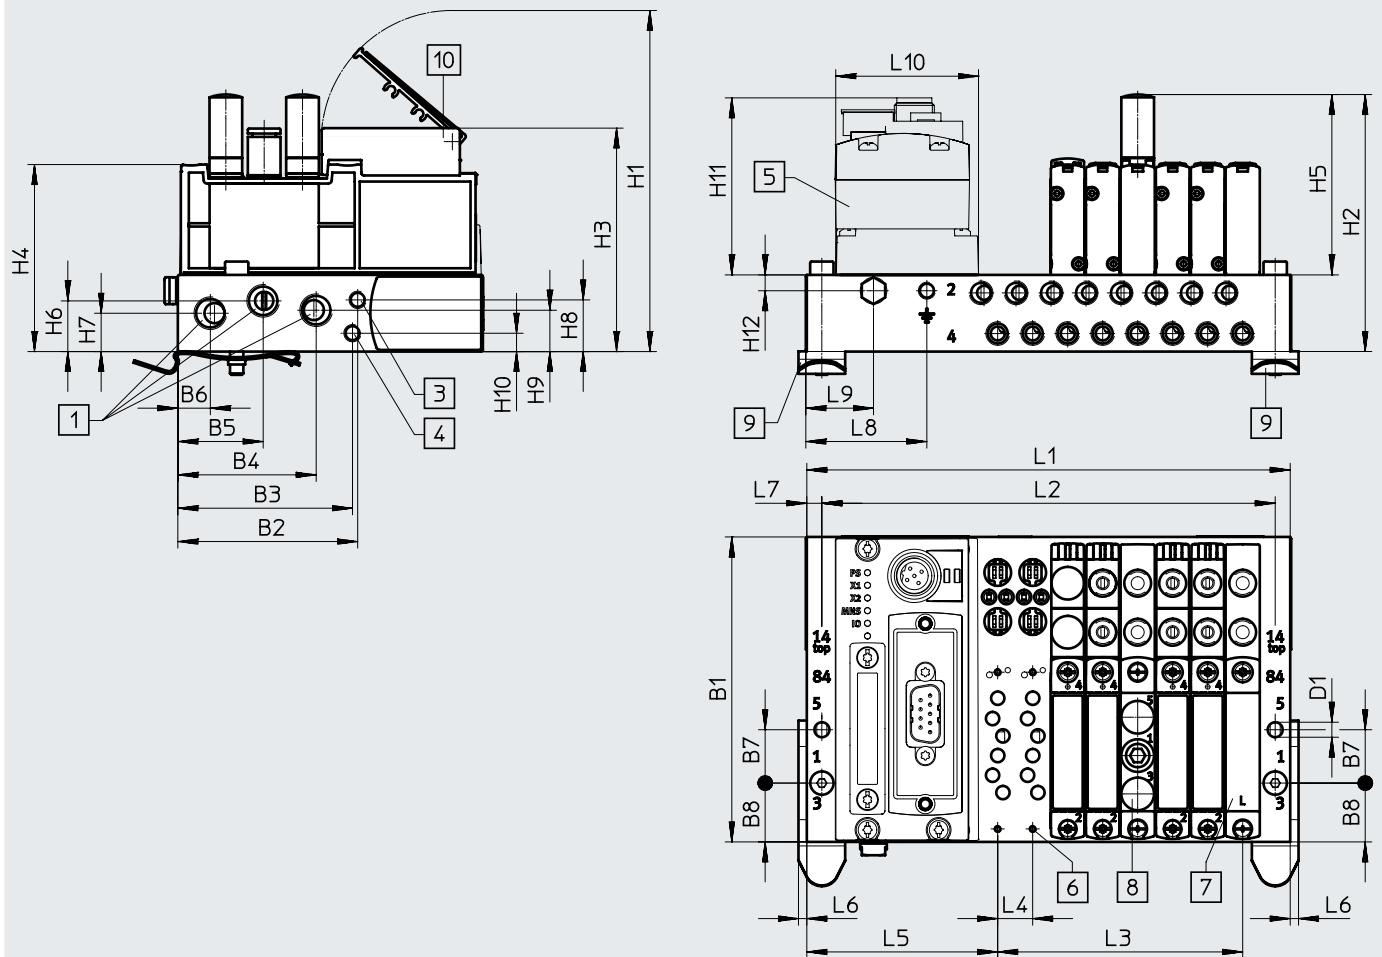
Ordering data		Part no.	Type	
Designation				
<b>Input modules</b>				
	16 sensor connections M8, 3-pin, single allocation 8 sensor connections M12, 5-pin, double allocation	1387363 1387359	CTSL-D-16E-M8-3 CTSL-D-16E-M12-5	
<b>Plug connector</b>				
	Straight plug, M12	5-pin 4-pin	8162296 8162294	
	Straight plug connector, M8	3-pin	8162298	NECB-S-M8G3-C2
	Plug for 2 cables, M12	4-pin 5-pin	8162295 8162297	
				NECB-S-M12G5-C2-D
<b>Connecting cables</b>				
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m 5.0 m	539052 539052	NEBU-M12G4-K-2.5-M12G4 <sup>1)</sup> NEBU-M12G4-K-5-M12G4 <sup>1)</sup>
	Connecting cable, M8, 3-pin, straight plug-straight socket	0.5 m	539052	NEBU-M8G3-K-0.5-M8G3 <sup>1)</sup>
		1 m	539052	NEBU-M8G3-K-1-M8G3 <sup>1)</sup>
		2.5 m	539052	NEBU-M8G3-K-2.5-M8G3 <sup>1)</sup>
		5 m	539052	NEBU-M8G3-K-5-M8G3 <sup>1)</sup>
	Straight – angled	5 m 7 m 10 m	574321 574322 574323	NEBU-M12G5-E-5-Q8N-M12G5 NEBU-M12G5-E-7.5-Q8N-M12G5 NEBU-M12G5-E-10-Q8N-M12G5
	Angled – angled	0.5 m	570733	NEBU-M12W5-K-0.5-M12W5
	Straight – angled		8003617	NEBU-M12G5-K-0.5-M12W5
	Angled – angled	2 m	570734	NEBU-M12W5-K-2-M12W5
	Straight – angled		8003618	NEBU-M12G5-K-2-M12W5
<b>Inscription label holder</b>				
	Inscription label holders for EL modules, bag of 10	547473	ASCF-H-E2	

1) Modular product, more information at Internet: nebu

## Example of a valve terminal VTUG with I-Port interface

**Dimensions – Example of a valve terminal with I-Port interface,  
size 10**

Download CAD data → [www.festo.com](http://www.festo.com)



- [1] Ports 1, 3 and 5: G1/8 (at both ends)
- [3] Ports 12/14: M5 (at both ends)
- [4] Ports 82/84: M5 (at both ends)

- [5] CTEU-CANopen
- [6] Valves/cover plates/  
supply plates – mounting on  
sub-base: M2

- [7] Cover plate
- [8] Supply plate,  
ports 1, 3 and 5: M7

- [9] DIN rail mounting
- [10] Inscription label holder

## Example of a valve terminal VTUG with I-Port interface

Type	No. of valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of valve positions	Size 10										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	54.8	4.8	10.5	57.3	2.5	4.5	36	20	42.5

Type	No. of valve positions	Size 10									
		L1			L2				L3		
VABM	4	103			94				31.5		
	5	113.5			104.5				42		
	6	124			115				52.5		
	7	134.5			125.5				63		
	8	145			136				73.5		
	9	155.5			146.5				84		
	10	166			157				94.5		
	12	187			178				115.5		
	16	229			220				157.5		
	20	271			262				199.5		
	24	313			304				241.5		