

Air Cylinder: With End Lock

CBM2 Series

ø20, ø25, ø32, ø40

How to Order

CBM2 L 40 - 150 - H N -

With auto switch CDBM2 L 40 - 150 - H N - M9BW - C -

With auto switch
(Built-in magnet)

Mounting

B	Basic	T	Head trunnion
L	Axial foot	E	Integrated clevis
F	Rod flange	BZ	Boss-cut/Basic
G	Head flange	FZ	Boss-cut/Rod flange
C	Single clevis	UZ	Boss-cut/Rod trunnion
D	Double clevis		
U	Rod trunnion		

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm

Cylinder stroke (mm)
Refer to "Standard Strokes" on page 252.

Manual release

N	Non-locking type
L	Locking type

Lock position

H	Head end lock
R	Rod end lock
W	Double end lock

Auto switch mounting bracket^(Note)
Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
------------	---------------------

Rod boot

J	None
Nil	Nylon tarpaulin
K	Heat resistant tarpaulin

Cushion

Nil	Rubber bumper
A	Air cushion

Auto switch
* For applicable auto switches, refer to the table below.

Made to Order
Refer to page 252 for details.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDBM2L40-100-HN

Applicable Auto Switches/Refer to pages 1575 to 1701 for further information on auto switches.

Type	Special function	Electrical entry	Indicator/light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load			
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)			None (N)		
																5 V, 12 V	24 V
Solid state auto switch	—	Grommet	No	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	●	●	●	○	—	○	Relay, PLC		
				3-wire (PNP)			M9PV	M9P	●	●	●	○	—	○			
		Connector		2-wire	12 V	—	M9BV	M9B	●	●	●	○	—	○			
				Terminal conduit			2-wire	—	H7C	●	●	●	○	—		○	
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	—	G39A**	—	—	—	—	—	—		—	
				3-wire (PNP)			—	K39A**	—	—	—	—	—	—			
		Grommet		2-wire	12 V	—	M9NVV	M9NV	●	●	●	○	—	○			
				3-wire (NPN)			M9PVV	M9PV	●	●	●	○	—	○			
		Water resistant (2-color indicator)		Grommet	No	2-wire	12 V	—	M9BVV	M9BV	●	●	●	○		—	○
						3-wire (NPN)			M9NAV*1	M9NA*1	○	○	○	○		—	○
With diagnostic output (2-color indicator)	Grommet	Yes	3-wire (PNP)	5 V, 12 V	—	M9PAV*1	M9PA*1	○	○	○	○	—	○				
			2-wire			—	M9BA*1	○	○	○	○	—	○				
Reed auto switch	—	Grommet	No	3-wire (NPN equivalent)	5 V	—	A96V	A96	●	●	●	—	—	○	Relay, PLC		
				2-wire			24 V	12 V	—	A93V*2	A93	●	●	●		—	—
		Connector		100 V	A90V	A90			●	●	●	—	—	—			
				Terminal conduit	100 V or less	—	B54**	●	●	●	—	—	—				
	DIN terminal	200 V or less	—		B64**	●	●	●	—	—	—						
		Grommet	24 V or less	—	C73C	●	●	●	—	—	—						
	Diagnostic indication (2-color indicator)		Grommet	Yes	2-wire	24 V	12 V	—	C80C	●	●	●	—	—		○	
		—			—			A33A**	—	—	—	—	—	—			
		100 V, 200 V			—			A34A**	—	—	—	—	—	—			
		—			—			A44A**	—	—	—	—	—	—			
—	—	—	—	—	—	—	B59W	●	●	●	—	—	—				

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

*2 Please contact SMC regarding water resistant types with the above model numbers.

*3 1 m type lead wire is only applicable to D-A93.

*4 Lead wire length symbols: 0.5 m Nil (Example) M9NV
1 m M (Example) M9NVW
3 m L (Example) M9NWL
5 m Z (Example) M9NVZ
None N (Example) H7CN

*5 Solid state auto switches marked with "○" are produced upon receipt of order.

*6 Do not indicate suffix "N" for no lead wire on D-A3□/A44A/G39A/K39A models.

*7 The D-A3□/A44A/G39A/K39A/B54/B64 cannot be mounted on bore sizes ø20 and ø25 cylinder with air cushion.

*8 Since there are other applicable auto switches than listed above, refer to page 266 for details.

*9 For details about auto switches with pre-wired connector, refer to pages 1648 and 1649.

*10 The D-A9□/M9□□□ auto switches are shipped together, (but not assembled). (However, only the auto switch mounting brackets are assembled before shipment.)



- CG1
- CG2
- CG3
- JMB
- MB
- MB1
- CA2
- CS1
- CS2

- D-□
- X□
- Technical Data

CBM2 Series

Holds the cylinder's home position even if the air supply is cut off.

When air is discharged at the stroke end position, the lock engages to maintain the rod in that position.

Non-locking type and locking type are standardized for manual release.


Auto switch is mountable.



Symbol

Rubber bumper

Air cushion



Made to Order
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat resistant cylinder (-10 to 150°C)
-XB9	Low speed cylinder (10 to 50 mm/s)
-XC3	Special port location
-XC4 *1	With heavy duty scraper
-XC5	Heat resistant cylinder (-10 to 110°C)
-XC6 *2	Made of stainless steel
-XC8 *1	Adjustable stroke cylinder/Adjustable extension type
-XC13	Auto switch rail mounting
-XC22	Fluororubber seal
-XC25	No fixed throttle of connection port
-XC27	Double clevis and double knuckle pins made of stainless steel
-XC29	Double knuckle joint with spring pin
-XC35	With coil scraper
-XC52	Mounting nut with set screw

*1 Available only for locking at head end

*2 Double end lock is available as a special order.

Specifications

Bore size (mm)	20	25	32	40
Type	Pneumatic			
Action	Double acting, Single rod			
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.15 MPa *			
Ambient and fluid temperature	Without auto switch: -10°C to 70°C With auto switch: -10°C to 60°C (No freezing)			
Cushion	Rubber bumper, Air cushion			
Lubrication	Not required (Non-lube)			
Stroke length tolerance	+1.4 mm			
Piston speed	Rubber bumper	50 to 750 mm/s		
	Air cushion	50 to 1000 mm/s		
Mounting	Basic, Axial foot, Rod flange, Head flange, Single clevis, Double clevis, Rod trunnion, Head trunnion			

* 0.05 MPa for other part than the lock unit

Lock Specifications

Lock position	Head end, Rod end, Double end			
Holding force (Max.) (N)	ø20	ø25	ø32	ø40
	215	330	550	860
Backlash	1 mm or less			
Manual release	Non-locking type, Locking type			

Allowable Kinetic Energy

Bore size (mm)		20	25	32	40
Rubber bumper	Allowable kinetic energy (J)	0.27	0.4	0.65	1.2
	Effective cushion length (mm)	11.0	11.0	11.0	11.8
Air cushion	Cushion sectional area (cm ²)	2.09	3.30	5.86	9.08
	Absorbable kinetic energy (J)	0.54	0.78	1.27	2.35

Standard Strokes

Bore size (mm)	Standard stroke (mm)	Long stroke * (mm)	Maximum manufacturable stroke (mm)
20	25, 50, 75, 100, 125, 150, 200, 250 300	400	1000
25		450	
32		450	
40		500	

* Long stroke applies to the axial foot and rod flange types only.

When using other types of mounting brackets or exceeding the long stroke limit, refer to "Air Cylinders Model Selection" on front matter pages.

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Refer to pages 262 to 266 for cylinders with auto switches.

- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Minimum stroke for auto switch mounting
- Operating range
- Auto switch mounting brackets/Part no.

Accessories For details, refer to pages 189 and 190, since it is the same as CM2 series standard type.

Standard	Mounting nut, Rod end nut, Lock release bolt (N type only)
Option	Single knuckle joint, Double knuckle joint (with pin)

- * Mounting nuts are not equipped to single clevis and double clevis.
- * Stainless steel mounting brackets and accessories are also available. Refer to page 190 for details.

Rod Boot Material

Symbol	Rod boot material	Max. ambient temperature
J	Nylon tarpaulin	60°C
K	Heat resistant tarpaulin	110°C*

- * Maximum ambient temperature for the rod boot itself.

Weights

Bore size (mm)		20	25	32	40
Basic weight	Basic	0.14	0.21	0.28	0.56
	Axial foot	0.29	0.37	0.44	0.83
	Flange	0.20	0.30	0.37	0.68
	Single clevis	0.18	0.25	0.32	0.65
	Double clevis	0.19	0.27	0.33	0.69
	Trunnion	0.18	0.28	0.34	0.66
	Boss-cut/Basic	0.13	0.19	0.26	0.53
	Boss-cut/Flange	0.19	0.28	0.35	0.65
	Boss-cut/Trunnion	0.17	0.26	0.32	0.63
	Additional weight per 50 mm of stroke		0.04	0.06	0.08
Option bracket	Clevis pivot bracket (with pin)	0.07	0.07	0.14	0.14
	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pin)	0.07	0.07	0.07	0.20
	Pivot bracket	0.06	0.06	0.06	0.06
	Pivot bracket pin	0.02	0.02	0.02	0.03

Lock Unit Additional Weights

Bore size (mm)		20	25	32	40
Non-locking type manual release (N)	Head end lock (H)	0.02	0.02	0.02	0.04
	Rod end lock (R)	0.01	0.01	0.01	0.02
	Double end lock (W)	0.03	0.03	0.03	0.06
Locking type manual release (L)	Head end lock (H)	0.03	0.03	0.03	0.06
	Rod end lock (R)	0.02	0.02	0.02	0.04
	Double end lock (W)	0.05	0.05	0.05	0.10

Calculation: (Example) **CBM2L32-100-HN**

- Basic weight.....0.44 (Foot, ø32)
- Additional weight.....0.08/50 stroke
- Cylinder stroke.....100 stroke
- Lock unit weight.....0.02 (Locking at head end, Non-locking type manual release)

$$0.44 + 0.08 \times 100/50 + 0.02 = \mathbf{0.62 \text{ kg}}$$

Mounting Brackets/Part No.

Mounting bracket	Min. order qty	Bore size (mm)				Contents (for minimum order quantity)
		20	25	32	40	
Axial foot*	2	CM-L020B	CM-L032B	CM-L040B		2 feet, 1 mounting nut
Flange	1	CM-F020B	CM-F032B	CM-F040B		1 flange
Single clevis**	1	CM-C020B	CM-C032B	CM-C040B		1 single clevis, 3 liners
Double clevis (with pin)***	1	CM-D020B	CM-D032B	CM-D040B		1 double clevis, 3 liners, 1 clevis pin, 2 retaining rings
Double clevis pin	1	CDP-1		CDP-2		1 clevis pin, 2 retaining rings (split pins)
Trunnion (with nut)	1	CM-T020B	CM-T032B	CM-T040B		1 trunnion, 1 trunnion nut
Rod end nut	1	NT-02	NT-03	NT-04		1 rod end nut
Mounting nut	1	SN-020B	SN-032B	SN-040B		1 mounting nut
Trunnion nut	1	TN-020B	TN-032B	TN-040B		1 trunnion nut
Single knuckle joint	1	I-020B	I-032B	I-040B		1 single knuckle joint
Double knuckle joint	1	Y-020B	Y-032B	Y-040B		1 double knuckle joint, 1 knuckle pin, 2 retaining rings
Double knuckle joint pin	1	CDP-1		CDP-3		1 knuckle pin, 2 retaining rings (split pins)
Clevis pivot bracket pin (For CM2E/CM2V)	1	CD-S02		CD-S03		1 clevis pin, 2 retaining rings
Clevis pivot bracket (For CM2E/CM2V)	1	CM-E020B		CM-E032B		1 clevis pivot bracket, 1 clevis pin, 2 retaining rings
Pivot bracket (For CM2C)	1	CM-B032			CM-B040	2 pivot brackets (1 of each type)
Pivot bracket pin (For CM2C)	1	CDP-1			CD-S03	1 pin, 2 retaining rings
Pivot bracket (For CM2T/CM2U)	1	CM-B020	CM-B032		CM-B040	2 pivot brackets (1 of each type)

* Order 2 feet per cylinder.

** 3 liners are included with a clevis bracket for adjusting the mounting angle.

*** A clevis pin and retaining rings (split pins for ø40) are included.

For dimensions of accessories (options), refer to pages 189 and 190.

- ▶ CJ1
- ▶ CJP
- ▶ CJ2
- ▶ JCM
- ▶ **CM2**
- ▶ CM3
- ▶ CG1
- ▶ CG3
- ▶ JMB
- ▶ MB
- ▶ MB1
- ▶ CA2
- ▶ CS1
- ▶ CS2

- ▶ D-□
- ▶ -X□
- ▶ Technical Data

CBM2 Series

Double Rod Type End Lock Cylinder

CBM2W **Mounting type** **Bore size** — **Stroke** — H **Manual release type**

↓ Double rod type end lock cylinder

Specifications

Action	Double acting, Double rod
Bore size (mm)	ø20, ø25, ø32, ø40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.15 MPa
Cushion	Rubber bumper
Piston speed	50 to 750 mm/s
Mounting	Basic, Foot, Flange, Trunnion
Lock position	Head end lock
Max. manufacturable stroke	500 mm

Note 1) Auto switch can be mounted.


Note 2) Refer to the Precautions on page 257 when mounting flange and trunnion brackets on the end lock side.

Note 3) When exceeding 300 strokes, refer to the stroke selection table.

Dimensions

Bore size (mm)	H	ZZ
20	41	144
25	45	152
32	45	154
40	50	188

* Dimensions for other bore sizes are the same as the double acting single rod model.

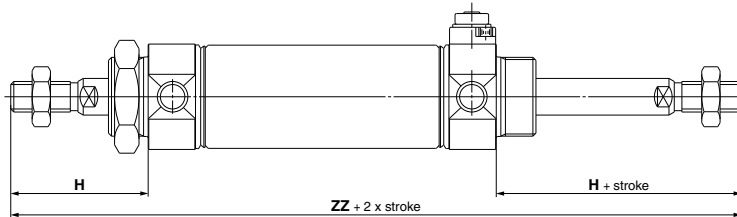

Non-rotating Rod Type End Lock Cylinder

CBM2K **Mounting type** **Bore size** — **Stroke** — H **Manual release type**

↓ Non-rotating rod type end lock cylinder

Specifications

Action	Double acting, Double rod
Bore size (mm)	ø20, ø25, ø32, ø40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.15 MPa
Cushion	Rubber bumper
Piston speed	50 to 500 mm/s
Mounting	Basic, Foot, Rod flange, Head flange, Single clevis, Double clevis, Rod trunnion, Head trunnion
Lock position	Head end lock
Max. manufacturable stroke	1000 mm

Note 1) Auto switch can be mounted.


Note 2) Refer to the Precautions on page 257 for the head flange and head trunnion types.

Note 3) When exceeding 300 strokes, refer to the stroke selection table.

Dimensions

Bore size (mm)	KA
20	8.2
25	10.2
32	12.2
40	14.2

* Dimensions for other bore sizes are the same as the double acting single rod model.

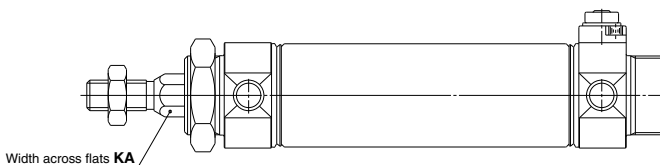


Construction

Head end lock


Non-locking type manual release: Suffix N

Locking type manual release: Suffix L

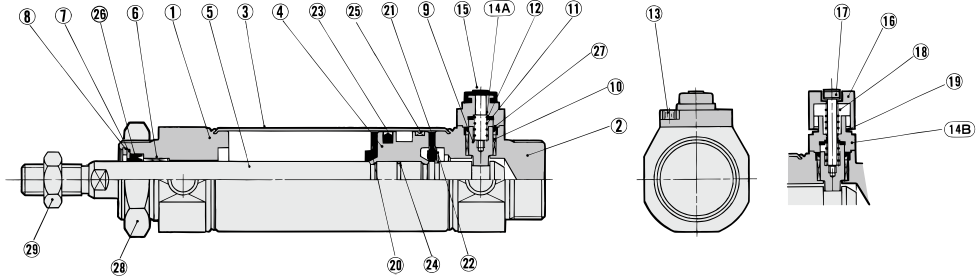

Rod end lock

With air cushion

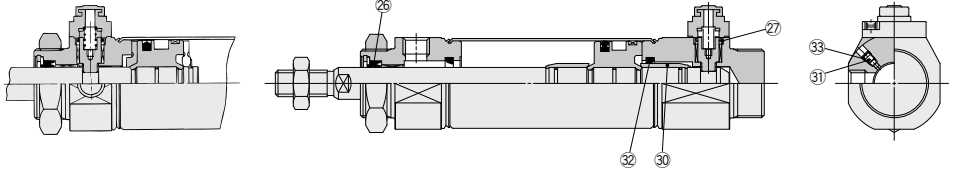

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Stainless steel	
4	Piston	Aluminum alloy	Chromated
5	Piston rod	Carbon steel	Hard chrome plating
6	Bushing	Bearing alloy	
7	Seal retainer	Stainless steel	
8	Retaining ring	Carbon steel	Phosphate coating
9	Lock piston	Carbon steel	Hard chrome plating. Heat treated
10	Lock bushing	Bearing alloy	
11	Lock spring	Stainless steel	
12	Bumper	Urethane	
13	Hexagon socket head cap screw	Alloy steel	Black zinc chromated
14A	Cap A	Aluminum die-casted	Black painted
14B	Cap B	Carbon steel	Oxide film treated
15	Rubber cap	Synthetic rubber	
16	M/O knob	Zinc die-casted	Black painted
17	M/O bolt	Alloy steel	Black zinc chromated. Red painted
18	M/O spring	Steel wire	Zinc chromated
19	Stopper ring	Carbon steel	Zinc chromated
20	Bumper A	Urethane	
21	Bumper B	Urethane	
22	Retaining ring	Stainless steel	
23	Piston seal	NBR	
24	Piston gasket	NBR	
25	Wear ring	Resin	
28	Mounting nut	Carbon steel	Nickel plating
29	Rod end nut	Carbon steel	Zinc chromated
30	Cushion ring	Aluminum alloy	Anodized
31	Cushion needle	Alloy steel	Electroless nickel plating
32	Cushion seal	Urethane	

Component Parts

No.	Description	Material	Note
26	Rod seal	NBR	
27	Lock piston seal	NBR	
33	Cushion needle seal	NBR	

Replacement Parts: Seal Kit

With one end lock

Bore size (mm)	20	25	32	40
Kit no.	CBM2-20-PS	CBM2-25-PS	CBM2-32-PS	CBM2-40-PS

With double end lock

Kit no.	CBM2-20-PS-W	CBM2-25-PS-W	CBM2-32-PS-W	CBM2-40-PS-W
---------	--------------	--------------	--------------	--------------

* Seal kit includes 26 and 27. Order the seal kit, based on each bore size. (Except 33.)

* Seal kit includes a grease pack (10 g). Order with the following part number when only the grease pack is needed.

Grease pack part number: GR-S-010 (10 g)


How to Replace the Rod Seal

<Removal>

- Remove the retaining ring (A) by using a tool for installing a type C retaining ring for hole. Shut off the port on the rod cover by finger and then pull out the piston rod, and the seal retainer (B) and the rod seal (C) are removed.

<Mounting>

- After applying enough grease on the rod seal, attach in this order, rod seal (C), seal retainer (B) and retaining ring (A).

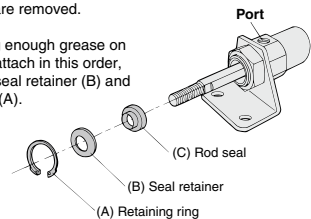

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□



-X□

Technical Data

CBM2 Series



Basic (Dimensions are common irrespective of the lock position; rod end, head end or double end.)

Head end lock: CBM2B Bore size – Stroke -HN

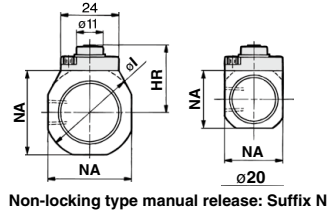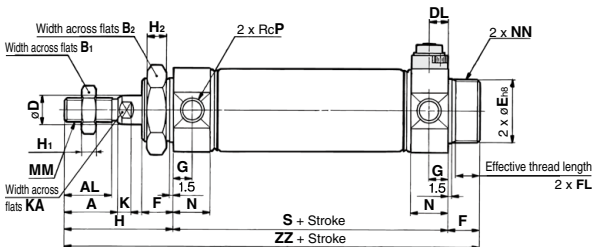


Non-locking type manual release: Suffix N

Rod end lock: CBM2B Bore size – Stroke -RN




Locking type manual release: Suffix L

Double end lock: CBM2B Bore size – Stroke -WN



With rod boot

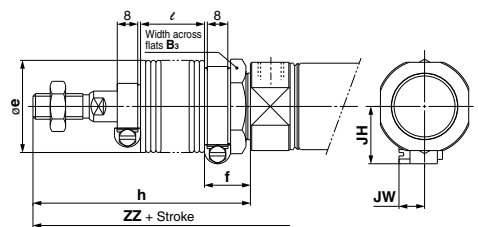

Symbol	Stroke range	A	AL	B ₁	B ₂	D	DL	E	F	FL	G	H	H ₁	H ₂	HR	HN (Max.)	I	K	KA	MM	MO	N	NA	NN	P	S	ZZ
20	Up to 300	18	15.5	13	26	8	7.5	20 ⁰ _{-0.033}	13	10.5	8	41	5	8	22.3	34	28	5	6	M8 x 1.25	15	15	24	M20 x 1.5	1/8	62	116
25	Up to 300	22	19.5	17	32	10	7.5	26 ⁰ _{-0.033}	13	10.5	8	45	6	8	25.3	37	33.5	5.5	8	M10 x 1.25	15	15	30	M26 x 1.5	1/8	62	120
32	Up to 300	22	19.5	17	32	12	7.5	26 ⁰ _{-0.033}	13	10.5	8	45	6	8	27.6	39.3	37.5	5.5	10	M10 x 1.25	15	15	34.5	M26 x 1.5	1/8	64	122
40	Up to 300	24	21	22	41	14	10.7	32 ⁰ _{-0.039}	16	13.5	11	50	8	10	33.6	47.8	46.5	7	12	M14 x 1.5	19	21.5	42.5	M32 x 2	1/4	88	154

With Rod Boot

Symbol	B ₃	e	f	h								ℓ							
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500		
20	30	36	18	68	81	93	106	131	156	181	12.5	25	37.5	50	75	100	125		
25	32	36	18	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125		
32	32	36	18	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125		
40	41	46	20	77	90	102	115	140	165	190	12.5	25	37.5	50	75	100	125		



With Rod Boot

Symbol	ZZ								JH	JW
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500			
20	143	156	168	181	206	231	256	23.5	10.5	
25	147	160	172	185	210	235	260	23.5	10.5	
32	149	162	174	187	212	237	262	23.5	10.5	
40	181	194	206	219	244	269	294	27	10.5	


* For details about the rod end nut and accessories, refer to pages 189 and 190.

With Mounting Bracket (For dimensions other than shown below, refer to page 256.)


Axial foot: CBM2L Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$




Rod flange: CBM2F Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$

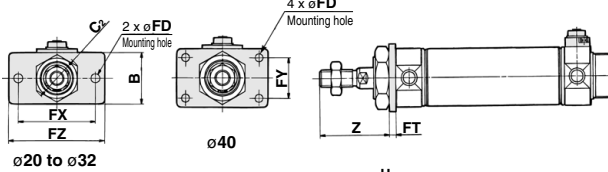


Head flange: CBM2G Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$



Single clevis: CBM2C Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$

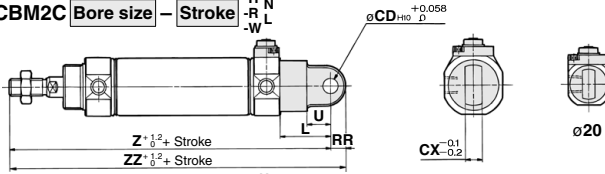


Double clevis: CBM2D Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$

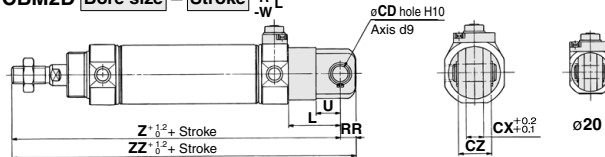


* A clevis pin and retaining rings (split pins for ø40) are shipped together.

Rod trunnion: CBM2U Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$

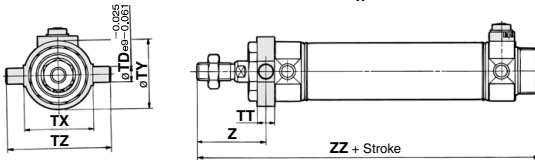

Head trunnion: CBM2T Bore size – Stroke $\begin{matrix} -H \\ -R \\ -L \\ -W \end{matrix} N^*$

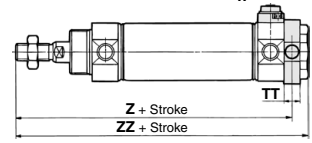

* The bracket is shipped together.

Bore size (mm)	Axial foot													Flange								Clevis										Trunnion											
	Stroke range	B	LC	LD	LL	LS	LT	LX	LZ	X	Y	Z	ZZ	Stroke range	B	C	FD	FT	FX	FY	FZ	Z	Stroke range	CD	CX	CZ	LR	UR	Z	ZZ	Stroke range	TD	TT	TX	TY	TZ	Z	ZZ					
		Rod side	Head side	Rod side	Head side	Rod side	Head side	Rod side	Head side	Rod side	Head side	Rod side	Head side		Rod side	Head side																											
20	up to 400	40	4	6.8	25	102	3.2	40	55	20	8	21	131	up to 400	up to 300	34	30	7	4	60	—	75	37	107	up to 300	9	10	19	30	9	14	133	142	up to 300	8	10	32	32	52	36	108	116	118
25	up to 450	47	4	6.8	28	102	3.2	40	55	20	8	25	135	up to 450	up to 300	40	37	7	4	60	—	75	41	111	up to 300	9	10	19	30	9	14	137	146	up to 300	9	10	40	40	60	40	112	120	122
32	up to 450	47	4	6.8	28	104	3.2	40	55	20	8	25	137	up to 450	up to 300	40	37	7	4	60	—	75	41	113	up to 300	9	10	19	30	9	14	139	148	up to 300	9	10	40	40	60	40	114	122	124
40	up to 500	54	4	7	30	134	3.2	55	75	23	10	27	171	up to 500	up to 300	52	47.3	7	5	66	36	82	45	143	up to 300	10	15	30	39	11	18	177	188	up to 300	10	11	53	53	77	44.5	143.5	154	154

* Dimensions other than mentioned above are the same as on page 256.

Precautions on Trunnion Type, Flange Type

1. Trunnion type

(1) Rod trunnion with rod end lock (2) Head trunnion with head end lock (3) With double end lock. For these cases, use caution since the trunnion pin and fittings may be interfered with each other because the trunnion pin and port are very closed to each other.

2. Flange type (ø20 to ø32)

(1) Rod flange with rod end lock (2) Head flange with head end lock (3) With double end lock. For these cases, use caution since the bolt for mounting a cylinder and fittings may be interfered with each other.

Refer to "Special Port Location" in "Made to Order" on page 1756.



CJ1
CJP
CJ2
JCM
CM2
CM3
CG1
CG3
JMB
MB
MB1
CA2
CS1
CS2


D-□
-X□
Technical Data

CBM2 Series

With Air Cushion (For dimensions other than shown below, refer to pages 256 and 257.)

Basic

Head end lock: **CBM2B** Bore size – Stroke A-HN

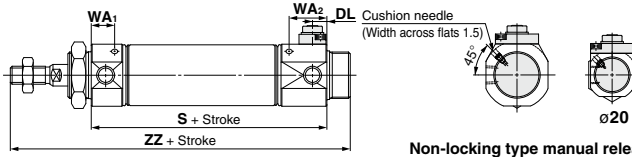


Non-locking type manual release: Suffix N


With Air Cushion

Bore size (mm)	S			WA1			WA2			ZZ			DL
	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	
20	72	73	83	13	24	24	23	13	23	126	127	137	8
25	72	73	83	13	24	24	23	13	23	130	131	141	8
32	72	75	83	13	24	24	21	13	21	130	133	141	8
40	93	96	101	16	24	24	21	16	21	159	162	167	11

Axial foot: **CBM2L** Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*




Rod flange: **CBM2F** Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*




Head flange:


CBM2G Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*



Single clevis: **CBM2C** Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*

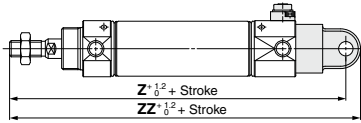


Double clevis: **CBM2D** Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*

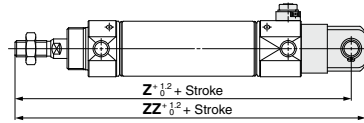


Rod trunnion:

CBM2U Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*



Head trunnion:

CBM2T Bore size – Stroke A ^{-H} ^N _{-R} _L ^{-W}*



* The bracket is shipped together.

Bore size (mm)	Axial foot									Head flange		
	LS			ZZ			Z					
	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock
20	112	113	123	141	142	152	117	118	128			
25	112	113	123	145	146	156	121	122	132			
32	112	115	123	145	148	156	121	124	132			
40	139	142	147	176	179	184	148	151	156			


Bore size (mm)	Clevis						Head trunnion					
	Z			ZZ			Z			ZZ		
	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock	Head end lock	Rod end lock	Double end lock
20	143	144	154	152	153	163	118	119	129	128	129	139
25	147	148	158	156	157	167	122	123	133	132	133	143
32	147	150	158	156	159	167	122	125	133	132	135	143
40	182	185	190	193	196	201	148.5	151.5	156.5	159	162	167

CM2 Series Auto Switch Mounting

Auto Switch Proper Mounting Position (Detection at stroke end) and Its Mounting Height


Solid state auto switch

- D-M9□
- D-M9□W
- D-M9□A




(): Values for D-M9□A
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

- D-M9□V
- D-M9□WV
- D-M9□AV




(): Values for D-M9□AV
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.


D-H7□/H7□W/H7NF/H7BA/H7C



D-G5NT




D-G39A/K39A




Reed auto switch

- D-A9□




(): Values for D-A96
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

- D-A9□V




A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.


D-C7/C8/C73C/C80C




D-B5/B6/B59W



D-A33A/A34A



D-A44A



Auto Switch Proper Mounting Position (Detection at stroke end) and Its Mounting Height

Auto Switch Proper Mounting Position

(Standard type (except single acting type), Non-rotating rod type, Direct mount type, Direct mount, Non-rotating rod type (except single acting type)) (mm)

Auto switch model	D-M9□(V) D-M9□W(V) D-M9□A(V)		D-A9□(V)		D-G39A D-K39A D-A3□A D-A44A		D-H7□ D-H7C D-H7□W D-H7BA D-H7NF		D-G5NT		D-C7/C8 D-C73C D-C80C		D-B5□ D-B64		D-B59W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	11	9.5	7	5.5	1	0	6.5	5	3	1.5	7.5	6	1.5	0	4	3
25	10	10	6	6	0	0	5.5	5.5	2	2	6.5	6.5	0.5	0.5	3.5	3.5
32	11.5	10.5	7.5	6.5	1.5	0.5	7	6	3.5	2.5	8	7	2	1	5	4
40	17.5	15.5	13.5	11.5	7.5	5.5	13	11	9.5	7.5	14	12	8	6	11	9

Note) Adjust the auto switch after confirming the operating condition in the actual setting.

Auto Switch Proper Mounting Position (Centralized piping type, With end lock)

- CG1
- CJP
- CJ2
- JCM
- CM2
- CM3
- CG1
- CG3
- JMB
- MB
- MB1
- CA2
- CS1
- CS2

(mm)

Auto switch model	D-M9□(V) D-M9□W(V) D-M9□A(V)		D-A9□(V)		D-G39A D-K39A D-A3□A D-A44A		D-H7□ D-H7C D-H7□W D-H7BA D-H7NF		D-G5NT		D-B5□ D-B64		D-C7□ D-C80 D-C73C D-C80C		D-B59W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	10.5 (8)	9.5 (7)	6.5 (4)	5.5 (3)	0.5 (—)	0 (—)	6 (4)	5 (3)	2.5 (0.5)	1.5 (0)	1 (—)	0 (—)	7 (5)	6 (4)	4 (2)	3 (1)
25	10.5 (8)	9.5 (7)	6.5 (4)	5.5 (3)	0.5 (—)	0 (—)	6 (4)	5 (3)	2.5 (0.5)	1.5 (0)	1 (—)	0 (—)	7 (5)	6 (4)	4 (2)	3 (1)
32	11.5 (9)	10.5 (8)	7.5 (5)	6.5 (4)	1.5 (0)	0.5 (0)	7 (5)	6 (4)	3.5 (1.5)	2.5 (0.5)	2 (0)	1 (0)	8 (6)	7 (5)	5 (3)	4 (2)
40	17.5	15.5	13.5	11.5	6.5	5.5	12	11	8.5	7.5	7	6	13	12	10	9

* () : Setting position for the auto switch with an air cushion.

The D-B5/B6/A3□A/A44A/G39A/K39A cannot be mounted on the bore size ø20 and ø25 cylinder with an air cushion.

Note 1) Adjust the auto switch after confirming the operating condition in the actual setting.

Note 2) The D-A3□A/A44A/G39A/K39A cannot be mounted on the centralized piping type CDM2□P series.

Auto Switch Mounting Height

(mm)

Auto switch model	D-A9□(V) D-M9□(V) D-M9□W(V) D-M9□A(V)		D-B5□ D-B64 D-B59W D-G5NT D-H7C		D-C73C D-C80C		D-G39A D-K39A D-A3□A		D-A44A	
	Hs	Hs	Hs	Hs	Hs	Hs				
20	24.5	25.5	25	60	69.5					
25	27	28	27.5	62.5	72					
32	30.5	31.5	31	66	75.5					
40	34.5	35.5	35	70	79.5					

- D-□
- X□
- Technical Data

CM2 Series

Auto Switch Proper Mounting Position (Detection at stroke end) Single Acting/Spring Return Type (S), Spring Extend Type (T)

Standard Type/Spring Return Type (S)

Non-rotating Rod Type/Spring Return Type (S)

(mm)

Auto switch model	Bore size	A dimensions					B
		Up to 50 st	51 to 100 st	101 to 150 st	151 to 200 st	201 to 250 st	
D-M9□(V) D-M9□W(V) D-M9□A(V)	20	36	61	86	—	—	9.5
	25	35	60	85	—	—	10
	32	36.5	61.5	86.5	111.5	—	10.5
	40	42.5	67.5	92.5	117.5	142.5	15.5
D-A9□(V)	20	32	57	82	—	—	5.5
	25	31	56	81	—	—	6
	32	32.5	57.5	82.5	107.5	—	6.5
	40	38.5	63.5	88.5	113.5	138.5	11.5
D-H7□ D-H7C D-H7□W D-H7BA D-H7NF	20	31.5	56.5	81.5	—	—	5
	25	30.5	55.5	80.5	—	—	5.5
	32	32	57	82	107	—	6
	40	38	63	88	113	138	11
D-G5NT	20	28	53	78	—	—	1.5
	25	27	52	77	—	—	2
	32	28.5	53.5	78.5	103.5	—	2.5
	40	34.5	59.5	84.5	109.5	134.5	7.5
D-B5□ D-B64	20	26.5	51.5	76.5	—	—	0
	25	25.5	50.5	75.5	—	—	0.5
	32	27	52	77	102	—	1
	40	33	58	83	108	133	6
D-C7□ D-C80 D-C73C D-C80C	20	32.5	57.5	82.5	—	—	6
	25	31.5	56.5	81.5	—	—	6.5
	32	33	58	83	108	—	7
	40	39	64	89	114	139	12
D-B59W	20	29	54	79	—	—	2.5
	25	28.5	53.5	78.5	—	—	3.5
	32	30	55	80	105	—	4
	40	36	61	86	111	136	9
D-G39A D-K39A D-A3□A D-A44A	20	26	51	76	—	—	0
	25	25	50	75	—	—	0
	32	26.5	51.5	76.5	101.5	—	0.5
	40	32.5	57.5	82.5	107.5	132.5	5.5

Note) Adjust the auto switch after confirming the operating condition in the actual setting.

Standard Type/Spring Extend Type (T)

Non-rotating Rod Type/Spring Extend Type (T)

(mm)

Auto switch model	Bore size	A	B dimensions				
			Up to 50 st	51 to 100 st	101 to 150 st	151 to 200 st	201 to 250 st
D-M9□(V) D-M9□W(V) D-M9□A(V)	20	11	34.5	59.5	84.5	—	—
	25	10	35	60	85	—	—
	32	11.5	35.5	60.5	85.5	110.5	—
	40	17.5	40.5	65.5	90.5	115.5	140.5
D-A9□(V)	20	7	30.5	55.5	80.5	—	—
	25	6	31	56	81	—	—
	32	7.5	31.5	56.5	81.5	106.5	—
	40	13.5	36.5	61.5	86.5	111.5	136.5
D-H7□ D-H7C D-H7□W D-H7BA D-H7NF	20	6.5	30	55	80	—	—
	25	5.5	30.5	55.5	80.5	—	—
	32	7	31	56	81	106	—
	40	13	36	61	86	111	136
D-G5NT	20	3	26.5	51.5	76.5	—	—
	25	2	27	52	77	—	—
	32	3.5	27.5	52.5	77.5	102.5	—
	40	9.5	32.5	57.5	81.5	107.5	132.5
D-B5□ D-B64	20	1.5	25	50	75	—	—
	25	0.5	25.5	50.5	75.5	—	—
	32	2	26	51	76	101	—
	40	8	31	56	81	106	131
D-C7□ D-C80 D-C73C D-C80C	20	7.5	31	56	81	—	—
	25	6.5	31.5	56.5	81.5	—	—
	32	8	32	57	82	107	—
	40	14	37	62	87	112	137
D-B59W	20	4	28	53	78	—	—
	25	3.5	28.5	53.5	78.5	—	—
	32	5	29	54	79	104	—
	40	11	34	59	84	109	134
D-G39A D-K39A D-A3□A D-A44A	20	1	24.5	49.5	74.5	—	—
	25	0	25	50	75	—	—
	32	1.5	25.5	50.5	75.5	100.5	—
	40	7.5	30.5	55.5	80.5	105.5	130.5

Note) Adjust the auto switch after confirming the operating condition in the actual setting.

Minimum Stroke for Auto Switch Mounting

(Standard type (except single acting type), Non-rotating rod type, Direct mount type,

Direct mount, Non-rotating rod type (except single acting type), Centralized piping type, With end lock)



n: Number of auto switches (mm)

Auto switch model	Number of auto switches				
	With 1 pc.	With 2 pcs.		With n pcs.	
		Different surfaces	Same surface	Different surfaces	Same surface
D-M9□	5	15 <small>Note 1)</small>	40 <small>Note 1)</small>	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$55 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□W	10	15 <small>Note 1)</small>	40 <small>Note 1)</small>	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$55 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□A	10	15 <small>Note 1)</small>	40 <small>Note 1)</small>	$25 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$60 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-A9□	5	15	30 <small>Note 1)</small>	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$50 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□V	5	15 <small>Note 1)</small>	35	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$35 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-A9□V	5	15	25	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$25 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□WV D-M9□AV	10	15 <small>Note 1)</small>	35	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$35 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-C7□ D-C80	10	15	50	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$50 + 45 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-H7□ D-H7□W D-H7BA D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$60 + 45 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-H7C D-C73C D-C80C	10	15	65	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$65 + 50 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-G5NT D-B5□/B64	10	15	75	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$75 + 55 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-B59W	15	20	75	$20 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)<small>Note 3)</small></small>	$75 + 55 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-G39A <small>Note 4)</small> D-K39A D-A3□A D-A44A	10	35	100	$35 + 30 (n-2)$ <small>(n = 2, 4, 6...)</small>	$100 + 100 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>

Note 3) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 4) The D-A3□A/A44A/G39A/K39A cannot be mounted on the centralized piping type CDM2□P series.

Note 1) Auto switch mounting

Auto switch model	With 2 auto switches	
	Different surfaces	Same surface
	 <p>The proper auto switch mounting position is 3.5 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-M9□(V) D-M9□W(V)	15 to 20 stroke <small>Note 2)</small>	40 to 55 stroke <small>Note 2)</small>
D-M9□A(V)	15 to 25 stroke <small>Note 2)</small>	40 to 60 stroke <small>Note 2)</small>
D-A9□(V)	—	30 to 50 stroke <small>Note 2)</small>

Note 2) Minimum stroke for auto switch mounting in types other than those in Note 1.

CJ1

CJP

CJ2

JCM

CM2

CM3

CG1

CG3

JMB

MB

MB1

CA2

CS1

CS2

D-□

-X□

Technical Data

Operating Range

Auto switch model	Bore size (mm)			
	20	25	32	40
D-A9□(V)	6	6	6	6
D-M9□(V) D-M9□W(V) D-M9□A(V)	3	3	4	3.5
D-C7□/C80 D-C73C/C80C	7	8	8	8
D-B5□/B64 D-A3□A/A44A (Note)	8	8	9	9
D-B59W	12	12	13	13
D-H7□/H7□W/H7BA D-G5NT/H7NF	4	4	4.5	5
D-H7C	7	8.5	9	10
D-G39A/K39A (Note)	8	9	9	9

* Values which include hysteresis are for guideline purposes only, they are not a guarantee (assuming approximately ±30% dispersion) and may change substantially depending on the ambient environment.

Note) The D-A3□A/A44A/G39A/K39A cannot be mounted on the centralized piping type CDM2□P series.

Auto Switch Mounting Brackets/Part No.

Auto switch model	Bore size (mm)			
	ø20	ø25	ø32	ø40
D-M9□(V) D-M9□W(V) D-A9□(V)	BM5-020 (A set of a, b, c, d)	BM5-025 (A set of a, b, c, d)	BM5-032 (A set of a, b, c, d)	BM5-040 (A set of a, b, c, d)
D-M9□A(V) (Note 2)	BM5-020S (A set of b, c, d, e)	BM5-025S (A set of b, c, d, e)	BM5-032S (A set of b, c, d, e)	BM5-040S (A set of b, c, d, e)

D-H7□ D-H7□W D-H7NF D-C7□/C80 D-C73C/C80C	BM2-020A (A set of band and screw)	BM2-025A (A set of band and screw)	BM2-032A (A set of band and screw)	BM2-040A (A set of band and screw)
D-H7BA	BM2-020AS (A set of band and screw)	BM2-025AS (A set of band and screw)	BM2-032AS (A set of band and screw)	BM2-040AS (A set of band and screw)
D-B5□/B64 D-B59W D-G5NT	BA2-020 (A set of band and screw)	BA2-025 (A set of band and screw)	BA2-032 (A set of band and screw)	BA2-040 (A set of band and screw)
D-A3□A/A44A (Note 3) D-G39A/K39A	BM3-020 (A set of band and screw)	BM3-025 (A set of band and screw)	BM3-032 (A set of band and screw)	BM3-040 (A set of band and screw)

Note 1) Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please contact SMC regarding other chemicals.

Note 2) As the indicator LED is projected from the switch unit, indicator LED may be damaged if the switch bracket is fixed on the indicator LED.

Note 3) The D-A3□A/A44A/G39A/K39A cannot be mounted on the centralized piping type CDM2□P series.

Band Mounting Brackets Set Part No.

Set part no.	Contents
BM2-□□□A(S) * S: Stainless steel screw	<ul style="list-style-type: none"> Auto switch mounting band (c) Auto switch mounting screw (d)
BJ4-1	<ul style="list-style-type: none"> Switch bracket (White/PBT) (e) Switch holder (b)
BJ5-1	<ul style="list-style-type: none"> Switch bracket (Transparent/Nylon) (a) Switch holder (b)

Other than the applicable auto switches listed in "How to Order", the following auto switches are mountable.

Refer to pages 1575 to 1701 for the detailed specifications.

Type	Model	Electrical entry	Features
Solid state	D-H7A1, H7A2, H7B	Grommet (In-line)	—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color indicator)
	D-H7BA		Water resistant (2-color indicator)
	D-G5NT		With timer
Reed	D-B53, C73, C76	Grommet (In-line)	—
	D-C80		Without indicator light

* With pre-wired connector is also available for solid state auto switches. For details, refer to pages 1648 and 1649.

* Normally closed (NC = b contact) solid state auto switches (D-M9□E(V)) are also available. For details, refer to page 1592-1.



1 PTFE Grease

Symbol
-X446

Applicable Series

Description	Model	Action	Note
Standard type	CM2	Double acting, Single rod	
	CM2W	Double acting, Double rod	
Non-rotating rod type	CM2K	Double acting, Single rod	
	CM2KW	Double acting, Double rod	
Direct mount type	CM2R	Double acting, Single rod	
Direct mount, Non-rotating rod type	CM2RK	Double acting, Single rod	

How to Order

Standard model no. - X446
↓
 PTFE grease

Specifications: Same as standard type

Dimensions: Same as standard type

* When grease is necessary for maintenance, grease pack is available, please order it separately.
GR-F-005 (Grease: 5 g)

Warning Precautions

Be aware that smoking cigarettes etc after your hands have come into contact with the grease used in this cylinder can create a gas that is hazardous to humans.

- CJ1**
- CJP**
- CJ2**
- JCM**
- CM2**
- CM3**
- CG1**
- CG3**
- JMB**
- MB**
- MB1**
- CA2**
- CS1**
- CS2**

- D-□**
- X□**
- Technical Data