

Line Filter

FH34/44/54/64 Series

Rated Pressure: 3.5, 7, 14, 21 MPa

RoHS

Compact, solid, and safe design

The case and cover have undergone testing in which they were subjected 100,000 times to impacts equivalent 1.5 times the rated pressure (confirming to MIL standard).

Easy element replacement

The element is extracted from the top, and secured in place by inserting an O-ring seal. The element can be installed and removed easily, simplifying maintenance.

Reliable outlet side

A firm seal is secured through a special configuration combining a pressure clamp from an O-ring around the inner perimeter of the case with support from the cover, and there is no resistance when the cover is installed and removed.

Large drain exhaust port

The large M24 drain exhaust port assures rapid drainage.

Easy fluid flow direction reversal

Simply turn the cover 180° relative to the case mounting base to reverse the fluid flow direction.

Clogging sensor

The filter can be mounted with a differential pressure indicator (reset type) or differential pressure indication switch (common with visual, non-reset type).



Specifications

Fluid		Hydraulic fluid	
Operating pressure		Max. 3.5 MPa	Max. 7, 14, 21 MPa
Operating temperature		Max. 80°C	
Main material	Cover/Case ^{Note 1)}	Aluminum die-cast (3/8, 1/2, 3/4, 1)	Cast iron
		Aluminum casted (1 1/4, 1 1/2, 2)	
Element	O-ring	NBR or FKM ^{Note 2)}	
	Material	Paper	
	Nominal filtration	5, 10, 20 μm	
	Differential pressure resistance	0.6 MPa	
Differential pressure indicator operating pressure (Element replacement differential pressure)		0.275 MPa	
Relief valve open pressure		0.35 MPa	

Note 1) There may be scratches, discoloration, slight paint peeling, or other defects which do not affect the product's function or performance.

Note 2) The material of the O-rings and seals differs depending on the hydraulic fluid used. Petroleum, Water-glycol, Emulsion: NBR; Phosphoric ester: FKM

Model/Rated Flow Rate

Operating pressure	Model		Port size		Rated flow rate (L/min)
	Threaded connection	Flange connection	Threaded Rc	Flange SSA	
Max. 3.5 MPa	FH340-03	—	3/8	—	10
	FH340-04	—	1/2	—	20
	FH342-06	—	3/4	20 (3/4 ^B)	50
	FH342-08	—	1	25 (1 ^B)	80
	FH340-10	FH341-10	1 1/4	32 (1 1/4 ^B)	120
	FH340-12	FH341-12	1 1/2	40 (1 1/2 ^B)	160
	—	FH341-16	—	50 (2 ^B)	260
	—	FH341-20	—	65 (2 1/2 ^B)	450
Max. 7 MPa	FH440-03	—	3/8	—	10
	FH440-04	FH441-04	1/2	15 (1/2 ^B)	20
	FH440-06	FH441-06	3/4	20 (3/4 ^B)	50
	FH440-08	FH441-08	1	25 (1 ^B)	80
	FH440-10	FH441-10	1 1/4	32 (1 1/4 ^B)	120
	FH440-12	FH441-12	1 1/2	40 (1 1/2 ^B)	160
	—	FH441-16	—	50 (2 ^B)	260
	—	FH441-20	—	65 (2 1/2 ^B)	450
Max. 14 MPa	FH540-03	—	3/8	—	10
	FH540-04	FH541-04	1/2	15 (1/2 ^B)	20
	FH540-06	FH541-06	3/4	20 (3/4 ^B)	50
	FH540-08	FH541-08	1	25 (1 ^B)	80
	FH540-10	FH541-10	1 1/4	32 (1 1/4 ^B)	120
	FH540-12	FH541-12	1 1/2	40 (1 1/2 ^B)	160
	—	FH541-16	—	50 (2 ^B)	260
	—	FH541-20	—	65 (2 1/2 ^B)	450
Max. 21 MPa	FH640-03	—	3/8	—	10
	FH640-04	FH641-04	1/2	15 (1/2 ^B)	20
	FH640-06	FH641-06	3/4	20 (3/4 ^B)	50
	FH640-08	FH641-08	1	25 (1 ^B)	80
	FH640-10	FH641-10	1 1/4	32 (1 1/4 ^B)	120
	FH640-12	FH641-12	1 1/2	40 (1 1/2 ^B)	160
	—	FH641-16	—	50 (2 ^B)	260
	—	FH641-20	—	65 (2 1/2 ^B)	450

Note) Tapered female thread connection conforming to JIS B 0203 is compatible.

Flanges conforming to JIS B 2291 (21 MPa piping flanges for hydraulic use) SSA are compatible.

Accessory/Option

Description	Part no.	Model	Note
Differential pressure indicator	CB-48H	FH34 ⁰ to FH44 ⁰	Petroleum, Water-glycol, Emulsion
	CB-48H-V	FH44 ⁰	Phosphoric ester
	CB-52H	FH342	Petroleum, Water-glycol, Emulsion
	CB-52H-V	FH342	Phosphoric ester
	CB-64H	FH54 ⁰ to FH64 ⁰	Petroleum, Water-glycol, Emulsion
	CB-64H-V	FH64 ⁰	Phosphoric ester
Differential pressure indication switch (N.C. and N.O. common)	CB-49H	FH34 ⁰ to FH44 ⁰	Petroleum, Water-glycol, Emulsion
	CB-49H-V	FH44 ⁰	Phosphoric ester
	CB-53H	FH342	Petroleum, Water-glycol, Emulsion
	CB-53H-V	FH342	Phosphoric ester
	CB-65H	FH54 ⁰ to FH64 ⁰	Petroleum, Water-glycol, Emulsion
	CB-65H-V	FH64 ⁰	Phosphoric ester
Blanking cap (for differential pressure indication part)	AG-9H	FH34 ⁰ to FH64 ⁰	Petroleum
	AG-9H-W	FH34 ⁰ to FH64 ⁰	Water-glycol, Emulsion
	AG-9H-V	FH64 ⁰	Phosphoric ester
	AG-12H	FH342	Petroleum
	AG-12H-W	FH342	Water-glycol, Emulsion
	AG-12H-V	FH342	Phosphoric ester

How to Order

FH 3 40 - 03 - 0 0 0 - P 005 L

Hydraulic filter

Operating pressure (Max.)

3	3.5 MPa
4	7 MPa
5	14 MPa
6	21 MPa

Construction/Connection

40	Element upward removal	Threaded
42*	Element upward removal	Flange

* Indicates 42 for 3.5 MPa, Port sizes 3/4 and 1.

Port size

Symbol	Threaded Rc	Flange SSA
03	3/8	—
04	1/2	15 (1/2 ^B)
06	3/4	20 (3/4 ^B)
08	1	25 (1 ^B)
10	1 1/4	32 (1 1/4 ^B)
12	1 1/2	40 (1 1/2 ^B)
16	—	50 (2 ^B)
20	—	65 (2 1/2 ^B)
24	—	80 (3 ^B)

Note) For selection from thread and flange, refer to "Model/Rated Flow Rate" on page 510.

Differential pressure indication

0	None
1	Differential pressure indicator
2	Differential pressure indication switch <small>Note)</small>
4*	Differential pressure indicator
5*	Differential pressure indication switch <small>Note)</small>

Note) N.C. and N.O. common
* Construction 42 only

Relief valve

0	With relief valve
1	None

Nominal filtration

005	5 μm
010	10 μm
020	20 μm

Note) The paper elements for water-glycol or emulsion is 10 μm only.

Hydraulic fluid

0	Petroleum	N
1	Water-glycol, Emulsion	W
2	Phosphoric ester	V

Note) N, W and V refer to the hydraulic fluid symbol indicated at the end of the element part number.

Made to Order

Nil	None (Standard)
X0	Micromesh element equipped

Note) [Click here for details](#)

Fluid direction

Nil	IN left
L	IN right

Element

P	Paper
M*	Micromesh

* The micromesh element is a made to order specification (X0).

Replacement Element Part No. (Including O-ring for element)

Port size	5 μm	10 μm	20 μm	Element size
03 (3/8 ^B), 04 (1/2 ^B)	EP910-005N	EP910-010N	EP910-020N	ø55 x 90
06 (3/4 ^B), 08 (1 ^B)	EP020-005N	EP020-010N	EP020-020N	ø74 x 117
10 (1 1/4 ^B), 12 (1 1/2 ^B)	EP120-005N	EP120-010N	EP120-020N	ø74 x 195
16 (2 ^B)	EP220-005N	EP220-010N	EP220-020N	ø88 x 282
20 (2 1/2 ^B), 24 (3 ^B)	EP820-005N	EP820-010N	EP820-020N	ø119 x 280


Note 1) The symbol at the end of the element part no. indicates the hydraulic fluid type.

N: Petroleum, V: Phosphoric ester, W: Water-glycol, Emulsion (10 μm only)

Note 2) Refer to page 528 for micromesh elements.

Note 3) Above elements require one element per filter.

Construction/Seal List

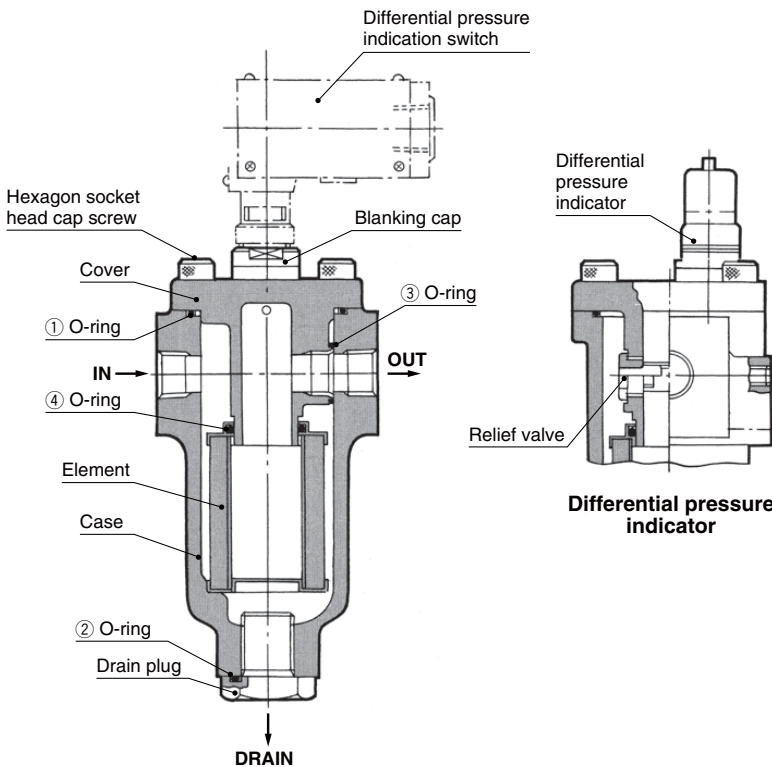

Replacement O-ring/Seal List (One each of the seal and O-ring types listed below are required per filter.)


Applicable hydraulic fluid	Port size	Applicable hydraulic fluid	Material	① O-ring order no. (Nominal size)	② O-ring order no. (Nominal size)	③ O-ring order no. (Nominal size)	④ O-ring order no. (Nominal size)				
Petroleum, Water-glycol, Emulsion	FH340 03 to 04	NBR-90	NBR-90	KA00617 (G80)	KA00630	KA00468 (P22A)	KA00471 (P30)				
	FH34□ 06 to 08			KA00611 (G105)		KA00079 (P32)	KA00082 (P44)				
	FH44□ to 64□ 03 to 04			KA00615 (G65)		KA00074 (P20)	KA00471 (P30)				
	FH44□ to 64□ 06 to 08			KA00618		KA00079 (P32)	KA00082 (P44)				
	FH34□ to 64□ 10 to 12			(G90)		KA00803 (P40)	(P44)				
	FH341 to 641 16			KA00611 (G105)		KA00806 (P50)	KA00806 (P50)				
	FH441 20 to 24			KA00612M (G145)		KA00809 (P85)	KA00809 (P85)				
	Phosphoric ester			FH340 03 to 04		FKM-90	FKM-90	KA01296M (G80)	KA00631M	KA00713 (P22A)	KA00104 (P30)
				FH34□ 06 to 08				KA02476 (G105)		KA00720 (P32)	KA00107 (P44)
				FH44□ to 64□ 03 to 04				KA01759 (G65)		KA00102 (P20)	KA00104 (P30)
FH44□ to 64□ 06 to 08		KA02477	KA00720 (P32)	KA00107 (P44)							
FH34□ to 64□ 10 to 12		(G90)	KA00722 (P40)	(P44)							
FH341 to 641 16		KA02476 (G105)	KA00636 (P50)	KA00636 (P50)							
FKM-70		FH441 20 to 24	FKM-70	FKM-70	KA01760 (G145)			KA00725 (P85)		KA00725 (P85)	

Note) The material and nominal size notations are based on JISB2401.

FH34/44/54/64 Series


Flow Rate Characteristics

FH34/44 Series

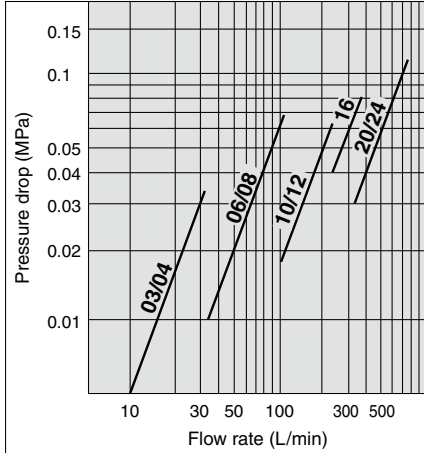


Conditions Fluid: Turbine oil Class 2 VG56
 Measured pressure: 3.5, 7 MPa
 Viscosity: 45 mm²/s
 Filter material: Paper
 Nominal filtration: 10 μm

FH54 Series

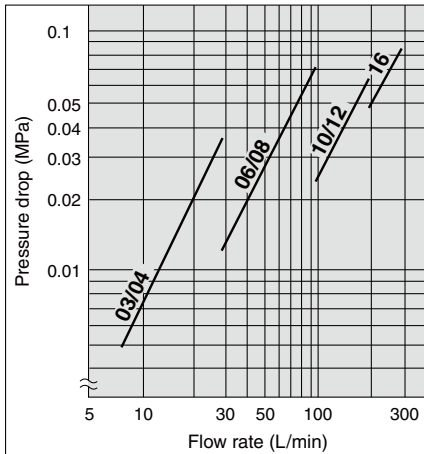

Conditions Fluid: Turbine oil Class 2 VG56
 Measured pressure: 14 MPa
 Viscosity: 45 mm²/s
 Filter material: Paper
 Nominal filtration: 10 μm

FH64 Series

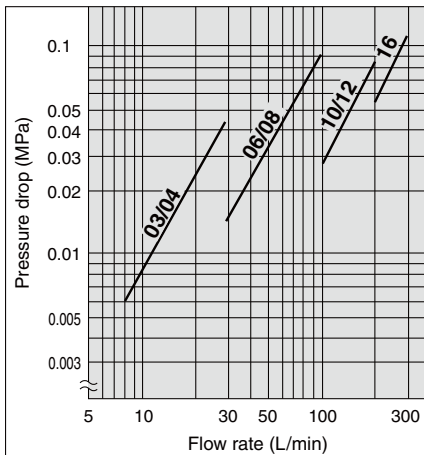


Conditions Fluid: Turbine oil Class 2 VG56
 Measured pressure: 21 MPa
 Viscosity: 45 mm²/s
 Filter material: Paper
 Nominal filtration: 10 μm

Differential Pressure Indication

Two indication methods are available: differential pressure indicator and differential pressure indication switch. These can be mounted on all filter models.


■ Differential pressure indicator

- Operating pressure—0.275 MPa
- Once a value is displayed, it will continue to be displayed until reset, even if the pump is stopped. (Reset type)
- Perform element replacement when the red ring floats up and covers the entire view port.

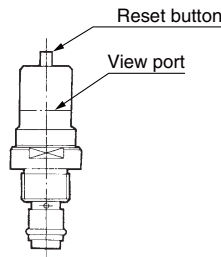

■ Differential pressure indication switch

- Operating pressure—0.275 MPa
- When a value has been displayed, it will be automatically reset when the pump is stopped. (Non-reset type)
- This is a visual dual-purpose. Perform element replacement when the switch has actuated (when the red ring floats up and covers the entire view port).
- N.C. and N.O. common

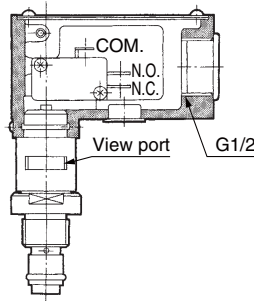

* Refer to page 529 for "Microswitch for differential pressure indication switch".

Handling Precautions

① Mounting

- Confirm INLET and OUTLET before mounting. Then connect so that the drain is oriented downward. For maintenance, make sure to provide sufficient space above the filter for removing the element.

② Operation

- The hydraulic fluid used becomes high viscosity when the temperature is low during the winter, etc., and the differential pressure indicator or the switch may activate. If this occurs, wait until the oil temperature rises by a warm-up operation, then check if this is caused by clogging.
- Once the differential pressure indicator is actuated, the indication continues to be displayed until the indicator is reset (by depressing the reset button), even if the pump stops operating. Reset after replacing the element and restarting operation, or after normal operation starts in cold weather such as during winter.
- When using a differential pressure indication switch and if a filter clogged signal is incorporated into the sequence circuit of the machine, make sure to design the system so the filter clogged signal does not operate until normal operation starts.

③ Element replacement

- When the pressure difference reaches 0.275 MPa during operation (actuating the differential pressure indicator), stop operation, drain the oil from the case, and replace the element.
- When replacing the element, check the O-rings and replace them if they are damaged.
- When installing and removing an element, do not scratch or damage it by touching the corners of the case, etc.

④ Others

- For the top cover O-ring, use a product of hardness 90 to prevent leaks or damage.
- If there is back pressure, install a check valve on the outlet side to prevent damage to the element.
- Turn the top cover 180° to reverse the oil flow direction.
- Use an auxiliary pipe or the like and apply force evenly when tightening the hexagon socket head cap screws on the cover and case.

