

# Compact Cylinder

## CQS Series

ø12, ø16, ø20, ø25

**Ideal for machine designs with small space requirements**

The "D-M9" auto switch will not protrude from switch mounting groove.

**Square body shape gives you flexibility for designing machine.**

Cross-section of a cylinder tube is the same configuration regardless of w/ switch or w/o switch.

**Auto switch mounting allows for flexible designing requirements**

3 faces on ø12, ø16, and all 4 faces including port side on ø20, ø25.


**2 way basic mounting: Through-hole or both ends tapped**

Basic mounting is 2 way. You can choose either through-hole or both ends tapped mounting.

**Non-rotating accuracy  
Non-rotating rod**

Hexagonal cross sectional shape piston rod for high non-rotation accuracy.

ø12, ø16 — ±1°  
ø20, ø25 — ±0.7°

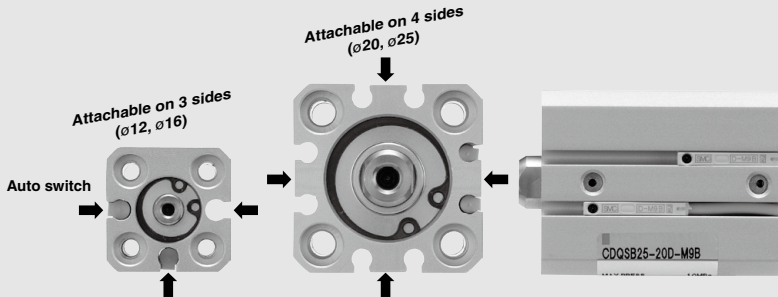


			Bore size (mm)	Stroke (mm)	Page	
<b>Standard</b> 	Double acting	Single rod CQS	12, 16 20, 25	Standard stroke ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	797	
		Double rod CQSW				Long stroke ø12 } 35, 40, 45, 50, 75, 100 ø16 } 125, 150, 175, 200 ø20 } 75, 100, 125, 150, 175, 200 ø25 } 75, 100, 125, 150, 175, 200, 250, 300
	Single acting	Return/Extend CQS		ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	810	
	<b>Non-rotating Rod</b> 	Double acting		Single rod CQSK	ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	818
Double rod CQSKW				828		
<b>Anti-lateral Load</b> 		Double acting		Single rod CQS□S	ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	836
				844		
<b>Smooth cylinder (Low friction) CQSY</b> 	Refer to the Web Catalog.					
<b>Low-speed cylinder CQSX</b> 	Refer to the Web Catalog.					

Reduction of  
installation  
space


## Added compact type foot brackets.

- Compact foot bracket has the same width as the cylinder.  
Overall width reduced by up to **43%** (for  $\phi 12$ )

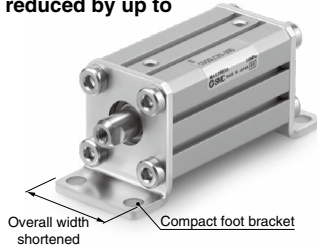

### ■ More compact installation space possible


- Short pitch mounting is possible.
- Allows installation close against a wall.

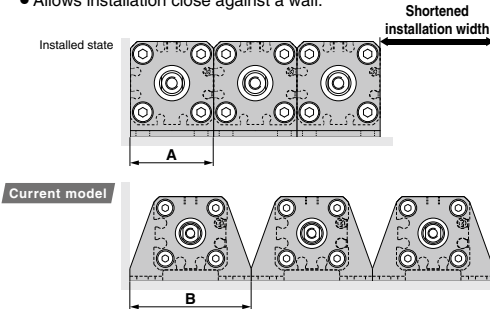

Bore size (mm)	Compact foot type width A (mm)	Current foot type width B (mm)	Reduced width for short pitch mounting (mm)		
			1 unit	2 units	3 units
12	25	44	19	38	57
16	29	48	19	38	57
20	36	62	26	52	78
25	40	66	26	52	78

\* Short pitch mounting is possible only without auto switch.  
Consult with SMC for mounting with auto switch.

### ■ Height from the bottom of brackets to the center of a cylinder is the same as the current model.

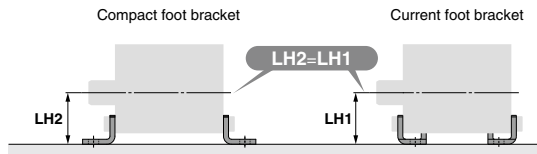


Applicable cylinders: C(D)QS, C(D)QSW, C(D)QS (Single acting, return/extend), C(D)QSK, C(D)QSKW (Non-rotating), C(D)QS□S (Anti-lateral load)

Reduction  
in labor  
for design


### Added pivot brackets for double clevis.

■Rotating angle: Max. 100°

(For  $\phi 12$ ,  $\phi 16$ )

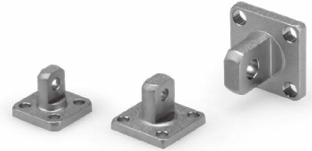

- Time to design rotating bracket saved.
- Improved amount of mounting freedom
- Can be mounted to an installed double clevis cylinder.

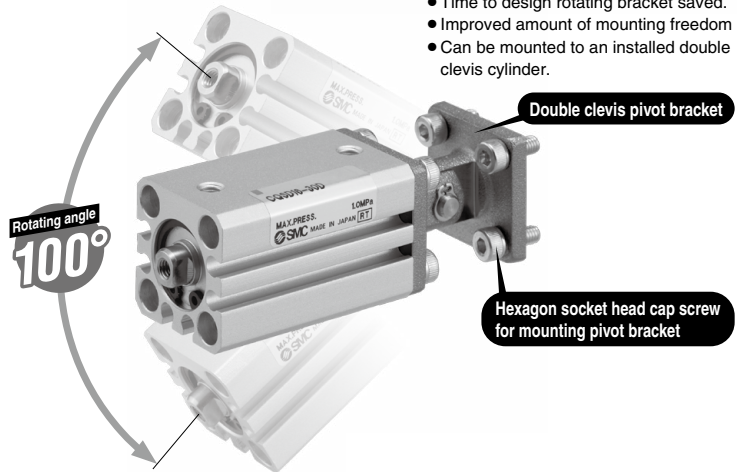

Applicable cylinders: CQS (Bore size  $\phi 12$  to  $\phi 25$ , Mounting bracket, Applicable only to double clevis.)

# Combinations of Standard Products and Made

## CQS Series

- : Standard
- : Made to Order specifications
- : Special product (Contact SMC for details.)
- : Not available

Symbol	Specification	Applicable bore size	CQS (Standard)				
			Double acting		Single acting		
			Single rod	Double rod	Single rod/ Extension	Single rod/ Retraction	
			ø12 to ø25				
<b>Standard</b>	Standard	ø12 to ø25	●	●	●	●	
<b>D</b>	Built-in magnet		●	●	●	●	
<b>CQS□-□M</b>	Rod end male thread		●	●	●	●	
<b>CQS□-□C</b>	With rubber bumper		●	●	○	○	
<b>CQS□-□F</b>	With boss on head end		●	—	●	●	
<b>CQS<sup>F</sup><sub>6</sub></b>	Foot, Flange		●	●	●	●	
<b>CQSD</b>	Double clevis type		●	—	●	●	
<b>10-, 11-</b>	Clean series		●	○	○	○	
<b>25A-</b>	Copper (Cu) and zinc (Zn)-free <sup>(5)</sup>		●	○	○	○	
<b>20-</b>	Copper <sup>(4)</sup> and Fluorine-free		●	●	●	●	
<b>CQS□M</b>	Cylinder with Stable Lubrication Function (Lube-retainer) <sup>(6)</sup>		ø20 to ø25	●	○	○	○
<b>XB6</b>	Heat-resistant cylinder (-10 to 150 °C)		ø12 to ø25	○	○	○	○
<b>XB7</b>	Cold-resistant cylinder (-40 to 70 °C)	○		○	○	○	
<b>XB9</b>	Low-speed cylinder (5 to 50 mm/s)	○		○	○	○	
<b>XB10</b>	Intermediate stroke (Using exclusive body)	○		○	○	○	
<b>XB13</b>	Low-speed cylinder (5 to 50 mm/s)	○		○	○	○	
<b>XC6</b>	Piston rod, retaining ring, rod end nut made of stainless steel	○		○	○	○	
<b>XC8</b>	Adjustable stroke cylinder/Adjustable extension type	○		—	○	○	
<b>XC9</b>	Adjustable stroke cylinder/Adjustable retraction type	○		—	○	○	
<b>XC10</b>	Dual stroke cylinder/Double rod type	○		—	○	○	
<b>XC11</b>	Dual stroke cylinder/Single rod type	○		—	○	○	
<b>XC36</b>	With boss on rod side	○		○	○	○	
<b>XC85</b>	Grease for food processing equipment	○		○	○	○	
<b>XC92</b>	Dust resistant cylinder	○		○	○	○	
<b>X235</b>	Change of piston rod end of double rod cylinder	—		○	—	—	
<b>X271</b>	Fluororubber seal	○		○	○	○	
<b>X525</b>	Long stroke of adjustable extension stroke cylinder (-XC8)	○		—	○	○	
<b>X526</b>	Long stroke of adjustable retraction stroke cylinder (-XC9)	○		—	○	○	
<b>X633</b>	Intermediate stroke of double rod type	—		○	—	—	
<b>X636</b>	Long stroke of dual stroke single rod	○		—	○	—	

Note 1) A rubber bumper comes as standard.  
 Note 2) For ø12 and ø16 only. (○) for ø20 and ø25.  
 Note 3) Refer to the **Web Catalog** for low-speed cylinders.

Note 4) Copper-free for the externally exposed part. For details, refer to the **Web Catalog**.  
 Note 5) For details, refer to the SMC website.  
 Note 6) Only the products with an auto switch and without rubber bumper are compatible.

# to Order Specifications

## CQS Series

CQSK (Non-rotating rod)		CQS (Long stroke)		CQS□S (Anti-lateral load)		CQSY Smooth cylinder (Low friction) <sup>(3)</sup>		CQSX Low-speed cylinder <sup>(3)</sup>	
Double acting		Double acting		Double acting		Double acting		Double acting	
Single rod	Double rod	Single rod	Single rod	Single rod	Single rod	Single rod	Single rod	Single rod	Single rod
ø12 to ø25									
●	●	●	●	●	●	●	●		
●	●	●	●	●	●	●	●		
●	●	●	●	●	●	●	●		
○	○	● <sup>(1)</sup>	● <sup>(1)</sup>	● <sup>(1)</sup>	● <sup>(1)</sup>	● <sup>(1)</sup>	●		
●	—	○	●	●	○	○	○		
●	●	●	●	●	●	●	●		
●	—	●	●	●	●	●	●		
○	○	○	○	○	—	—	●		
○	○	●	●	●	○	○	○		
○	○	●	●	●	—	—	—		
—	—	○	○	○	○	○	○		
○	○	○	○	○	—	—	—		
○	○	○	○	○	—	—	—		
○	○	◎	◎	◎	○	○	○		
○	○	○	○	○	—	—	—		
◎	◎	◎	◎	◎	○	○	○		
◎	—	○	○	○	○	○	○		
◎	—	○	○	○	○	○	○		
◎	—	○	○	○	○	○	○		
○	○	◎ <sup>(2)</sup>	◎ <sup>(2)</sup>	◎ <sup>(2)</sup>	◎ <sup>(2)</sup>	◎ <sup>(2)</sup>	◎ <sup>(2)</sup>		
○	○	◎	◎	◎	—	—	—		
—	—	○	○	○	—	—	—		
—	○	—	—	—	—	—	—		
○	○	◎	◎	◎	—	—	—		
○	—	○	○	○	○	○	○		
○	—	○	○	○	○	○	○		
—	◎	—	—	—	—	—	—		
○	—	○	○	○	○	○	○		



# CQS Series Specific Product Precautions

Be sure to read this before handling the products. Refer to page 20 for safety instructions and pages 21 to 30 for actuator and auto switch precautions.

## Operating Precautions

### Caution


- All loads to piston rod must be applied in axial direction only.
  - When a lateral load is applied unavoidably, ensure that it should not exceed the allowable lateral load to the rod end as specified in graph (1) to (5).
  - When installing a cylinder, centering should be required accurately.
  - Adoption of guide mechanism is strongly recommended for the case when CQS is used as stopper to prevent non-rotating piston rod from side loads.
- When a workpiece is secured to the end of the piston rod, ensure that the piston rod is retracted entirely, and place a wrench on the portion of the rod that protrudes beyond the section. Also, tighten by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.

## Retaining Ring Installation/Removal


### Caution

- For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
- Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.


## Allowable Lateral Load at Rod End




**Graph (1) Standard:  
Non-rotating Rod Type/Without Auto Switch**

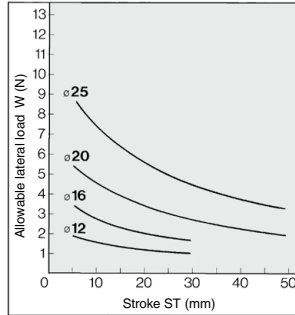


**Graph (2) Standard:  
Non-rotating Rod Type/With Auto Switch**

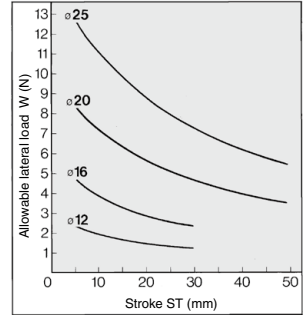


**Graph (3)  
Anti-lateral Load Type/Without Auto Switch**

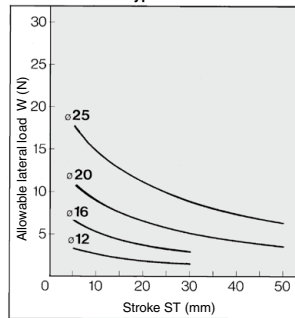

**Graph (4)  
Anti-lateral Load Type/With Auto Switch**

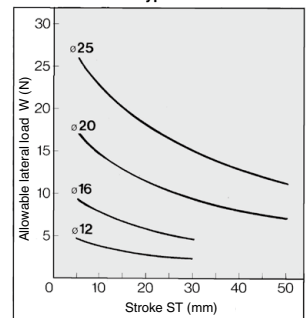

**Graph (5)  
Long Stroke/With & Without Auto Switch**

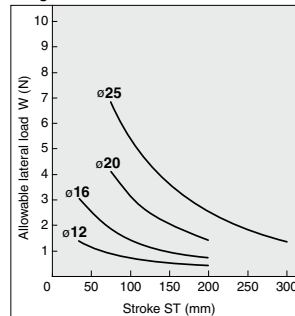

Note 1) Graph (1) to (5): Rod end female thread

Note 2) Lateral load allowance varies depending upon rod end shape dimensions or load value (distance to the center of the gravity of load). Please consult with SMC.

# Compact Cylinder: Standard Type

## Double Acting, Single Rod

# CQS Series

ø12, ø16, ø20, ø25

### How to Order

**With auto switch** CQDS B 20-30 D [ ] - [ ] - [ ] - [ ] - M9BW [ ] - [ ]

**With auto switch** (Built-in magnet)

**Mounting type**

B	Through-hole/Both ends tapped common (Standard)
L	Foot type
LC	Compact foot type
F	Rod side flange type
G	Head side flange type
D	Double clevis type

**Bore size**

12	12 mm
16	16 mm
20	20 mm
25	25 mm

**Number of auto switches**

NII	2 pcs.
S	1 pc.
n	*"n" pcs.

**Auto switch**

NII	Without auto switch
-----	---------------------

\* Refer to the table below for the applicable auto switch model.

**Body option**

**<Standard stroke>**

NII	Standard
C	With rubber bumper
M	Rod end male thread
F	Boss on head end

\* Combination of body options is available. CM, FC, FM, FCM

**<Long stroke>**

C	With rubber bumper Rod end female thread (Standard)
CM	With rubber bumper Rod end male thread

\* Rubber bumper is standard equipment for long stroke type.

**Action**

D	Double acting
---	---------------

**Cylinder stroke (mm)**

Bore size	Standard stroke	Long stroke
12, 16	5, 10, 15, 20, 25, 30	35, 40, 45, 50, 75, 100, 125, 150, 175, 200
20	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	75, 100, 125, 150, 175, 200, 250, 300
25		75, 100, 125, 150, 175, 200, 250, 300

For "Manufacture of Intermediate Strokes", refer to page 798.

**Built-in Magnet Cylinder Model**

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch. (Example) CDQSL25-30D

### Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load
					DC	AC	Perpendicular	In-line	0.5 (NII)	1 (M)	3 (L)	5 (Z)			
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)			M9PV	M9P	●	●	●	○			
				2-wire	M9BV		M9B	●	●	○	○	—			
				3-wire (NPN)	M9NWV		M9NW	●	●	●	○	○	IC circuit		
	Diagnostic indication (2-color indicator)			3-wire (PNP)	M9PWV		M9PW	●	●	○	○	○	—		
				2-wire	M9BWV		M9BW	●	●	○	○	○	—		
	Water resistant (2-color indicator)			3-wire (NPN)	M9NAV <sup>*1</sup>		M9NA <sup>*1</sup>	○	○	●	○	○	○	IC circuit	
				3-wire (PNP)	M9PAV <sup>*1</sup>		M9PA <sup>*1</sup>	○	○	●	○	○	○	—	
Magnetic field resistant (2-color indicator)	2-wire	M9BAV <sup>*1</sup>	M9BA <sup>*1</sup>	○	○	○	○	○	○	—					
	2-wire (Non-polar)	—	P3DWA <sup>**</sup>	●	—	●	●	○	○	—					
Reed auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
				2-wire			A93V <sup>**2</sup>	A93	●	●	●	●	—	—	Relay, PLC
				No	2-wire		A90V	A90	●	—	●	—	—	—	IC circuit

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... NII (Example) M9NW  
 1 m..... M (Example) M9NWM  
 3 m..... L (Example) M9NLW  
 5 m..... Z (Example) M9NZW

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
 \*\* Available only for ø25.

It is mounted away from the port side to avoid interference with fittings.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.


\* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□WV/M9□AV type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.




### Symbol

Without cushion



Rubber bumper



### Made to Order: Individual Specifications

(For details, refer to pages 854 to 856)

Symbol	Specifications
-X271	Fluororubber seals
-X525	Long stroke of adjustable extension stroke cylinder (-XC8)
-X526	Long stroke of adjustable retraction stroke cylinder (-XC9)
-X636	Long stroke of dual stroke single rod

### Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat-resistant cylinder (-10 to 150 °C) (without an auto switch)
-XB7	Cold-resistant cylinder (-40 to 70 °C) (without an auto switch)
-XB9	Low speed cylinder (10 to 50 mm/s)
-XB10	Intermediate stroke (Using exclusive body)
-XB13	Low speed cylinder (5 to 50 mm/s)
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type
-XC36	With boss in rod side
-XC85	Grease for food processing equipment
-XC92	Dust resistant cylinder

### Body Option

Description	Application
Rod end male thread	Available for all standard models of double acting, single rod.
Rubber bumper	

\* Rubber bumper is standard equipment for long stroke type.

### Moisture Control Tube IDK Series



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.

Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [Web Catalog](#).


## Specifications

Bore size (mm)		12	16	20	25
<b>Action</b>		Double acting, Single rod			
<b>Fluid</b>		Air			
<b>Lubrication</b>		Not required (Non-lube)			
<b>Proof pressure</b>		1.5 MPa			
<b>Maximum operating pressure</b>		1.0 MPa			
<b>Minimum operating pressure</b>		0.07 MPa		0.05 MPa	
<b>Ambient and fluid temperature</b>		Without auto switch: -10 to 70°C (No freezing)			
		With auto switch: -10 to 60°C (No freezing)			
<b>Cushion</b>		None, Rubber bumper*			
<b>Rod end thread</b>		Female thread			
<b>Stroke length tolerance</b>		Standard stroke: $^{+1.0}_0$ Long stroke: $^{+1.4*}_0$			
<b>Piston speed</b>		50 to 500 mm/s			
<b>Allowable kinetic energy (J)</b>	Standard type	0.022	0.038	0.055	0.09
	With rubber bumper	0.043	0.075	0.11	0.18

\* Stroke length tolerance does not include the deflection of the bumper.

\* Only rubber bumper is available for the long stroke type.

## Theoretical Output



Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT	113	34	57	79
16	8	IN	151	45	75	106
		OUT	201	60	101	141
20	10	IN	236	71	118	165
		OUT	314	94	157	220
25	12	IN	378	113	189	264
		OUT	491	147	245	344

## Manufacture of Intermediate Stroke

Description		Spacer is installed in the standard stroke body.		Exclusive body (-XB10)		
Part no.		Refer to "How to Order" for the standard model no. (page 797).		Suffix "-XB10" to the end of standard model no. (page 797).		
Standard stroke	Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.		Dealing with the stroke in 1 mm increments by using an exclusive body with the specified stroke.		
	Stroke range	Bore size	Stroke range	Bore size	Stroke range	
		12, 16	1 to 29	12, 16	6 to 29	
Long stroke	Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.		Dealing with the stroke in 1 mm increments by using an exclusive body with the specified stroke.		
		Bore size	Stroke range	Bore size	Stroke range	
	Stroke range	12, 16	31 to 199	12, 16	31 to 199	
20		51 to 199	20	51 to 199		
Example	Part no.: CQSB25-47D CQSB25-50D with 3 mm width spacer inside. B dimension is 72.5 mm.	Part no.: CQSB25-47D-XB10 Makes 47 stroke tube. B dimension is 69.5 mm.	20, 25	1 to 49	20, 25	6 to 49
			25	51 to 299	25	51 to 299

Refer to pages 852 to 853 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke



**Weight/Without Auto Switch** (g)

Bore size (mm)	Cylinder stroke (mm)																	
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300
<b>12</b>	29	36	42	49	56	63	93	100	107	113	147	180	213	246	279	312	—	—
<b>16</b>	38	47	56	64	73	82	119	128	136	145	187	229	271	313	355	397	—	—
<b>20</b>	63	75	88	101	114	127	140	153	166	178	306	370	434	498	562	627	—	—
<b>25</b>	91	107	123	139	155	171	186	202	218	234	399	478	557	636	715	794	952	1110

**For standard stroke**

Calculation: (Example) **CQSD20-20DCM**

- Cylinder weight: CQSB20-20D.....101 g
- Additional weight: Rod end male thread.....10 g
- Additional weight: Rubber bumper.....-2 g
- Additional weight: Double clevis type .....92 g

201 g

**Weight/With Auto Switch (Built-in magnet)** (g)

Bore size (mm)	Cylinder stroke (mm)																	
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300
<b>12</b>	37	43	50	57	63	70	94	101	108	114	148	181	214	247	280	313	—	—
<b>16</b>	48	57	66	74	83	92	121	129	137	146	188	231	273	315	357	399	—	—
<b>20</b>	93	106	119	132	144	157	170	182	195	208	311	375	439	503	567	632	—	—
<b>25</b>	134	150	166	182	197	213	229	245	261	277	406	485	564	643	721	800	958	1116

**Additional Weight** (g)

Bore size (mm)		<b>12</b>	<b>16</b>	<b>20</b>	<b>25</b>
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
With boss on head end		0.7	1.3	2	3
Rubber bumper * (No need to add for long stroke)		0	1	-2	-3
Compact foot type (Including mounting bolt)		41 (39)	51 (47)	121 (115)	140 (131)
Foot type (Including mounting bolt)		55 (53)	65 (61)	159 (153)	181 (172)
Rod side flange type (Including mounting bolt)		58 (56)	70 (66)	143 (137)	180 (171)
Head side flange type (Including mounting bolt)		56	66	137	171
Double clevis type (Including pin, snap ring, bolt)		34	40	92	127

( ) : denotes the values of long stroke model.

**Mounting Bracket Part No.**

Bore size (mm)	Foot (1)	Compact foot (1)	Flange	Double clevis
<b>12</b>	CQS-L012	CQS-LC012	CQS-F012	CQS-D012
<b>16</b>	CQS-L016	CQS-LC016	CQS-F016	CQS-D016
<b>20</b>	CQS-L020	CQS-LC020	CQS-F020	CQS-D020
<b>25</b>	CQS-L025	CQS-LC025	CQS-F025	CQS-D025

Note1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.

Note2) Parts belonging to each bracket are as follows.

Foot, Compact foot, Flange type: Body mounting bolt

Double clevis type: Clevis pin, Type C retaining ring for axis,

Body mounting bolt.

# CQS Series

## Allowable Kinetic Energy

### Load Mass and Piston Speed

Bore size (mm)	12	16	20	25
Standard/ Allowable kinetic energy: <b>Ea</b>	0.022	0.038	0.055	0.09
With rubber bumper/ Allowable kinetic energy: <b>Eb</b>	0.043	0.075	0.110	0.18

$$\text{Kinetic energy E (J)} = \frac{(m_1+m_2)V^2}{2}$$

**m1**: Mass of cylinder movable parts    kg  
**m2**: Load mass    kg  
**V**: Piston speed    m/s

### Mass of Movable Parts/Without Built-in Magnet: CQSB□-□D(C)(M) (g)

Bore size (mm)	Cylinder stroke (mm)																											
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300										
12	5	6	7	8	9	11	16	17	18	19	25	30	36	41	47	53	—	—										
16	8	10	12	14	16	18	28	30	32	34	44	54	64	74	84	94	—	—										
20	15	18	21	24	28	31	34	37	40	43	73	88	104	119	135	150	—	—										
25	23	28	32	37	41	46	50	55	59	64	112	135	157	179	202	224	269	314										

### Mass of Movable Parts/With Built-in Magnet: CDQSB□-□D(C)(M) (g)

Bore size (mm)	Cylinder stroke (mm)																											
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300										
12	5	7	8	9	10	11	16	18	19	20	25	31	37	42	48	53	—	—										
16	9	11	13	15	17	19	29	31	33	35	45	55	65	75	85	95	—	—										
20	21	24	27	30	33	36	39	42	46	49	78	93	109	124	140	155	—	—										
25	37	42	46	51	55	59	64	68	73	77	118	141	163	186	208	230	275	320										

### Additional Mass of Movable Parts

Bore size (mm)	12	16	20	25	
Rod end male thread	Male thread	2	3	6	13
	Nut	1	2	4	8
Rubber bumper (No need to add for long stroke)	0	-1	-2	-2	
Foot type, Rod side flange type (No need to add for long stroke)	2	4	6	9	

Calculation: (Example) **CQSB20-20DCM**

- Basic mass: CQSB20-20D ..... 24 g
  - Additional mass: Rod end male thread ..... 10 g
  - : With rubber bumper ..... -2 g
- Total 32 g

**Clean Series** (Standard stroke is only available.)

10 — C(D)QSB Bore size — Stroke D(M)

**Clean Series**


10	Relief type
11	Vacuum type

The type which is applicable for using inside the clean room graded ISO Class 4 by making an actuator's rod section a double seal construction and discharging by relief port directly to the outside of clean room.

**Specifications**

Action	Double acting, Single rod
Bore size (mm)	ø12, ø16, ø20, ø25
Proof pressure	1.5 MPa
Maximum operating pressure	1.0 MPa
Rubber bumper	None
Piping	Screw-in piping
Piston speed	30 to 400 mm/s
Mounting	Through-hole/Both ends tapped common
Auto switch	Mountable

Note) For details, please contact SMC.

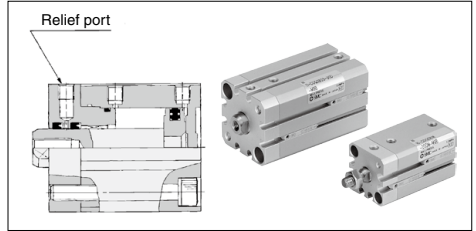


For details, refer to the [Web Catalog](#).

**Smooth Cylinder**

CQS Y Mounting Bore size — Stroke DC(M)

**Smooth Cylinder**

Smooth operation with a little sticking and slipping at low speed.  
Dual-side low friction operation is possible.



Some of the parts are different from the dimensions of the double acting, single rod type.  
Refer to the [Web Catalog](#).

**Specifications**

Bore size (mm)	12	16	20	25
Type	Pneumatic (Non-lube)			
Action	Double acting, Single rod			
Fluid	Air			
Proof pressure	1.05 MPa			
Maximum operating pressure	0.7 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)			
Cushion	None, Rubber bumper*			
Rod end thread	Female thread			
Stroke length tolerance	+1.0*			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable leakage	0.5 L/min (ANR) or less			

\* Stroke length tolerance does not include the deflection of the bumper.

**Minimum operating pressure** (MPa)


Bore size (mm)	12	16	20	25
Minimum operating pressure	0.03		0.02	

**Low-speed Cylinder**

CQS X Mounting Bore size — Stroke D(C)(M)

**Low-speed Cylinder**

Smooth operation with a little sticking and slipping at low speed.  
Can start smoothly with a little ejection even after being rendered for hours.



The dimensions are the same as the double acting, single rod type.  
Refer to page 806 for details.

**Specifications**

Bore size (mm)	12	16	20	25
Type	Pneumatic (Non-lube)			
Action	Double acting, Single rod			
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)			
Rubber bumper	None, Rubber bumper*			
Rod end thread	Female thread			
Stroke length tolerance	Standard stroke $\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$			
Mounting	Through-hole/Both ends tapped common			
Piston speed	ø12, ø16: 1 to 300 mm/s ø20, ø25: 0.5 to 300 mm/s			


\* Stroke length tolerance does not include the deflection of the bumper.

**Minimum operating pressure** (MPa)

	12	16	20	25
Minimum operating pressure	0.03	0.03	0.025	0.025

# CQS Series

## Compact Cylinder with Stable Lubrication Function (Lube-retainer)

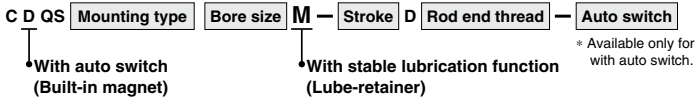


### Specifications

Bore size (mm)	20, 25
Action	Double acting, Single rod
Minimum operating pressure	0.1 MPa
Piston speed	50 to 500 mm/s
Cushion	None

\* Specifications other than those shown above are the same as the standard model.

### Dimensions (Dimensions other than those shown below are the same as the standard model.)

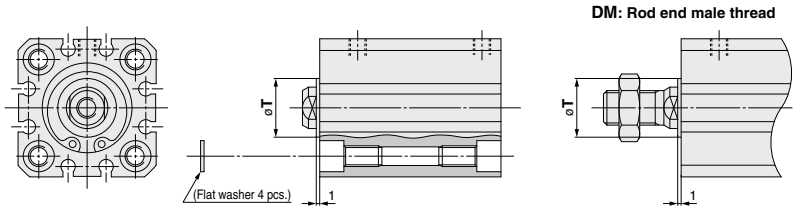

Bore size	Standard stroke	T (mm)
20	5, 10, 15, 20, 25, 30,	15
25	35, 40, 45, 50	18

\* The mounting dimensions of the mounting bracket are the same as the standard model.

### Mounting Bracket Part No.

Bore size (mm)	Foot	Compact foot	Flange
20	CQS-LM020	CQS-LCM020	CQS-FM020
25	CQS-LM025	CQS-LCM025	CQS-FM025


\* The double clevis type is the same as the standard model.

\* When ordering foot and compact foot brackets, order 2 pieces per cylinder.


For details, refer to page 1205.

## Construction

Basic type




With rubber bumper




With auto switch (Built-in magnet)


ø12, ø16




Rod end male thread




Long stroke

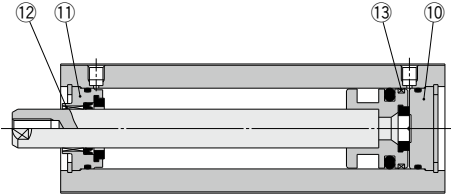

ø20, ø25



With boss on head end



### Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Rod end nut	Carbon steel	Zinc chromated
7	Spacer for switch type	Aluminum alloy	Chromated
8	Bumper A	Urethane	
9	Bumper B	Urethane	
10	Bottom plate	Aluminum alloy	Anodized

### Component Parts

No.	Description	Material	Note
11	Collar	Aluminum alloy	Anodized
12	Bushing	Oil-impregnated sintered alloy	
13	Wear ring	Resin	
14	Magnet	—	
15	Centering location ring	Aluminum alloy	Anodized
16*	Rod seal	NBR	
17*	Piston seal	NBR	
18*	Tube gasket	NBR	

### Replacement Parts: Seal Kit (Basic type)

Bore size (mm)	Kit no.	Contents
12	CQSB12-PS	Set of nos. above 16, 17, 18
16	CQSB16-PS	
20	CQSB20-PS	
25	CQSB25-PS	

### Replacement Parts: Seal Kit (Long stroke)

Bore size (mm)	Kit no.	Contents
12	CQSB12-L-PS	Set of nos. above 16, 17, 18
16	CQSB16-L-PS	
20	CQSB20-L-PS	
25	CQSB25-L-PS	

\* Seal kit includes 16, 17, 18. Order the seal kit, based on each bore size.  
(The long stroke type includes 2 tube gaskets.)


\* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

## Mounting Bolt for CQS without Auto Switch


Mounting bolt for through-hole mounting type of CQSB is available as an option.  
Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x25L 4 pcs.**

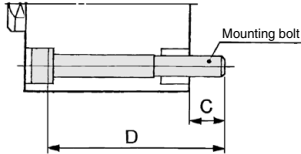

Note 1) To install a through-hole type mounting bolt, make sure to use the flat washer that is provided.

Note 2) We do not provide mounting bolts for the long stroke type.  
Secure the cylinder with both ends of the cylinder tube tapped or prepare mounting bolts separately.

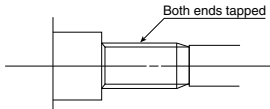

Cylinder model	C	D	Mounting bolt part no.	
<b>CQSB12-5D</b>	6.5	25	CQ-M3 x 25L	
-10D		30	x 30L	
-15D		35	x 35L	
-20D		40	x 40L	
-25D		45	x 45L	
-30D		50	x 50L	
-35DC				
-40DC				
-45DC				
-50DC				
-75DC			Note 2)	
-100DC				
-125DC				
-150DC				
-175DC				
-200DC				
<b>CQSB16-5D</b>	6.5	25	CQ-M3 x 25L	
-10D		30	x 30L	
-15D		35	x 35L	
-20D		40	x 40L	
-25D		45	x 45L	
-30D		50	x 50L	
-35DC				
-40DC				
-45DC				
-50DC				
-75DC			Note 2)	
-100DC				
-125DC				
-150DC				
-175DC				
-200DC				


Cylinder model	C	D	Mounting bolt part no.	
<b>CQSB20-5D</b>	6.5	25	CQ-M5 x 25L	
-10D		30	x 30L	
-15D		35	x 35L	
-20D		40	x 40L	
-25D		45	x 45L	
-30D		50	x 50L	
-35DC				
-40DC				
-45DC				
-50DC				
-75DC			Note 2)	
-100DC				
-125DC				
-150DC				
-175DC				
-200DC				
<b>CQSB25-5D</b>	8.5	30	CQ-M5 x 30L	
-10D		35	x 35L	
-15D		40	x 40L	
-20D		45	x 45L	
-25D		50	x 50L	
-30D		55	x 55L	
-35DC				
-40DC				
-45DC				
-50DC				
-75DC			Note 2)	
-100DC				
-125DC				
-150DC				
-175DC				
-200DC				
-250DC				
-300DC				

Material: Chromium molybdenum steel  
Surface treatment: Nickel plated

### Mounting Bolt for CDQS with Auto Switch


Mounting bolt for through-hole mounting type of CDQSB is available as an option. Refer to the following for ordering procedures. Order the actual number of bolts that will be used.

**Example) CQ-M3x30L 4 pcs.**

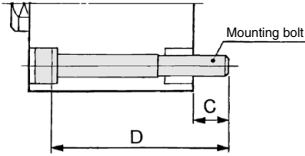

Note 1) To install a through-hole type mounting bolt, make sure to use the flat washer that is provided.

Note 2) We do not provide mounting bolts for the long stroke type. Secure the cylinder with both ends of the cylinder tube tapped or prepare mounting bolts separately.

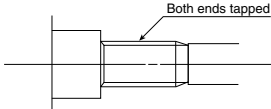

Cylinder model	C	D	Mounting bolt part no.
<b>CDQSB12-5D</b>		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
-35DC			
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
<b>CDQSB16-5D</b>		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
-35DC			
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			

Note 2)

Note 2)

Cylinder model	C	D	Mounting bolt part no.
<b>CDQSB20-5D</b>		35	CQ-M5 x 35L
-10D	6.5	40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
-35DC		65	x 65L
-40DC		70	x 70L
-45DC		75	x 75L
-50DC		80	x 80L
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
<b>CDQSB25-5D</b>		40	CQ-M5 x 40L
-10D	8.5	45	x 45L
-15D		50	x 50L
-20D		55	x 55L
-25D		60	x 60L
-30D		65	x 65L
-35DC		70	x 70L
-40DC		75	x 75L
-45DC		80	x 80L
-50DC		85	x 85L
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
-250DC			
-300DC			

Note 2)

Note 2)

Material: Chromium molybdenum steel  
 Surface treatment: Zinc chromated


# CQS Series

## Dimensions: $\phi 12$ to $\phi 25$



### Basic type (Through-hole/Both ends tapped common): CQSB/CDQSB

\* For the auto switch mounting position and its mounting height, refer to page 852.


$\phi 12$




$\phi 16$

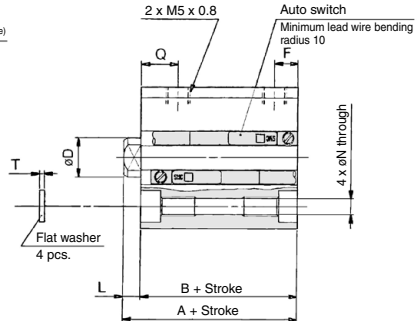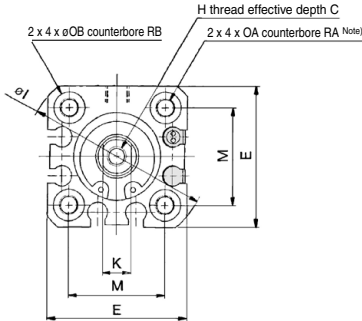


$\phi 20, \phi 25$



### Rod end male thread



### With boss on head end

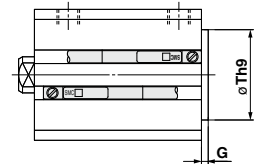

• Length with intermediate stroke

(1) Spacer ... The dimensions will be identical to those of the nearest long stroke. Those that exceed the standard stroke will have the long stroke dimensions.

(2) Exclusive body (-XB10)....Add stroke. Also, the stroke length that exceeds the standard stroke would be the long stroke dimension.

### Rod End Male Thread

Bore size (mm)	B1	C1	H1	Standard stroke		Long stroke	MM	X
				L1	L1			
12	8	9	4	14	24	M5 x 0.8	10.5	
16	10	10	5	15.5	25.5	M6 x 1.0	12	
20	13	12	5	18.5	28.5	M8 x 1.25	14	
25	17	15	6	22.5	32.5	M10 x 1.25	17.5	

### With Boss on Head End (mm)

Bore size (mm)	G	Th9
12	1.5	15 <sup>0</sup> <sub>-0.043</sub>
16	1.5	20 <sup>0</sup> <sub>-0.052</sub>
20	2	13 <sup>0</sup> <sub>-0.043</sub>
25	2	15 <sup>0</sup> <sub>-0.043</sub>

Note1) The product with boss on head end is applicable to only the standard stroke.

Note2) With boss on rod end : Option (Suffix "-XC36" to the end of part number.)

Note that only bore sizes  $\phi 12$  and  $\phi 16$  are applicable to the long stroke.

### Basic Type

Bore size (mm)	Standard stroke range (mm)	Standard stroke												Long stroke range (mm)	Long stroke																	
		Without auto switch						With auto switch							With/Without auto switch				C	D	E	H	I	K	M	N	OA	OB	Q	RA	RB	T
		A	B	F	L	A	B	F	L	A	B	F	L																			
12	5 to 30	20.5	17	5	3.5	25.5	22	5	3.5	35 to 200	45.5	32	7.5	13.5	6	6	25	M3 x 0.5	32	5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5				
16	5 to 30	20.5	17	5	3.5	25.5	22	5	3.5	35 to 200	45.5	32	7.5	13.5	8	8	29	M4 x 0.7	38	6	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5				
20	5 to 50	24	19.5	5.5	4.5	34	29.5	5.5	4.5	75 to 200	55.5	41	8	14.5	7	10	36	M5 x 0.8	47	8	25.5	5.4	M6 x 1.0	9	8	10	7	1				
25	5 to 50	27.5	22.5	5.5	5	37.5	32.5	5.5	5	75 to 300	59	44	9	15	12	12	40	M6 x 1.0	52	10	28	5.4	M6 x 1.0	9	9	10	7	1				


Note 1) For the following bore/stroke sizes through-hole is threaded over the entire length: Basic type  $\phi 12$  and  $\phi 16$ ; 5 stroke,  $\phi 20$ ; 5 to 15 stroke,  $\phi 25$ ; 5 to 10 stroke,  $\phi 20$  with auto switch built-in magnet; 5 stroke.

Note 2) Rubber bumper type has the same dimensions as those indicated above.


\* For details about the rod end nut and accessory brackets, refer to page 809.




**Foot type: CQSL/CDQSL**

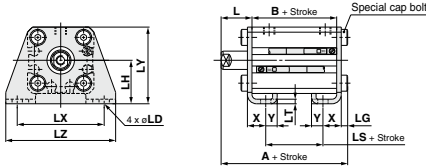


**Rod end male thread**




**Compact foot type: CQSLC/CDQSLC**

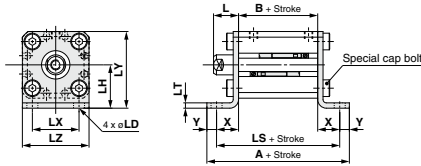


**Rod end male thread**




**Rod side flange type: CQSF/CDQSF**

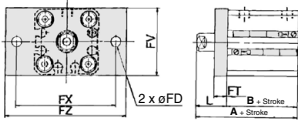


**Rod end male thread**



**Head side flange type: CQSG/CDQSG**

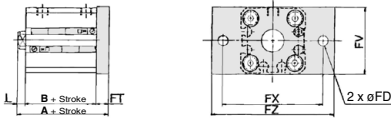

**Rod end male thread**



**Foot Type**

Bore size (mm)	Standard stroke range (mm)	Standard stroke						Long stroke range (mm)			Long stroke		
		Without auto switch			With auto switch			Without/With auto switch			Without/With auto switch		
		A	B	LS	A	B	LS	A	B	LS	A	B	LS
12	5 to 30	35.3	17	5	40.3	22	10	35 to 200	50.3	32	20		
16	5 to 30	35.3	17	5	40.3	22	10	35 to 200	50.3	32	20		
20	5 to 50	41.2	19.5	7.5	51.2	29.5	17.5	75 to 200	62.7	41	29		
25	5 to 50	44.7	22.5	7.5	54.7	32.5	17.5	75 to 300	66.2	44	29		

Bore size (mm)	L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

**Compact Foot Type**

Bore size (mm)	Standard stroke range (mm)	Standard stroke						Long stroke range (mm)			Long stroke		
		Without auto switch			With auto switch			Without/With auto switch			Without/With auto switch		
		A	B	LS	A	B	LS	A	B	LS	A	B	LS
12	5 to 30	44.6	17	35.6	49.6	22	40.6	35 to 200	59.6	32	50.6		
16	5 to 30	45.6	17	35.6	50.6	22	40.6	35 to 200	60.6	32	50.6		
20	5 to 50	57.5	19.5	45.9	67.5	29.5	55.9	75 to 200	79	41	67.4		
25	5 to 50	60.5	22.5	48.9	70.5	32.5	58.9	75 to 300	82	44	70.4		

Bore size (mm)	L	L1	LD	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

**Rod Side Flange Type**

Bore size (mm)	Standard stroke range (mm)	Standard stroke						Long stroke range (mm)		Long stroke	
		Without auto switch			With auto switch			Without/With auto switch		Without/With auto switch	
		A	B	A	B			A	B		
12	5 to 30	30.5	17	35.5	22	35 to 200	45.5	32			
16	5 to 30	30.5	17	35.5	22	35 to 200	45.5	32			
20	5 to 50	34	19.5	44	29.5	75 to 200	55.5	41			
25	5 to 50	37.5	22.5	47.5	32.5	75 to 300	59	44			

Bore size (mm)	FD	FT	FV	FX	FZ	L	L1
12	4.5	5.5	25	45	55	13.5	24
16	4.5	5.5	30	45	55	13.5	25.5
20	6.6	8	39	48	60	14.5	28.5
25	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

**Head Side Flange Type**

Bore size (mm)	Standard stroke range (mm)	Standard stroke						Long stroke range (mm)			Long stroke			
		Without auto switch			With auto switch			Without/With auto switch			Without/With auto switch			
		A	B	L	L1	A	B	L	L1	A	B	L	L1	
12	5 to 30	26	17	3.5	14	31	22	3.5	14	35 to 200	51	32	13.5	24
16	5 to 30	26	17	3.5	15.5	31	22	3.5	15.5	35 to 200	51	32	13.5	25.5
20	5 to 50	32	19.5	4.5	18.5	42	29.5	4.5	18.5	75 to 200	63.5	41	14.5	28.5
25	5 to 50	35.5	22.5	5	22.5	45.5	32.5	5	22.5	75 to 300	67	44	15	32.5

Bore size (mm)	FD	FT	FV	FX	FZ
12	4.5	5.5	25	45	55
16	4.5	5.5	30	45	55
20	6.6	8	39	48	60
25	6.6	8	42	52	64


Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

\* For details about the rod end nut and accessory brackets, refer to page 809.


# CQS Series

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

## Double clevis type: CQSD/CDQSD

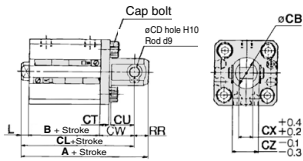

### Rod end male thread



## Double Clevis Type

Bore size (mm)	Standard stroke range (mm)	Standard stroke										Long stroke range (mm)	Long stroke				
		Without auto switch					With auto switch						Without/With auto switch				
		A	B	CL	L	L <sub>1</sub>	A	B	CL	L	L <sub>1</sub>		A	B	CL	L	L <sub>1</sub>
<b>12</b>	5 to 30	40.5	17	34.5	3.5	14	45.5	22	39.5	3.5	14	35 to 200	65.5	32	59.5	13.5	24
<b>16</b>	5 to 30	41.5	17	35.5	3.5	15.5	46.5	22	40.5	3.5	15.5	35 to 200	66.5	32	60.5	13.5	25.5
<b>20</b>	5 to 50	51	19.5	42	4.5	18.5	61	29.5	52	4.5	18.5	75 to 200	82.5	41	73.5	14.5	28.5
<b>25</b>	5 to 50	57.5	22.5	47.5	5	22.5	67.5	32.5	57.5	5	22.5	75 to 300	89	44	79	15	32.5


Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	RR
<b>12</b>	12	5	4	7	14	5	10	6
<b>16</b>	14	5	4	10	15	6.5	12	6
<b>20</b>	20	8	5	12	18	8	16	9
<b>25</b>	24	10	5	14	20	10	20	10

Double clevis bracket material: Carbon steel  
Surface treatment: Nickel plated

\* For details about the double clevis pivot bracket, refer to page 809.

\* For details about the rod end nut and accessory brackets, refer to page 899.

## Double clevis pivot bracket

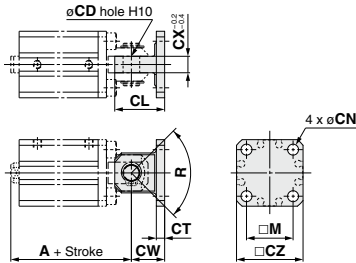


Bore size (mm)	Bracket part no.	Stroke range (mm)	A		CW	CT	CL	CX	CD	M	CZ	R	CN	Hexagon socket head cap screw for mounting pivot bracket (Accessory)
			Without auto switch	With auto switch										
<b>12</b>	<b>CQ-C012</b>	5 to 30	34.5	39.5	14	4	19	5	5	15.5	25	100°	4.5	M4 x 10L
<b>16</b>	<b>CQ-C016</b>	5 to 30	35.5	40.5	15	4	21	6.5	5	20	28	100°	4.5	M4 x 10L
<b>20</b>	<b>CQ-C020</b>	5 to 50	42	52	18	5	27	8	8	25.5	35	80°	6.6	M6 x 12L
<b>25</b>	<b>CQ-C025</b>	5 to 50	47.5	57.5	20	5	30	10	10	28	40	90°	6.6	M6 x 12L

\* The double clevis pin and retaining ring are not included.

Double clevis pivot bracket material: Carbon steel  
Surface treatment: Nickel plated

# CQS Series Accessory Dimensions


## Single Knuckle Joint



Material: Carbon steel  
Surface treatment: Nickel plating  
(mm)

Bore size (mm)	Part no.	A	A <sub>1</sub>	E <sub>1</sub>	L <sub>1</sub>	MM	<sup>°</sup> R <sub>1</sub>	U <sub>1</sub>	NDH <sub>10</sub>	NX	Weight (g)
12	I-G012	21.5	6	□10	16	M5 x 0.8	6.3	7	5 <sup>+0.048</sup> <sub>0</sub>	5 <sup>+0.2</sup> <sub>-0.4</sub>	9
16	I-G016	32	8	□12	25	M6 x 1	8.1	14	5 <sup>+0.048</sup> <sub>0</sub>	6.4 <sup>+0.1</sup> <sub>-0.3</sub>	9
20	I-G02	34	8.5	□16	25	M8 x 1.25	10.3	11.5	8 <sup>+0.058</sup> <sub>0</sub>	8 <sup>+0.2</sup> <sub>-0.4</sub>	38
25	I-G03	41	10.5	□20	30	M10 x 1.25	12.8	14	10 <sup>+0.058</sup> <sub>0</sub>	10 <sup>+0.2</sup> <sub>-0.4</sub>	70

## Double Knuckle Joint




Material: Carbon steel  
Surface treatment: Nickel plating  
(mm)

Bore size (mm)	Part no.	A	A <sub>1</sub>	E <sub>1</sub>	L <sub>1</sub>	MM	<sup>°</sup> R <sub>1</sub>	U <sub>1</sub>	NDH <sub>10</sub>	NX	NZ	L	Applicable pin part no.	Weight (g)
12	Y-G012	21.5	6	□10	16	M5 x 0.8	6.3	7	5 <sup>+0.048</sup> <sub>0</sub>	5 <sup>+0.4</sup> <sub>-0.2</sub>	10	14.6	IY-G012	11
16	Y-G016	28	11	□12	21	M6 x 1	8.1	10	5 <sup>+0.048</sup> <sub>0</sub>	6.5 <sup>+0.2</sup> <sub>-0.2</sub>	12	16.6	IY-J015	11
20	Y-G02	34	8.5	□16	25	M8 x 1.25	10.3	11.5	8 <sup>+0.058</sup> <sub>0</sub>	8 <sup>+0.4</sup> <sub>-0.2</sub>	16	21	IY-G02	45
25	Y-G03	41	10.5	□20	30	M10 x 1.25	12.8	14	10 <sup>+0.058</sup> <sub>0</sub>	10 <sup>+0.4</sup> <sub>-0.2</sub>	20	25.6	IY-G03	86

\* Knuckle pin and retaining rings are included.

## Knuckle Pin (Common with double clevis pin)




Material: Carbon steel  
(mm)

Bore size (mm)	Part no.	Dd9	L	d	L <sub>1</sub>	m	t	Applicable retaining ring	Weight (g)
12	IY-G012	5 <sup>-0.050</sup> <sub>-0.050</sub>	14.6	4.8	10.2	1.5	0.7	Type C5 for axis	2
16	IY-J015 <sup>Note)</sup>	5 <sup>-0.050</sup> <sub>-0.050</sub>	16.6	4.8	12.2	1.5	0.7	Type C5 for axis	3
20	IY-G02	8 <sup>-0.040</sup> <sub>-0.076</sub>	21	7.6	16.2	1.5	0.9	Type C8 for axis	8
25	IY-G03	10 <sup>-0.040</sup> <sub>-0.076</sub>	25.6	9.6	20.2	1.55	1.15	Type C10 for axis	16

\* Type C retaining rings for axis are included.  
Note) Only the IY-J015 is stainless steel.

## Rod End Nut



Material: Carbon steel  
Surface treatment: Zinc chromated  
(mm)

Bore size (mm)	Part no.	d	H	B	C	Weight (g)
12	NTJ-015C	M5 x 0.8	4	8	9.2	1
16	NT-015A	M6 x 1	5	10	11.5	2
20	NT-02	M8 x 1.25	5	13	15.0	4
25	NT-03	M10 x 1.25	6	17	19.6	8

## Rod End Bracket, Rod End Nut Material: Stainless Steel

### Part Nos. (Dimensions: Same as the standard type)

Bore size (mm)	Single knuckle joint	Double knuckle joint*	Knuckle joint pin	Rod end nut
20	I-G02SUS	Y-G02SUS	IY-G02SUS	NT-02SUS
25	I-G03SUS	Y-G03SUS	IY-G03SUS	NT-03SUS

\* A knuckle pin and retaining rings are included with the double knuckle joint. Retaining rings are included with the knuckle joint pin.

# CQS Series

## Simple Joint (CQS): $\phi 12$ to $\phi 25$

### Joint/Mounting Bracket (Type A/B) Part Nos.

Bore size (mm)	Joint	Type A mounting bracket	Type B mounting bracket
12	YU-012	YA-012	YB-012
16	YU-016	YA-016	YB-016
20	YU-020	YA-020	YB-020
25	YU-025	YA-025	YB-025

<Ordering>

Joints are not included with type A or B mounting brackets. Order them separately.



(Example)

Bore size  $\phi 12$

Part no.

• Type A mounting bracket .....YA-012

• Joint .....YU-012

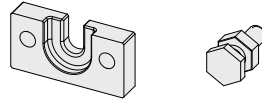


### Allowable Eccentricity

(mm)

Bore size (mm)	12	16	20	25
Eccentricity tolerance	$\pm 0.5$			
Axial direction backlash	0.5			

### Type A Mounting Bracket

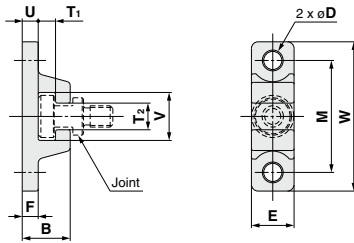


Material: Chromium molybdenum steel (Nickel plating)  
(mm)

Bore size (mm)	Part no.	B	D	E	F	M	T <sub>1</sub>	T <sub>2</sub>
12	YA-012	8	3.5	10	3	20	2.5	4
16	YA-016	8	3.5	10	3	24	2.5	5
20	YA-020	12	4.5	13	5	30	3.5	6
25	YA-025	12.5	5.5	15	5	33	3.5	7

Bore size (mm)	Part no.	U	V	W	Weight (g)
12	YA-012	3	8.5	30	9
16	YA-016	3	11	34	11
20	YA-020	5	13.5	42	27
25	YA-025	5	16.5	45	34

### Type B Mounting Bracket

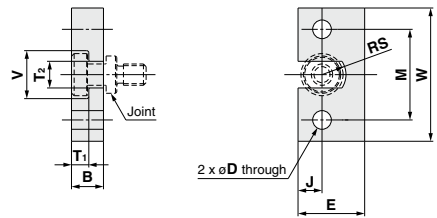


Material: Stainless steel  
(mm)

Bore size (mm)	Part no.	B	D	E	J	M	T <sub>1</sub>
12	YB-012	5	3.5	14	5	17	2.5
16	YB-016	5	3.5	16	6	20	2.5
20	YB-020	7	4.5	18	7	25.5	3.5
25	YB-025	7.5	5.5	20	8	28	3.5

Bore size (mm)	Part no.	T <sub>2</sub>	V	W	RS	Weight (g)
12	YB-012	4	8.6	25	2	11
16	YB-016	5	11	29	2.5	15
20	YB-020	6	13.6	36	3	28
25	YB-025	7	16.6	40	3.5	36

### Joint

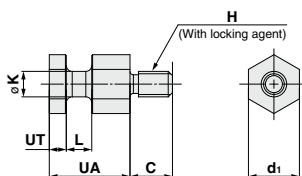

Material: Chromium molybdenum steel (Nickel plating)  
(mm)

Bore size (mm)	Part no.	UA	C	d <sub>1</sub>	H	K	L	UT	Weight (g)
12	YU-012	9.5	5	6	M3 x 0.5	3	3	2	2
16	YU-016	9.5	7	8	M4 x 0.7	4	3	2	4
20	YU-020	11.5	6	10	M5 x 0.8	5	4	3	7
25	YU-025	12	11	12	M6 x 1.0	6	4.5	3	11




# Compact Cylinder: Standard Type Double Acting, Double Rod

## CQSW Series

∅12, ∅16, ∅20, ∅25

### How to Order

With auto switch

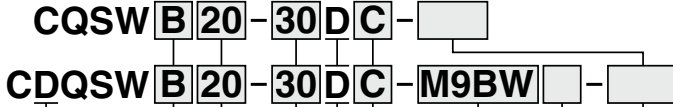

With auto switch  
(Built-in magnet)

Mounting type

<b>B</b>	Through-hole/Both ends tapped common (Standard)
<b>L</b>	Foot type
<b>LC</b>	Compact foot type
<b>F</b>	Flange type

- \* Mounting brackets are shipped together (but not assembled).
- \* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQSW" on page 814.

Bore size

<b>12</b>	12 mm
<b>16</b>	16 mm
<b>20</b>	20 mm
<b>25</b>	25 mm

Cylinder stroke (mm)

Standard Stroke

Bore size (mm)	Standard stroke (mm)
<b>12, 16</b>	5, 10, 15, 20, 25, 30
<b>20, 25</b>	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

For "Manufacture of Intermediate Strokes", refer to page 811.

Made to Order  
Refer to page 811 for details.

Number of auto switches

<b>Nil</b>	2 pcs.
<b>S</b>	1 pc.
<b>n</b>	"n" pcs.

Auto switch

Nil Without auto switch

\* Refer to the table below for the applicable auto switch model.

Body option

<b>Nil</b>	Standard
<b>C</b>	With rubber bumper
<b>M</b>	Rod end male thread

\* Combination of body options is available. CM

Action

**D** Double acting

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDQSWL25-30D

Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)			Pre-wired connector	Applicable load			
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)			5 (Z)		
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	<b>M9NV</b>	<b>M9N</b>	●	●	●	○	IC circuit	Relay, PLC		
				3-wire (PNP)			<b>M9PV</b>	<b>M9P</b>	●	●	●	○				
				2-wire	<b>M9BV</b>		<b>M9B</b>	●	●	●	○	—				
				3-wire (NPN)	<b>M9NWV</b>		<b>M9NW</b>	●	●	●	○	IC circuit				
	Diagnostic indication (2-color indicator)			3-wire (PNP)	<b>M9PWV</b>		<b>M9PW</b>	●	●	●	○	—				
				2-wire	<b>M9BWW</b>		<b>M9BW</b>	●	●	●	○	—				
				3-wire (NPN)	<b>M9NAV</b> <sup>*1</sup>		<b>M9NA</b> <sup>*1</sup>	○	○	○	○	—				
				3-wire (PNP)	<b>M9PAV</b> <sup>*1</sup>		<b>M9PA</b> <sup>*1</sup>	○	○	○	○	IC circuit				
Water resistant (2-color indicator)	2-wire	<b>M9BAV</b> <sup>*1</sup>	<b>M9BA</b> <sup>*1</sup>	○	○	○	○	—								
	2-wire (Non-polar)	—	<b>P3DWA</b> <sup>**</sup>	●	●	●	○	—								
	Magnetic field resistant (2-color indicator)	3-wire (NPN equivalent)	—	5 V	—	<b>A96V</b>	<b>A96</b>	●	—	●	—	—	IC circuit	—		
		2-wire	24 V	12 V	100 V	<b>A93V</b> <sup>*2</sup>	<b>A93</b>	●	●	●	—	—	—	Relay, PLC		
Reed auto switch	—	Grommet	Yes	(NPN equivalent)	24 V	12 V	100 V or less	<b>A90V</b>	<b>A90</b>	●	—	●	—	—	IC circuit	—
							100 V or less	<b>A90V</b>	<b>A90</b>	●	—	●	—	—	—	IC circuit

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols:  
 0.5 m..... Nil (Example) M9NV  
 1 m..... M (Example) M9NWV  
 3 m..... L (Example) M9NWL  
 5 m..... Z (Example) M9NZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\*\* Available only for ∅25.


It is mounted away from the port side to avoid interference with fittings.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

\* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□WV/M9□AV type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

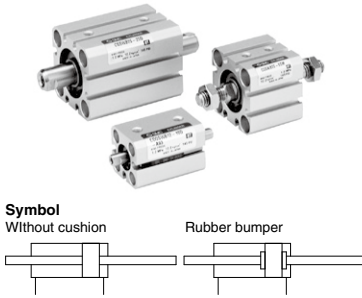

**Symbol**

Without cushion

Rubber bumper

**Specifications**

Bore size (mm)		12	16	20	25
<b>Action</b>		Double acting, Double rod			
<b>Fluid</b>		Air			
<b>Lubrication</b>		Not required (Non-lube)			
<b>Proof pressure</b>		1.5 MPa			
<b>Maximum operating pressure</b>		1.0 MPa			
<b>Minimum operating pressure</b>		0.07 MPa		0.05 MPa	
<b>Ambient and fluid temperature</b>		Without auto switch: -10 to 70°C (No freezing)			
		With auto switch: -10 to 60°C (No freezing)			
<b>Cushion</b>		None, Rubber bumper			
<b>Rod end thread</b>		Female thread			
<b>Stroke length tolerance</b>		+1.0 mm * 0			
<b>Piston speed</b>		50 to 500 mm/s			
<b>Allowable kinetic energy (J)</b>	Standard type	0.022	0.038	0.055	0.09
	With rubber bumper	0.043	0.075	0.11	0.18

\* Stroke length tolerance does not include the deflection of the bumper.



**Made to Order:**

**Individual Specifications**

(For details, refer to pages 854 and 855.)

Symbol	Specifications
-X235	Change of piston rod end of double rod cylinder
-X271	Fluororubber seals
-X633	Intermediate stroke of double rod cylinder

**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat-resistant cylinder (-10 to 150 °C) (without an auto switch)
-XB7	Cold-resistant cylinder (-40 to 70 °C) (without an auto switch)
-XB9	Low speed cylinder (10 to 50 mm/s)
-XB10	Intermediate stroke (Using exclusive body)
-XB13	Low speed cylinder (5 to 50 mm/s)
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-XC36	With boss in rod side
-XC85	Grease for food processing equipment

**Body Option**

Description	Application
Rod end male thread	Available for all standard models of double acting, double rod.
Rubber bumper	

**Mounting Bracket Part No.**

Bore size (mm)	Foot (1)	Compact foot (1)	Flange
12	CQS-L012	CQS-LC012	CQS-F012
16	CQS-L016	CQS-LC016	CQS-F016
20	CQS-L020	CQS-LC020	CQS-F020
25	CQS-L025	CQS-LC025	CQS-F025

Note 1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.  
Foot, Compact foot, Flange type: Body mounting bolt

**Theoretical Output**

(N)

Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT				
16	8	IN	151	45	75	106
		OUT				
20	10	IN	236	71	118	165
		OUT				
25	12	IN	378	113	189	264
		OUT				

**Manufacture of Intermediate Stroke**

Description	Spacer is installed in the standard stroke body.	Exclusive body (-XB10)
Part no.	Suffix "-X633" to the end of standard model no. (page 810).	Suffix "-XB10" to the end of standard model no. (page 810).
Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.	Dealing with the stroke in 1 mm increments by using an exclusive body with the specified stroke.
Stroke range	Bore size	Bore size
	Stroke range	Stroke range
Example	Part no.: CQSWB25-47D-X633 CQSWB25-50D with 3 mm width spacer inside. B dimension is 79 mm.	Part no.: CQSWB25-47D-XB10 Makes 47 stroke tube. B dimension is 76 mm.

Refer to pages 852 to 853 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke

**Moisture Control Tube  
IDK Series**



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.

Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [web Catalog](#).

# CQSW Series

## Weight/Without Auto Switch (g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	38	46	54	62	69	77	—	—	—	—
16	50	61	71	81	92	102	—	—	—	—
20	89	104	120	136	152	167	183	199	215	231
25	127	146	166	186	206	227	247	267	287	308

## Weight/With Auto Switch (Built-in magnet) (g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	46	54	62	70	77	85	—	—	—	—
16	60	71	81	91	102	112	—	—	—	—
20	119	134	150	166	182	198	214	230	245	261
25	154	174	195	215	235	255	276	296	316	336

## Additional Weight (g)

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	3	6	12	24
	Nut	2	4	8	16
With rubber bumper		0	-1	-2	-2
Foot type (Including mounting bolt)		55	65	159	181
Compact foot type (Including mounting bolt)		41	51	121	140
Rod side flange type (Including mounting bolt)		58	70	143	180

Calculation: (Example) **CQSWF12-10DM**

- Cylinder weight: CQSWB12-10D.....46 g
- Additional weight: Rod end male thread.....5 g
- : Rod side flange type.....58 g

109 g

## ⚠ Caution

### Retaining Ring Installation/Removal



- For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
- Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.

## ⚠ Warning

### Mounting

Do not apply the reverse torque to the piston rods sticking out from both sides of this cylinder at the same time. The torque makes connection threads inside loosen, which may cause an accident or malfunction.


Install or remove a load while the piston rod width across flats are secured. Do not fix the other side of piston rod width across flat and apply the reverse torque.






## Construction

### Basic type

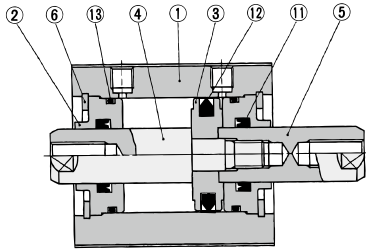


### With rubber bumper

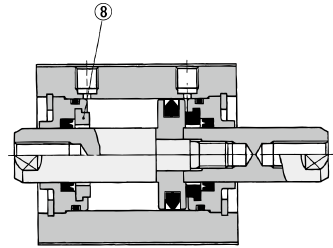


### With auto switch (Built-in magnet)

ø12, ø16

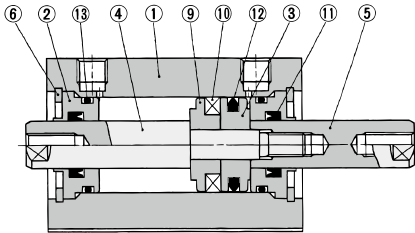


ø20, ø25

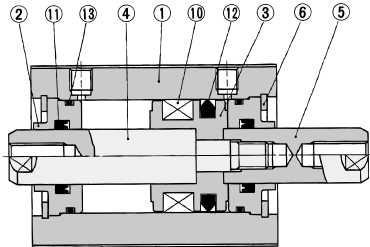

### Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	
4	Piston rod A	Stainless steel	
5	Piston rod B	Stainless steel	
6	Retaining ring	Carbon tool steel	Phosphate coated
7	Rod end nut	Carbon steel	Zinc chromated
8	Bumper	Urethane	
9	Spacer for switch	Aluminum alloy	Chromated
10	Magnet	—	
11	Rod seal	NBR	
12	Piston seal	NBR	
13	Tube gasket	NBR	

### Rod end male thread

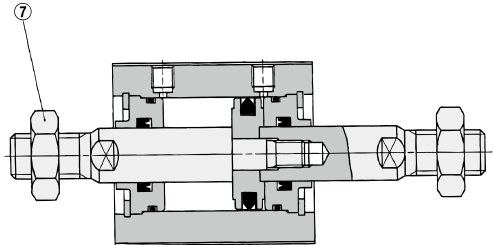

### Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSWB12-PS	Set of nos. above ⑪, ⑫, ⑬
16	CQSWB16-PS	
20	CQSWB20-PS	
25	CQSWB25-PS	

\* Seal kit includes ⑪, ⑫, ⑬. Order the seal kit, based on each bore size.

\* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)


# CQSW Series

## Mounting Bolt for CQSW

Mounting method: Mounting bolt for through-hole mounting type of CQSW is available as an option.

Refer to the following for ordering procedures. Order the actual number of bolts that will be used.

**Example) CQ-M3x30L 4 pcs.**

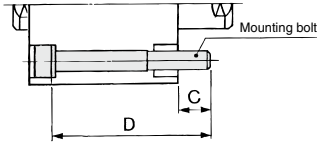

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
<b>CQSWB12-5D</b>		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
<b>CQSWB16-5D</b>		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
<b>CQSWB20-5D</b>		35	CQ-M5 x 35L
-10D	10	40	x 40L
-15D		45	x 45L
-20D		50	x 50L

Cylinder model	C	D	Mounting bolt part no.
<b>CQSWB20-25D</b>		55	CQ-M5 x 55L
-30D	10	60	x 60L
-35D		65	x 65L
-40D		70	x 70L
-45D		75	x 75L
-50D		80	x 80L
<b>CQSWB25-5D</b>		35	CQ-M5 x 35L
-10D	7	40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
-35D		65	x 65L
-40D		70	x 70L
-45D		75	x 75L
-50D		80	x 80L


Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated

## Mounting Bolt for CDQSW with Auto Switch

Mounting method: Mounting bolt for through-hole mounting type of CDQSW is available as an option.

Refer to the following for ordering procedures. Order the actual number of bolts that will be used.

**Example) CQ-M3x35L 4 pcs.**

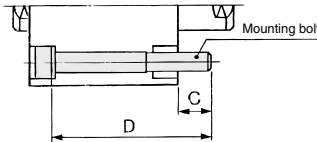

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
<b>CDQSWB12-5D</b>		35	CQ-M3 x 35L
-10D	6.5	40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
<b>CDQSWB16-5D</b>		35	CQ-M3 x 35L
-10D	6.5	40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
<b>CDQSWB20-5D</b>		45	CQ-M5 x 45L
-10D	10	50	x 50L
-15D		55	x 55L
-20D		60	x 60L




Cylinder model	C	D	Mounting bolt part no.
<b>CDQSWB20-25D</b>		65	CQ-M5 x 65L
-30D	10	70	x 70L
-35D		75	x 75L
-40D		80	x 80L
-45D		85	x 85L
-50D		90	x 90L
<b>CDQSWB25-5D</b>		45	CQ-M5 x 45L
-10D	7	50	x 50L
-15D		55	x 55L
-20D		60	x 60L
-25D		65	x 65L
-30D		70	x 70L
-35D		75	x 75L
-40D		80	x 80L
-45D		85	x 85L
-50D		90	x 90L

Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated



**Dimensions:  $\phi 12$  to  $\phi 25$**

**Basic type (Through-hole/Both ends tapped common): CQSWB/CDQSWB**

$\phi 12$

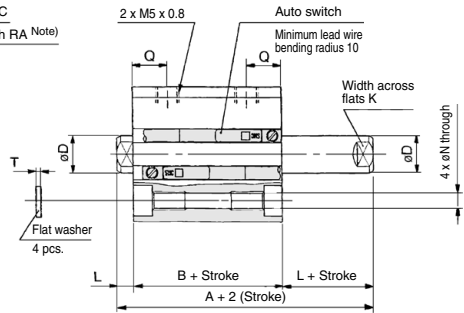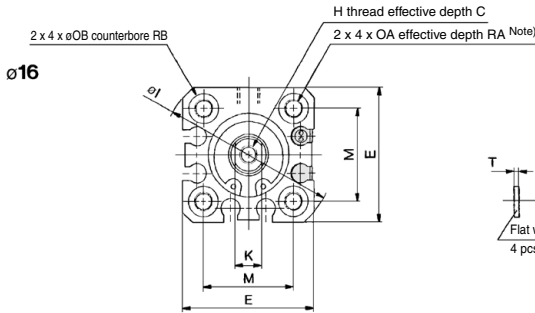

$\phi 20, \phi 25$

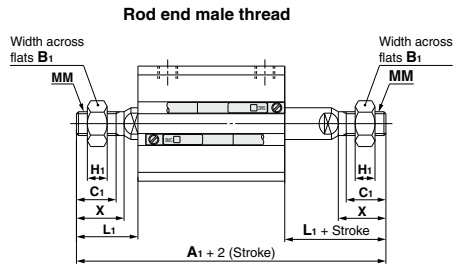

**Rod End Male Thread**

Bore size (mm)	Without auto switch		With auto switch		B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>	MM	X
	A <sub>1</sub>	B <sub>1</sub>	A <sub>1</sub>	B <sub>1</sub>						
12	50	55	8	9	4	14	M5 x 0.8	10.5		
16	53	58	10	10	5	15.5	M6 x 1.0	12		
20	63	73	13	12	5	18.5	M8 x 1.25	14		
25	74	84	17	15	6	22.5	M10 x 1.25	17.5		

**Basic Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B															
12	5 to 30	29	22	34	27	6	6	25	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16	5 to 30	29	22	34	27	8	8	29	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20	5 to 50	35	26	45	36	7	10	36	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	8	10	7	1
25	5 to 50	39	29	49	39	12	12	40	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	9	10	7	1

Note 1) For basic type  $\phi 20$  and  $\phi 25$  with 5 stroke, through-hole is threaded over the entire length.

Note 2) Rubber bumper type has the same dimensions as those indicated above


Note 3) The positions of width across flats on both sides are not the same.

\* For details about the rod end nut and accessory brackets, refer to page 809.

# CQSW Series

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

## Foot type: CQSWL/CDQSWL

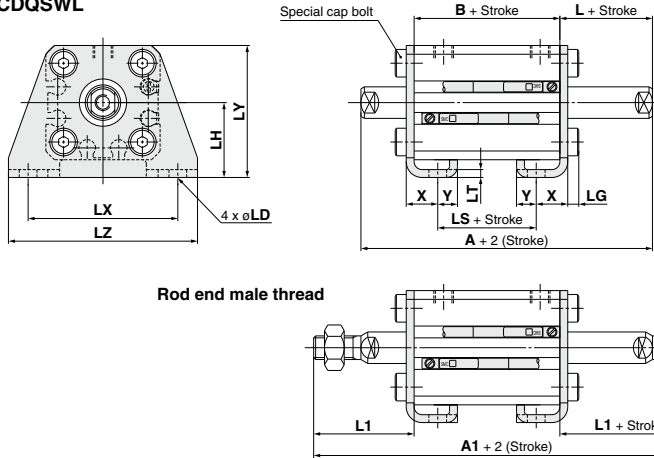


## Foot Type

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS											
12	5 to 30	49	70	22	10	54	75	27	15	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	49	73	22	10	54	78	27	15	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	55	83	26	14	65	93	36	24	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	59	94	29	14	69	104	39	24	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

## Compact foot type: CQSWLC/CDQSWLC

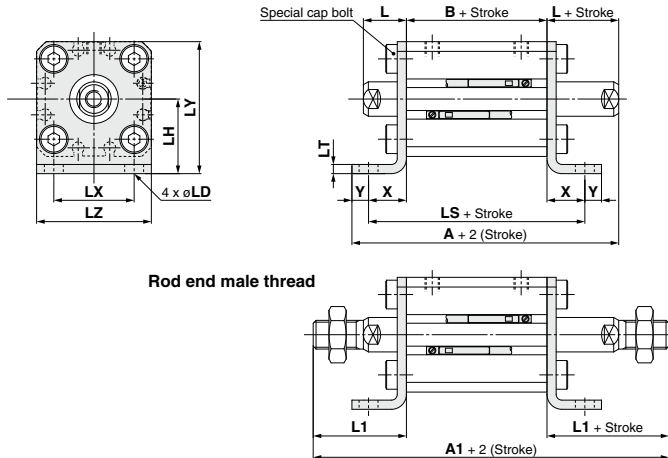

## Compact Foot Type


Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS										
12	5 to 30	49.3	70	22	40.6	54.3	75	27	45.6	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	5 to 30	49.8	73	22	40.6	54.8	78	27	45.6	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	5 to 50	59.5	83	26	52.4	69.5	93	36	62.4	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	5 to 50	63	94	29	55.4	73	104	39	65.4	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

\* For details about the rod end nut and accessory brackets, refer to page 809.

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

Flange type: CQSWF/CDQSWF

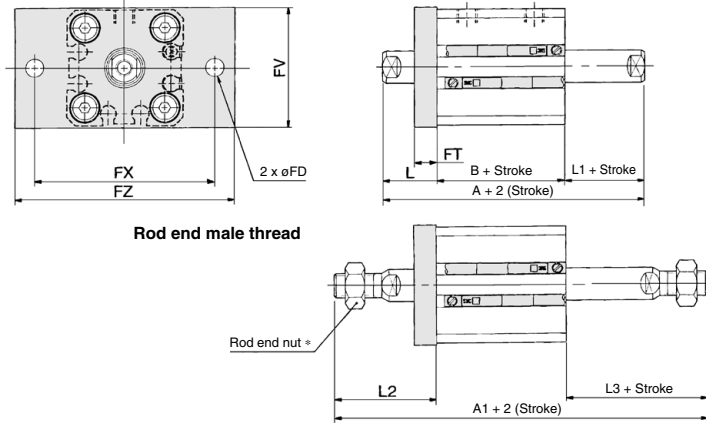

**Flange Type**

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			FD	FT	FV	FX	FZ	L	L1	L2	L3
		A	A1	B	A	A1	B									
12	5 to 30	39	60	22	44	65	27	4.5	5.5	25	45	55	13.5	3.5	24	14
16	5 to 30	39	63	22	44	68	27	4.5	5.5	30	45	55	13.5	3.5	25.5	15.5
20	5 to 50	45	73	26	55	83	36	6.6	8	39	48	60	14.5	4.5	28.5	18.5
25	5 to 50	49	84	29	59	94	39	6.6	8	42	52	64	15	5	32.5	22.5

\* For details about the rod end nut and accessory brackets, refer to page 899.  
 Note 1) The positions of width across flats on both sides are not the same.

Flange bracket material: Carbon steel  
 Surface treatment: Nickel plated

# Compact Cylinder: Standard Type Single Acting, Single Rod

## CQS Series

∅12, ∅16, ∅20, ∅25

### How to Order

**With auto switch** CQS B 20 - 10 S □ - □

**With auto switch** CDQS B 20 - 10 S □ - M9BWW □ - □

**Mounting type**

B	Through-hole/Both ends tapped common (Standard)
L	Foot type
LC	Compact foot type
F	Rod side flange type
G	Head side flange type
D	Double clevis type

**Bore size**

12	12 mm
16	16 mm
20	20 mm
25	25 mm

**Cylinder stroke (mm)**

Standard Stroke	
Bore size (mm)	Standard stroke (mm)
12, 16, 20, 25	5, 10

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Auto switch**

Nil	Without auto switch
-----	---------------------

**Body option**

Nil	Standard (Rod end female thread)
M	Rod end male thread
F	Boss on head end

**Action**

S	Single acting, Spring return
T	Single acting, Spring extend

**Built-in Magnet Cylinder Model**

Refer to page 819 for details.

\* Mounting brackets are shipped together (but not assembled).  
\* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQS" on page 820.

\* Refer to the table below for the applicable auto switch model.

\* Combination of body options is available. FM

### Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)			Pre-wired connector	Applicable load
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)		
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9NV (M9N)	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)			M9PV (M9P)	●	●	○	○		
				2-wire	M9BV (M9B)	●	●	○	○				
				3-wire (NPN)	M9NWV (M9NW)	●	●	○	○				
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (PNP)	5 V, 12 V	—	M9PWV (M9PW)	●	●	○	○	IC circuit	Relay, PLC
				2-wire			M9BWW (M9BW)	●	●	○	○		
				3-wire (NPN)	M9NAV*1	○	○	○	○				
				3-wire (PNP)	M9PAV*1	○	○	○	○				
Water resistant (2-color indicator)	Grommet	Yes	2-wire	5 V, 12 V	—	M9BAV*1	○	○	○	○	IC circuit	Relay, PLC	
			3-wire (NPN)			M9NAV*1	○	○	○	○			
			3-wire (PNP)	M9PAV*1	○	○	○	○					
			2-wire	M9BAV*1	○	○	○	○					
Reed auto switch	—	Grommet	No	3-wire (NPN equivalent)	—	5 V	A96V	●	—	—	—	IC circuit	—
				2-wire			A93V*2	●	●	●	—		
				2-wire	24 V	12 V	A90V	●	—	—	—		

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

\* Consult with SMC regarding water resistant types with the above model numbers.

\* 2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... Nil (Example) M9NWV  
1 m..... M (Example) M9NWWV  
3 m..... L (Example) M9NWWL  
5 m..... Z (Example) M9NWWVZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

\* Auto switches are shipped together (not assembled).

Note 1) There is the case D-A9□V/M9□V/M9□V/M9□V type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Note 2) The D-M9□□□ (in-line entry) type auto switch in ( ) cannot be mounted due to the manufacturable stroke. When this auto switch satisfies the conditions stated in Note 3) on page 853, it can be ordered separately.



**Symbol**

Single acting,  
Spring return

Single acting,  
Spring extend



**Made to Order:  
Individual Specifications**  
(For details, refer to pages 854 and 856.)

Symbol	Specifications
-X271	Fluororubber seals

**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB10	Intermediate stroke (Using exclusive body), Extension type only
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-XC36	With boss on rod side, ø12 and ø16 only
-XC85	Grease for food processing equipment

**Body Option**

Description	Application
Rod end male thread	Available for all standard models of single acting, single rod.

**Mounting Bracket Part No.**

Bore size (mm)	Foot (1)	Compact foot (1)	Flange	Double clevis
12	CQS-L012	CQS-LC012	CQS-F012	CQS-D012
16	CQS-L016	CQS-LC016	CQS-F016	CQS-D016
20	CQS-L020	CQS-LC020	CQS-F020	CQS-D020
25	CQS-L025	CQS-LC025	CQS-F025	CQS-D025

Note 1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.  
Foot, Compact foot, Flange type: Body mounting bolt  
Double clevis type: Clevis pin, Type C retaining ring  
for axis, Body mounting bolt.

**Moisture Control Tube  
IDK Series**



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.

Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [Web Catalog](#).

**Standard Specifications**

Bore size (mm)	12	16	20	25
<b>Action</b>	Single acting, Single rod			
<b>Fluid</b>	Air			
<b>Lubrication</b>	Not required (Non-lube)			
<b>Proof pressure</b>	1.5 MPa			
<b>Maximum operating pressure</b>	1.0 MPa			
<b>Minimum operating pressure</b>	0.25 MPa		0.18 MPa	
<b>Ambient and fluid temperature</b>	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
<b>Cushion</b>	None			
<b>Rod end thread</b>	Female thread			
<b>Stroke length tolerance</b>	+1.0 mm 0			
<b>Piston speed</b>	50 to 500 mm/s			
<b>Allowable kinetic energy (J)</b>	0.022	0.038	0.055	0.09

**Theoretical Output**

Action	Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)			Spring reaction force (N)	
					0.3	0.5	0.7	Secondary	primary
Spring return	12	6	IN	—	20	43	65	14	4
			OUT	113	—	—	—	—	—
	16	8	IN	—	45	86	126	15	6
			OUT	201	—	—	—	—	—
	20	10	IN	—	78	141	204	15	6
			OUT	314	—	—	—	—	—
25	12	IN	—	126	224	323	21	11	
		OUT	491	—	—	—	—	—	
Spring extend	12	6	IN	84.8	14	31	48	10	3
			OUT	—	—	—	—	—	—
	16	8	IN	151	24	54	85	19	4
			OUT	—	—	—	—	—	—
	20	10	IN	236	44	91	138	27	5
			OUT	—	—	—	—	—	—
25	12	IN	378	84	160	235	29	10	
		OUT	—	—	—	—	—	—	

**Manufacture of Intermediate Stroke**

(Single acting, Spring retract type is excluded.)

Description	Spacer is installed in the standard stroke body.	
Part no.	Refer to "How to Order" for the standard model no. (page 818).	
Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.	
Stroke range	Bore size	Stroke range
	12 to 25	1 to 9
Example	Part no.: CQSB20-3T CQSB20-5T with 2 mm width spacer inside. B dimension is 24.5 mm.	

Refer to pages 852 to 853 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke

# CQS Series

## Weight/Without Auto Switch Spring return (Spring extend) (g)

Bore size (mm)	Cylinder stroke (mm)	
	5	10
12	29 (31)	36 (37)
16	39 (39)	48 (47)
20	63 (68)	76 (79)
25	92 (98)	108 (113)

\* ( ): Denotes the values of spring extend.

## Weight/With Auto Switch (Built-in magnet) Spring return (Spring extend) (g)

Bore size (mm)	Cylinder stroke (mm)	
	5	10
12	37 (39)	44 (45)
16	49 (51)	58 (59)
20	94 (104)	107 (115)
25	130 (150)	146 (165)

\* ( ): Denotes the values of spring extend.

## Additional Weight

Bore size (mm)	(g)				
	12	16	20	25	
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Foot type (Including mounting bolt)	55	65	159	181	
Compact foot type (Including mounting bolt)	41	51	121	140	
Rod side flange type (Including mounting bolt)	58	70	143	180	
Head side flange type (Including mounting bolt)	56	66	137	171	
Double clevis type (Including pin, retaining ring, bolt)	34	40	92	127	

Calculation: (Example) CQSG16-10S

- Cylinder weight: CQSB16-10S.....48 g
  - Additional weight: Head side flange type.....66 g
- 114 g

## Mounting Bolt for CQS without Auto Switch


Mounting method: Mounting bolt for through-hole mounting type of CQS is available as an option.

Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x25L 4 pcs.**

**Single acting, Spring return**

**Single acting, Spring extend**

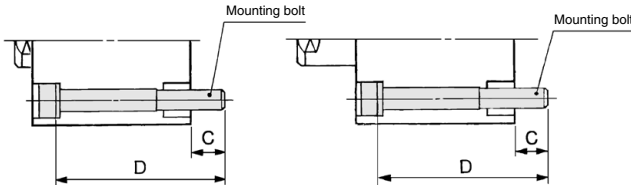

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

## Mounting Bolt for CDQS with Auto Switch


Mounting method: Mounting bolt for through-hole mounting type of CDQS is available as an option.

Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x30L 4 pcs.**

**Single acting, Spring return**

**Single acting, Spring extend**

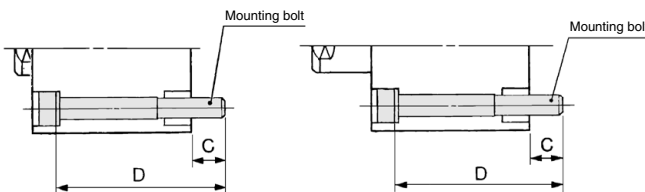

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

## ⚠ Caution

### Retaining Ring Installation/Removal

1. For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
2. Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installation.

### Single Acting, Spring Return

Cylinder model	C	D	Mounting bolt part no.
CQSB12-5S	6.5	25	CQ-M3 x 25L
		30	x 30L
CQSB16-5S	6.5	25	CQ-M3 x 25L
		30	x 30L
CQSB20-5S	6.5	25	CQ-M5 x 25L
		30	x 30L
CQSB25-5S	8.5	30	CQ-M5 x 30L
		35	x 35L

### Single Acting, Spring Extend

Cylinder model	C	D	Mounting bolt part no.
CQSB12-5T	6.5	25	CQ-M3 x 25L
		30	x 30L
CQSB16-5T	6.5	25	CQ-M3 x 25L
		30	x 30L
CQSB20-5T	6.5	25	CQ-M5 x 25L
		30	x 30L
CQSB25-5T	8.5	30	CQ-M5 x 30L
		35	x 35L

Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated

### Single Acting, Spring Return

Cylinder model	C	D	Mounting bolt part no.
CDQSB12-5S	6.5	30	CQ-M3 x 30L
		35	x 35L
CDQSB16-5S	6.5	30	CQ-M3 x 30L
		35	x 35L
CDQSB20-5S	6.5	35	CQ-M5 x 35L
		40	x 40L
CDQSB25-5S	8.5	40	CQ-M5 x 40L
		45	x 45L

### Single Acting, Spring Extend


Cylinder model	C	D	Mounting bolt part no.
CDQSB12-5T	6.5	30	CQ-M3 x 30L
		35	x 35L
CDQSB16-5T	6.5	30	CQ-M3 x 30L
		35	x 35L
CDQSB20-5T	6.5	35	CQ-M5 x 35L
		40	x 40L
CDQSB25-5T	8.5	40	CQ-M5 x 40L
		45	x 45L

Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated




## Construction


### Single acting, Spring return




### Single acting, Spring return/With auto switch (Built-in magnet) ø12, 16




ø20, 25

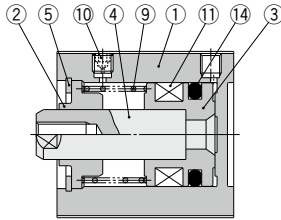


### Single acting, Spring extend

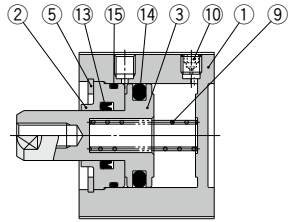

### Single acting, Spring extend/With auto switch (Built-in magnet) ø12, 16

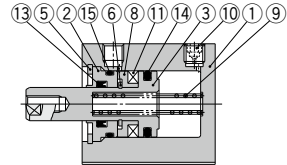

ø20, 25

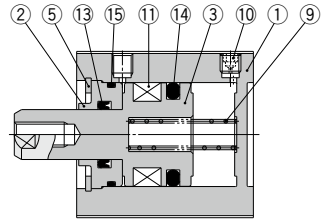

## Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Single acting, Spring return
		Stainless steel	Single acting, Spring extend
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Retaining ring	Carbon tool steel	Nickel plated
7	Rod end nut	Carbon steel	Zinc chromated
8	Spacer for switch type	Aluminum alloy	Chromated
9	Return spring	Piano wire	Zinc chromated
10	Plug with fixed orifice	Alloy steel	Nickel plated
11	Magnet	—	
12	Centering location ring	Aluminum alloy	Anodized
13*	Rod seal	NBR	
14*	Piston seal	NBR	
15*	Tube gasket	NBR	

## Replacement Parts/Seal Kit Single acting, Spring return


Bore size (mm)	Kit no.	Contents
12	CQSB12-S-PS	Set of nos. above ⑬
16	CQSB16-S-PS	
20	CQSB20-S-PS	
25	CQSB25-S-PS	

\* Seal kit includes ⑬. Order the seal kit, based on each bore size.  
\* Since the seal kit does not include a grease pack, order it separately.  
Grease pack part no.: GR-S-010 (10 g)

## Rod end male thread

Single acting, Spring return  
Single acting, Spring extend

With boss on head end

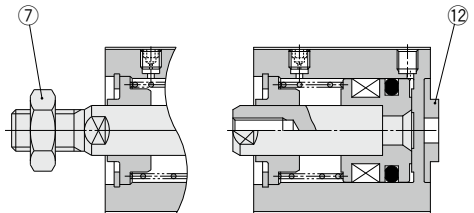

## Replacement Parts/Seal Kit Single acting, Spring extend

Bore size (mm)	Kit no.	Contents
12	CQSB12-T-PS	Set of nos. above ⑬, ⑭, ⑮
16	CQSB16-T-PS	
20	CQSB20-T-PS	
25	CQSB25-T-PS	


\* Seal kit includes ⑬, ⑭, ⑮. Order the seal kit, based on each bore size.  
\* Since the seal kit does not include a grease pack, order it separately.  
Grease pack part no.: GR-S-010 (10 g)

# CQS Series


## Dimensions: $\phi 12$ to $\phi 25$ /Single Acting, Spring Return

### Basic type (Through-hole/Both ends tapped common): CQSB/CDQSB


$\phi 12$




$\phi 16$

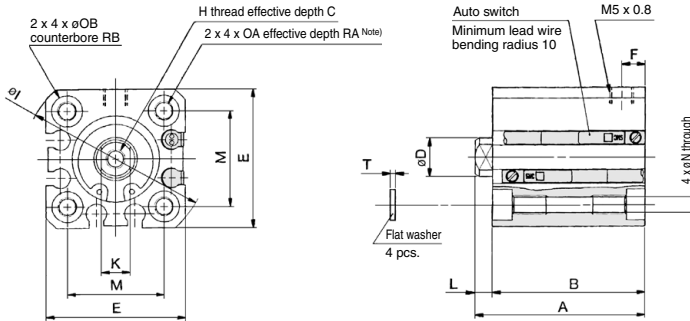


$\phi 20, \phi 25$



### Rod end male thread



### With boss on head end

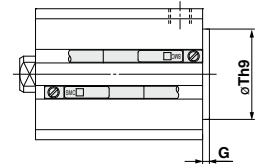

### Rod End Male Thread

Bore size (mm)	B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

### With Boss on Head End (mm)

Bore size (mm)	G	Th9
12	1.5	15 <sup>0</sup> <sub>-0.043</sub>
16	1.5	20 <sup>0</sup> <sub>-0.052</sub>
20	2	13 <sup>0</sup> <sub>-0.043</sub>
25	2	15 <sup>0</sup> <sub>-0.043</sub>

Note) With boss on rod end : Option (Suffix \*-XC36\* to the end of part number.)

### Basic Type

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				C	D	E	F	H	I	K	L	M	N	OA	OB	RA	RB	T
		A	B	A	B																			
		5 <sup>ST</sup>	10 <sup>ST</sup>	5 <sup>ST</sup>	10 <sup>ST</sup>	5 <sup>ST</sup>	10 <sup>ST</sup>	5 <sup>ST</sup>	10 <sup>ST</sup>															
12	5, 10	25.5	30.5	22	27	30.5	35.5	27	32	6	6	25	5	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7	4	0.5
16		25.5	30.5	22	27	30.5	35.5	27	32	8	8	29	5	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7	4	0.5
20		29	34	24.5	29.5	39	44	34.5	39.5	7	10	36	5.5	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	10	7	1
25		32.5	37.5	27.5	32.5	42.5	47.5	37.5	42.5	12	12	40	5.5	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	10	7	1

Note) For basic type  $\phi 12$  and  $\phi 16$  with 5 stroke, through-hole is threaded over the entire length.


For basic type  $\phi 20, \phi 25$  with 5 and 10 stroke, through-hole is threaded over the entire length.

With auto switch (Built-in magnet)/ $\phi 20$ ; 5 stroke.

\* For details about the rod end nut and accessory brackets, refer to page 809.

**Dimensions:  $\varnothing 12$  to  $\varnothing 25$ /Single Acting, Spring Return**

**Foot type: CQSL/CDQSL**

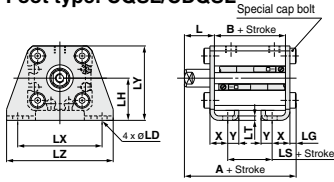


**Foot Type**


Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L <sub>1</sub>	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS											
12	5, 10	35.3	17	5	40.3	22	10	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16		35.3	17	5	40.3	22	10	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20		41.2	19.5	7.5	51.2	29.5	17.5	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25		44.7	22.5	7.5	54.7	32.5	17.5	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

**Rod end male thread**



**Compact foot type: CQSLC/CDQSLC**

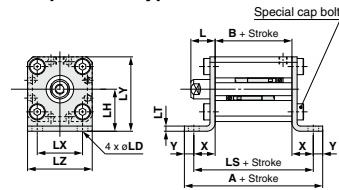


**Compact Foot Type**


Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L <sub>1</sub>	LD	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS										
12	5, 10	44.6	17	35.6	49.6	22	40.6	13.5	24	4.5	1.7	2	15.5	29.5	25	9.3	4.5
16		45.6	17	35.6	50.6	22	40.6	13.5	25.5	4.5	1.9	2	20	33.5	29	9.3	5
20		57.5	19.5	45.9	67.5	29.5	55.9	14.5	28.5	6.6	2.4	3.2	25.5	42	36	13.2	5.8
25		60.5	22.5	48.9	70.5	32.5	58.9	15	32.5	6.6	2.6	3.2	28	46	40	13.2	5.8

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

**Rod end male thread**



**Rod side flange type: CQSF/CDQSF**

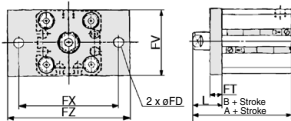


**Rod Side Flange Type**


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5, 10	30.5	17	35.5	22	4.5	5.5	25	45	55	13.5	24
16		30.5	17	35.5	22	4.5	5.5	30	45	55	13.5	25.5
20		34	19.5	44	29.5	6.6	8	39	48	60	14.5	28.5
25		37.5	22.5	47.5	32.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

**Rod end male thread**



**Head side flange type: CQSG/CDQSG**

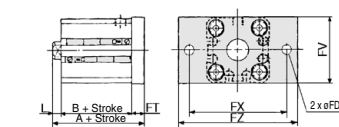


**Head Side Flange Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5, 10	26	17	31	22	4.5	5.5	25	45	55	3.5	14
16		26	17	31	22	4.5	5.5	30	45	55	3.5	15.5
20		32	19.5	42	29.5	6.6	8	39	48	60	4.5	18.5
25		35.5	22.5	45.5	32.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated


**Rod end male thread**




\* For details about the rod end nut and accessory brackets, refer to page 809.

## Dimensions: $\varnothing 12$ to $\varnothing 25$ /Single Acting, Spring Return

### Double clevis type: CQSD/CDQSD

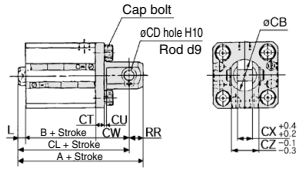

### Rod end male thread



### Double Clevis Type

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			CB	CD	CT	CU	CW	CX	CZ	L	L1	RR
		A	B	CL	A	B	CL										
12	5, 10	40.5	17	34.5	45.5	22	39.5	12	5	4	7	14	5	10	3.5	14	6
16		41.5	17	35.5	46.5	22	40.5	14	5	4	10	15	6.5	12	3.5	15.5	6
20		51	19.5	42	61	29.5	52	20	8	5	12	18	8	16	4.5	18.5	9
25		57.5	22.5	47.5	67.5	32.5	57.5	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel  
Surface treatment: Nickel plated


\* For details about the double clevis pivot bracket, refer to page 808.

\* For details about the rod end nut and accessory brackets, refer to page 809.


**Dimensions:  $\phi 12$  to  $\phi 25$ /Single Acting, Spring Extend**

**Basic type (Through-hole/Both ends tapped common): CQSB/CDQSB**


$\phi 12$




$\phi 16$

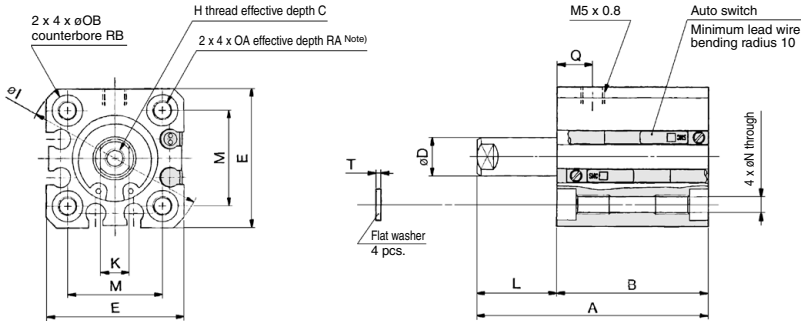


$\phi 20, \phi 25$



**Rod end male thread**

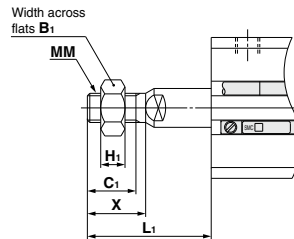

**With boss on head end**

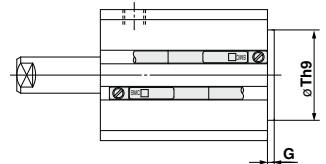

**Rod End Male Thread**

Bore size (mm)	B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>		MM	X
				5 <sup>ST</sup>	10 <sup>ST</sup>		
12	8	9	4	19	24	M5 x 0.8	10.5
16	10	10	5	20.5	25.5	M6 x 1.0	12
20	13	12	5	23.5	28.5	M8 x 1.25	14
25	17	15	6	27.5	32.5	M10 x 1.25	17.5

**With Boss on Head End (mm)**

Bore size (mm)	G	Th9
16	1.5	20 <sup>0</sup> <sub>-0.052</sub>
20	2	13 <sup>0</sup> <sub>-0.043</sub>
25	2	15 <sup>0</sup> <sub>-0.043</sub>

Note) With boss on rod end : Option (Suffix \*-XC36\* to the end of part number.)

**Basic Type**

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				C	D	E	H	I	K	L		M	N	OA	OB	Q	RA	RB	T
		A	B	A	B	5 <sup>ST</sup>	10 <sup>ST</sup>																		
		5 <sup>ST</sup>	10 <sup>ST</sup>	5 <sup>ST</sup>	10 <sup>ST</sup>	5 <sup>ST</sup>	10 <sup>ST</sup>																		
12	5, 10	30.5	40.5	22	27	35.5	45.5	27	32	6	6	25	M3 x 0.5	32	5	8.5	13.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
		30.5	40.5	22	27	35.5	45.5	27	32	8	8	29	M4 x 0.7	38	6	8.5	13.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
		34	44	24.5	29.5	44	54	34.5	39.5	7	10	36	M5 x 0.8	47	8	9.5	14.5	25.5	5.4	M6 x 1.0	9	8	10	7	1
20		37.5	47.5	27.5	32.5	47.5	57.5	37.5	42.5	12	12	40	M6 x 1.0	52	10	10	15	28	5.4	M6 x 1.0	9	9	10	7	1
25																									


Note) For basic type  $\phi 12$  and  $\phi 16$  with 5 stroke, through-hole is threaded over the entire length.  
For basic type  $\phi 20, \phi 25$  with 5 and 10 stroke, through-hole is threaded over the entire length.  
With auto switch (Built-in magnet)/ $\phi 20; 5$  stroke.

\* For details about the rod end nut and accessory brackets, refer to page 809.


# CQS Series

## Dimensions: $\varnothing 12$ to $\varnothing 25$ /Single Acting, Spring Extend

### Foot type: CQSL/CDQSL

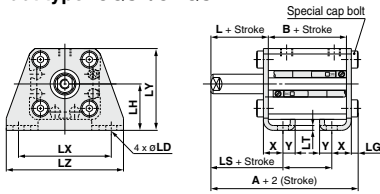

Rod end male thread




### Foot Type

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5, 10	35.3	17	5	40.3	22	10
16		35.3	17	5	40.3	22	10
20		41.2	19.5	7.5	51.2	29.5	17.5
25		44.7	22.5	7.5	54.7	32.5	17.5


Bore size (mm)	L	L <sub>1</sub>	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

### Compact foot type: CQSLC/CDQSLC

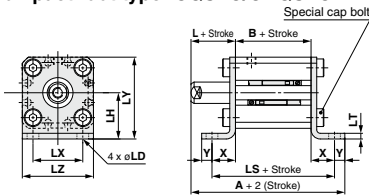

Rod end male thread




### Compact Foot Type

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5, 10	44.3	17	35.6	49.3	22	40.6
16		44.8	17	35.6	49.8	22	40.6
20		53	19.5	45.9	63	29.5	55.9
25		56.5	22.5	48.9	66.5	32.5	58.9


Bore size (mm)	L	L <sub>1</sub>	LD	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

### Rod side flange type: CQSF/CDQSF

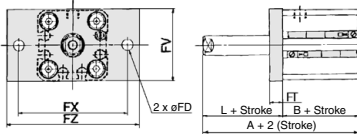

Rod end male thread




### Rod Side Flange Type


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5, 10	30.5	17	35.5	22	4.5	5.5	25	45	55	13.5	24
16		30.5	17	35.5	22	4.5	5.5	30	45	55	13.5	25.5
20		34	19.5	44	29.5	6.6	8	39	48	60	14.5	28.5
25		37.5	22.5	47.5	32.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

### Head side flange type: CQSG/CDQSG

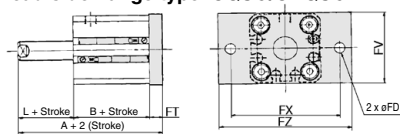

Rod end male thread



### Head Side Flange Type


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5, 10	26	17	31	22	4.5	5.5	25	45	55	3.5	14
16		26	17	31	22	4.5	5.5	30	45	55	3.5	15.5
20		32	19.5	42	29.5	6.6	8	39	48	60	4.5	18.5
25		35.5	22.5	45.5	32.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated


\* For details about the rod end nut and accessory brackets, refer to page 809.

**Dimensions:  $\varnothing 12$  to  $\varnothing 25$ /Single Acting, Spring Extend**

**Double clevis type: CQSD/CDQSD**

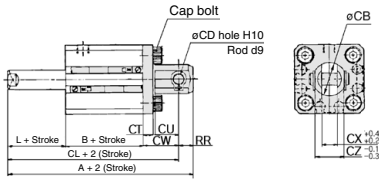

**Rod end male thread**



**Double Clevis Type**

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	CL	A	B	CL
12	5, 10	40.5	17	34.5	45.5	22	39.5
16		41.5	17	35.5	46.5	22	40.5
20		51	19.5	42	61	29.5	52
25		57.5	22.5	47.5	67.5	32.5	57.5

Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	L	L <sub>1</sub>	RR
12	12	5	4	7	14	5	10	3.5	14	6
16	14	5	4	10	15	6.5	12	3.5	15.5	6
20	20	8	5	12	18	8	16	4.5	18.5	9
25	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel  
Surface treatment: Nickel plated

\* For details about the double clevis pivot bracket, refer to page 808.

\* For details about the rod end nut and accessory brackets, refer to page 809.

# Compact Cylinder: Non-rotating Rod Type Double Acting, Single Rod

## CQSK Series

ø12, ø16, ø20, ø25

### How to Order

**CQSK** **B** **20** - **30** **D** **□** - **□**

**With auto switch** **CDQSK** **B** **20** - **30** **D** **□** - **M9BW** **□** - **□**

**With auto switch**  
(Built-in magnet)

**Mounting type**

<b>B</b>	Through-hole/Both ends tapped common (Standard)
<b>L</b>	Foot type
<b>LC</b>	Compact foot type
<b>F</b>	Rod side flange type
<b>G</b>	Head side flange type
<b>D</b>	Double clevis type

**Bore size**

<b>12</b>	12 mm
<b>16</b>	16 mm
<b>20</b>	20 mm
<b>25</b>	25 mm

**Number of auto switches**

<b>Nil</b>	2 pcs.
<b>S</b>	1 pc.
<b>n</b>	"n" pcs.

**Auto switch**

<b>Nil</b>	Without auto switch
------------	---------------------

\* Refer to the table below for the applicable auto switch model.

**Body option**

<b>Nil</b>	Standard (Rod end female thread)
<b>M</b>	Rod end male thread
<b>F</b>	Boss on head side

\* Combination of body options is available. FM

**Action**

<b>D</b>	Double acting
----------	---------------

**Built-in Magnet Cylinder Model**

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDQSKL25-30D

**Standard Stroke**

Bore size (mm)	Standard stroke (mm)
<b>12, 16</b>	5, 10, 15, 20, 25, 30
<b>20, 25</b>	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

For "Manufacture of Intermediate Strokes", refer to page 829.

**Mounting type**

**Bore size**

**Number of auto switches**

**Auto switch**

**Body option**

**Action**

**Built-in Magnet Cylinder Model**

### Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)			Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)			5 (Z)	
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	<b>M9NV</b>	<b>M9N</b>	●	●	●	○	IC circuit	Relay, PLC	
				3-wire (PNP)			<b>M9PV</b>	<b>M9P</b>	●	●	●	○			
				2-wire	12 V	<b>M9BV</b>	<b>M9B</b>	●	●	●	○				
				3-wire (NPN)		24 V	<b>M9NWV</b>	<b>M9NW</b>	●	●	●	○			
	3-wire (PNP)	5 V, 12 V	<b>M9PWV</b>	<b>M9PW</b>	●		●	●	○						
	2-wire		12 V	<b>M9BWW</b>	<b>M9BW</b>	●	●	●	○						
	3-wire (NPN)	5 V, 12 V		<b>M9NAV</b> <sup>*1</sup>	<b>M9NA</b> <sup>*1</sup>	○	○	○	○						
	3-wire (PNP)		12 V	<b>M9PAV</b> <sup>*1</sup>	<b>M9PA</b> <sup>*1</sup>	○	○	○	○						
Reed auto switch	—	Grommet		Yes	3-wire (NPN equivalent)	—	5 V	<b>A96V</b>	<b>A96</b>	●	—	—	—	IC circuit	—
			No		2-wire	24 V	12 V	100 V	<b>A93V</b> <sup>*2</sup>	<b>A93</b>	●	●	●	—	—
						100 V or less	<b>A90V</b>	<b>A90</b>	●	—	●	—	—	IC circuit	

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.  
Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW  
1 m..... M (Example) M9NWM  
3 m..... L (Example) M9NWL  
5 m..... Z (Example) M9NWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

\* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□WV/M9□AV type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.



# Compact Cylinder: Non-rotating Rod Type Double Acting, Single Rod **CQSK Series**



## Symbol

Without cushion



## Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of Rod End Shape
-XC6	Piston rod and rod end nut made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type

## Body Option

Description	Application
Rod end male thread	Available for all non-rotating rod type.

## Mounting Bracket Part No.

Bore size (mm)	Foot (1)	Compact foot (1)	Flange	Double clevis
12	CQSK-L012	CQSK-LC012	CQSK-F012	CQSK-D012
16	CQSK-L016	CQSK-LC016	CQSK-F016	CQSK-D016
20	CQSK-L020	CQSK-LC020	CQSK-F020	CQSK-D020
25	CQSK-L025	CQSK-LC025	CQSK-F025	CQSK-D025

Note 1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.  
 Foot, Compact foot, Flange type: Body mounting bolt  
 Double clevis type: Clevis pin, Type C retaining ring for axis, Body mounting bolt.

## Moisture Control Tube IDK Series




When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.

Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [Web Catalog](#).

## Standard Specifications

Bore size (mm)	12	16	20	25
Action	Double acting, Single rod			
Fluid	Air			
Lubrication	Not required (Non-lube)			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.07 MPa		0.05 MPa	
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
Cushion	None			
Rod end thread	Female thread			
Stroke length tolerance	+1.0 mm 0			
Piston speed	50 to 500 mm/s			
Allowable kinetic energy (J)	0.022	0.038	0.055	0.09
Rod non-rotating accuracy	±1°		±0.7°	

## Theoretical Output



Bore size (mm)	Rod width across flats (mm)	Action	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)		
				0.3	0.5	0.7
12	5.2	IN	90	27	45	63
		OUT	113	34	57	79
16	6.2	IN	168	50	84	117
		OUT	201	60	101	141
20	8.2	IN	256	77	128	179
		OUT	314	94	157	220
25	10.2	IN	401	120	200	281
		OUT	491	147	245	344

## Manufacture of Intermediate Stroke

Description	Spacer is installed in the standard stroke body.		
Part no.	Refer to "How to Order" for the standard model no. (page 828).		
Standard stroke	Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.	
	Stroke range	Bore size	Stroke range
		12, 16	1 to 29
Example	20, 25	1 to 49	
	Part no.: CQSKB25-47D CQSKB25-50D with 3 mm width spacer inside. B dimension is 77.5 mm.		

Refer to pages 852 and 853 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke

# CQSK Series

## Weight/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
<b>12</b>	39	46	53	60	67	74	–	–	–	–
<b>16</b>	52	61	69	78	86	95	–	–	–	–
<b>20</b>	89	102	116	129	143	156	170	183	197	211
<b>25</b>	124	141	157	174	190	207	224	240	257	273

Calculation: (Example) **CQSKF20-5DM**

- Cylinder weight: CQSKB20-5D..... 89 g
  - Additional weight: Rod end male thread..... 10 g
  - : Rod side flange type .....142 g
- 
- 241 g

## Weight/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
<b>12</b>	47	54	62	69	76	83	–	–	–	–
<b>16</b>	63	71	80	88	97	106	–	–	–	–
<b>20</b>	122	136	149	163	176	190	203	217	230	244
<b>25</b>	168	185	201	218	235	251	268	284	301	317

## Additional Weight


(g)

Bore size (mm)		<b>12</b>	<b>16</b>	<b>20</b>	<b>25</b>
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
With boss on head end		0.7	1.3	2	3
Foot type (Including mounting bolt)		55	64	158	179
Compact foot type (Including mounting bolt)		41	51	121	140
Rod side flange type (Including mounting bolt)		58	69	142	178
Head side flange type (Including mounting bolt)		56	66	137	171
Double clevis type (Including pin, retaining ring, bolt)		34	40	92	127

## Construction


### Basic type

ø12




### With auto switch (Built-in magnet)


ø12

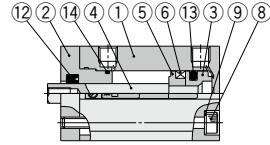

ø16, ø20, ø25

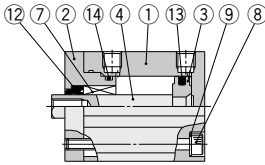



ø16

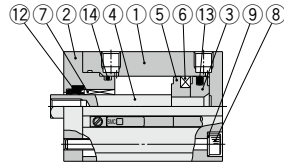

### Rod end male thread

### With boss on head end

ø20, ø25

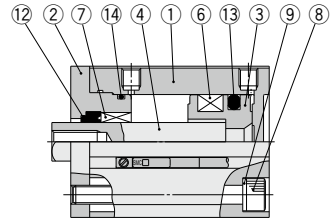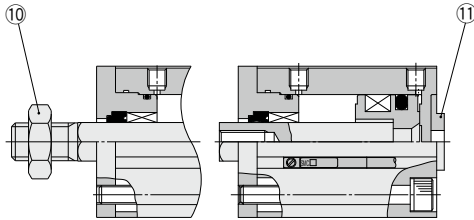

### Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Rod cover	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	
5	Spacer for switch type	Aluminum alloy	Chromated
6	Magnet	—	
7	Non-rotating guide	Oil impregnated sintered alloy	ø16, ø20 and ø25
8	Hexagon socket head cap screw	Alloy steel	Nickel plated
9	Plain washer	Rolled steel	Nickel plated
10	Rod end nut	Carbon steel	Zinc chromated
11	Centering location ring	Aluminum alloy	Anodized
12*	Rod seal	NBR	
13*	Piston seal	NBR	
14*	Tube gasket	NBR	

### Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSKB12-PS	Set of nos. above ⑫, ⑬, ⑭.
16	CQSKB16-PS	
20	CQSKB20-PS	
25	CQSKB25-PS	

\* Seal kit includes ⑫, ⑬, ⑭. Order the seal kit, based on each bore size.

\* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

## ⚠ Precautions


### Operating Precautions

#### ⚠ Caution

- Any kind of operation producing rotational torque to piston rod must be considered. The non-rotating guide would be deformed and the accuracy would be compromised. Refer to the table below for rotation torque allowance.

Allowable rotational torque (N·m) or less	ø12	ø16	ø20	ø25
	0.04	0.04	0.2	0.25

- Load to piston rod must always be in an axial direction.
- When a workpiece is secured to the end of the piston rod, ensure that the piston rod is retracted entirely, and place a wrench on the portion of the rod that protrudes beyond the section. Also, tighten by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.



# CQSK Series


## Mounting Bolt for CQSK

Mounting method: Mounting bolt for through-hole mounting type of CQSK is available as an option.


Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x25L 2 pcs.**

### Head side mounting type

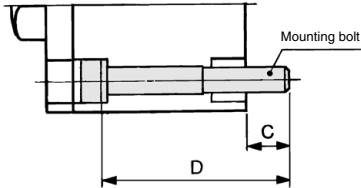

### Rod side mounting type

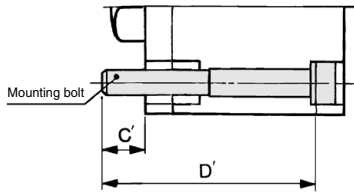

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
<b>CQSKB12-5D</b>	6.5	25	CQ-M3 x 30L	6.5	30	CQ-M3 x 30L
-10D		30	x 35L		35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
<b>CQSKB16-5D</b>	6.5	25	CQ-M3 x 25L	6.5	30	CQ-M3 x 30L
-10D		30	x 30L		35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
<b>CQSKB20-5D</b>	6.5	25	CQ-M5 x 25L	6.5	30	CQ-M5 x 30L
-10D		30	x 30L		35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
-35D	55	x 55L	60	x 60L		
-40D	60	x 60L	65	x 65L		
-45D	65	x 65L	70	x 70L		
-50D	70	x 70L	75	x 75L		
<b>CQSKB25-5D</b>	8.5	30	CQ-M5 x 30L	8.5	35	CQ-M5 x 35L
-10D		35	x 35L		40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
-35D	60	x 60L	65	x 65L		
-40D	65	x 65L	70	x 70L		
-45D	70	x 70L	75	x 75L		
-50D	75	x 75L	80	x 80L		

Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated


## Mounting Bolt for CDQSK

Mounting method: Mounting bolt for through-hole mounting type of CDQSK is available as an option.


Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x30L 2 pcs.**

### Head side mounting type

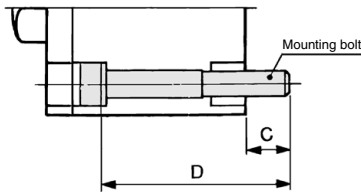

### Rod side mounting type

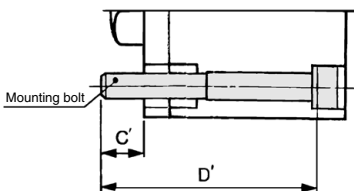

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
<b>CDQSKB12-5D</b>	6.5	30	CQ-M3 x 30L	6.5	35	CQ-M3 x 35L
-10D		35	x 35L		40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
<b>CDQSKB16-5D</b>	6.5	30	CQ-M3 x 30L	6.5	35	CQ-M3 x 35L
-10D		35	x 35L		40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
<b>CDQSKB20-5D</b>	6.5	35	CQ-M5 x 35L	6.5	40	CQ-M5 x 40L
-10D		40	x 40L		45	x 45L
-15D		45	x 45L		50	x 50L
-20D		50	x 50L		55	x 55L
-25D		55	x 55L		60	x 60L
-30D		60	x 60L		65	x 65L
-35D	65	x 65L	70	x 70L		
-40D	70	x 70L	75	x 75L		
-45D	75	x 75L	80	x 80L		
-50D	80	x 80L	85	x 85L		
<b>CDQSKB25-5D</b>	8.5	40	CQ-M5 x 40L	8.5	45	CQ-M5 x 45L
-10D		45	x 45L		50	x 50L
-15D		50	x 50L		55	x 55L
-20D		55	x 55L		60	x 60L
-25D		60	x 60L		65	x 65L
-30D		65	x 65L		70	x 70L
-35D	70	x 70L	75	x 75L		
-40D	75	x 75L	80	x 80L		
-45D	80	x 80L	85	x 85L		
-50D	85	x 85L	90	x 90L		


Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated

**Dimensions:  $\phi 12$  to  $\phi 25$**

**Basic type (Through-hole/Both ends tapped common): CQSK/CDQSK**



\* For the auto switch mounting position and its mounting height, refer to page 852.

$\phi 12$




$\phi 16$


2 x 2 x  $\phi$ OB counterbore  
2 x 2 x OA  
effective depth RA (Note)

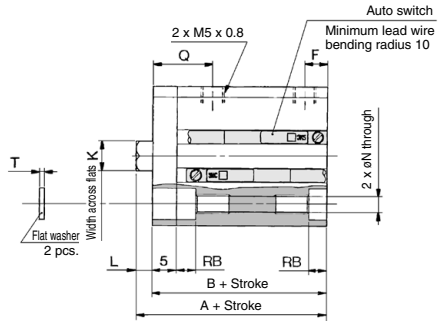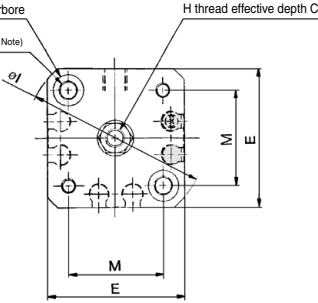


$\phi 20, \phi 25$



**Rod end male thread**

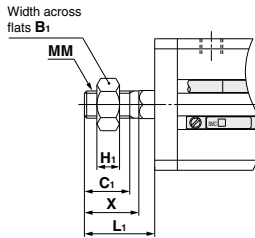

**With boss on head end**

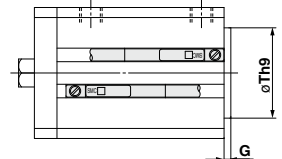

**Rod End Male Thread**

Bore size (mm)	B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

**With Boss on Head End (mm)**

Bore size (mm)	G	Th9
12	1.5	15 <sup>0</sup> <sub>-0.043</sub>
16	1.5	20 <sup>0</sup> <sub>-0.052</sub>
20	2	13 <sup>0</sup> <sub>-0.043</sub>
25	2	15 <sup>0</sup> <sub>-0.043</sub>

**Basic Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	E	F	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B															
12	5 to 30	25.5	22	30.5	27	6	25	5	M3 x 0.5	32	5.2	3.5	15.5	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
16	5 to 30	25.5	22	30.5	27	8	29	5	M4 x 0.7	38	6.2	3.5	20	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
20	5 to 50	29	24.5	39	34.5	7	36	5.5	M5 x 0.8	47	8.2	4.5	25.5	5.4	M6 x 1.0	9	13	10	7	1
25	5 to 50	32.5	27.5	42.5	37.5	12	40	5.5	M6 x 1.0	52	10.2	5	28	5.4	M6 x 1.0	9	14	10	7	1

Note) For basic type  $\phi 12$  and  $\phi 16$  with 5 stroke, through-hole is threaded over the entire length.

For basic type  $\phi 20$  with 5 to 15 stroke, through-hole is threaded over the entire length.

For basic type  $\phi 25$  with 5 and 10 stroke, through-hole is threaded over the entire length.


Note) With auto switch (Built-in magnet):  $\phi 20$ ; 5 stroke

\* For details about the rod end nut and accessory brackets, refer to page 809.

# CQSK Series

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

## Foot type: CQSKL/CDQSKL

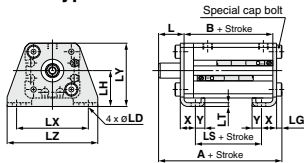


### Foot Type


Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L <sub>1</sub>	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS											
12	5 to 30	40.3	22	10	45.3	27	15	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	40.3	22	10	45.3	27	15	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	46.2	24.5	12.5	56.2	34.5	22.5	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	49.7	27.5	12.5	59.7	37.5	22.5	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

## Rod end male thread



## Compact foot type: CQSKLC/CDQSKLC

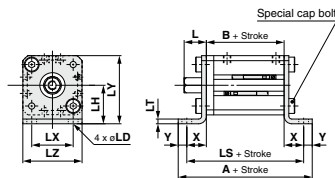

### Compact Foot Type


Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L <sub>1</sub>	LD	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS										
12	5 to 30	49.6	22	40.6	54.6	27	45.6	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	5 to 30	50.6	22	40.6	55.6	27	45.6	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	5 to 50	62.5	24.5	50.9	72.5	34.5	60.9	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	5 to 50	65.5	27.5	53.9	75.5	37.5	63.9	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

## Rod end male thread



## Rod side flange type: CQSKF/CDQSKF

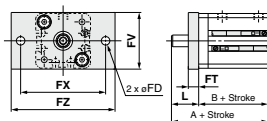


### Rod Side Flange Type


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5 to 30	35.5	22	40.5	27	4.5	5.5	25	45	55	13.5	24
16	5 to 30	35.5	22	40.5	27	4.5	5.5	30	45	55	13.5	25.5
20	5 to 50	39	24.5	49	34.5	6.6	8	39	48	60	14.5	28.5
25	5 to 50	42.5	27.5	52.5	37.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

## Rod end male thread



## Head side flange type: CQSKG/CDQSKG

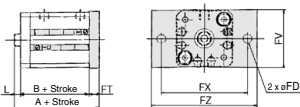


### Head Side Flange Type

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L <sub>1</sub>
		A	B	A	B							
12	5 to 30	31	22	36	27	4.5	5.5	25	45	55	3.5	14
16	5 to 30	31	22	36	27	4.5	5.5	30	45	55	3.5	15.5
20	5 to 50	37	24.5	47	34.5	6.6	8	39	48	60	4.5	18.5
25	5 to 50	40.5	27.5	50.5	37.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated


## Rod end male thread




\* For details about the rod end nut and accessory brackets, refer to page 809.

**Dimensions:  $\varnothing 12$  to  $\varnothing 25$**

**Double clevis type:  
 CQSKD/CDQSKD**

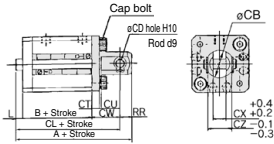

**Rod end male thread**



**Double Clevis Type**

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			CB	CD	CT	CU	CW	CX	CZ	L	L <sub>1</sub>	RR
		A	B	CL	A	B	CL										
12	5 to 30	45.5	22	39.5	50.5	27	44.5	12	5	4	7	14	5	10	3.5	14	6
16	5 to 30	46.5	22	40.5	51.5	27	45.5	14	5	4	10	15	6.5	12	3.5	15.5	6
20	5 to 50	56	24.5	47	66	34.5	57	20	8	5	12	18	8	16	4.5	18.5	9
25	5 to 50	62.5	27.5	52.5	72.5	37.5	62.5	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel  
 Surface treatment: Nickel plated


- \* For details about the double clevis pivot bracket, refer to page 809.
- \* For details about the rod end nut and accessory brackets, refer to page 899.

# Compact Cylinder: Non-rotating Rod Type Double Acting, Double Rod

## CQSKW Series

ø12, ø16, ø20, ø25

### How to Order

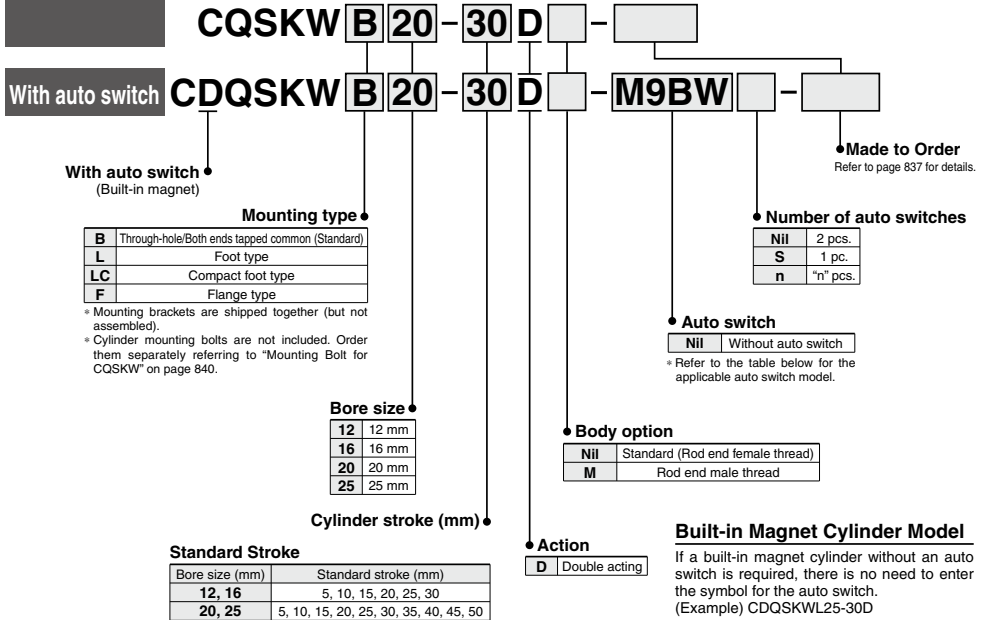

### Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicate light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)			Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil) (M)	1 (L)	3 (Z)			5 (Z)	
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	IC circuit	
				3-wire (PNP)				M9PV	M9P	●	●	○	○		
				2-wire	M9BV	M9B	●	●	○	○	—				
	3-wire (NPN)			M9NVW	M9NW	●	●	○	○	IC circuit					
	3-wire (PNP)			M9PVW	M9PW	●	●	○	○						
	2-wire			M9BWW	M9BW	●	●	○	○						
	Water resistant (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NAV <sup>*1</sup>	M9NA <sup>*1</sup>	○	○	●	○	IC circuit	
				3-wire (PNP)				M9PAV <sup>*1</sup>	M9PA <sup>*1</sup>	○	○	●	○		
				2-wire	M9BAV <sup>*1</sup>	M9BA <sup>*1</sup>	○	○	○	○	—				
Reed auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	100 V or less	A96V	A96	●	—	●	—	IC circuit	—
				2-wire				A93V <sup>*2</sup>	A93	●	●	●	●	—	
			No	2-wire				A90V	A90	●	—	●	—	IC circuit	

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... Nil (Example) M9NV  
1 m..... M (Example) M9NVW  
3 m..... L (Example) M9NWL  
5 m..... Z (Example) M9NVWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

\* Auto switches are shipped together (not assembled).


Note) There is the case D-A9CIV/M9CIV/M9CIVW/M9CIV type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.





**Symbol**

Without cushion



**Made to Order:**  
**Individual Specifications**  
(For details, refer to page 855)

Symbol	Specifications
-X633	Intermediate stroke of double rod cylinder

**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel

**Body Option**

Description	Application
Rod end male thread	Available for all non-rotating rod type.

**Mounting Bracket Part No.**

Bore size (mm)	Foot <sup>(1)</sup>	Compact foot <sup>(1)</sup>	Flang
12	CQSK-L012	CQSK-LC012	CQSK-F012
16	CQSK-L016	CQSK-LC016	CQSK-F016
20	CQSK-L020	CQSK-LC020	CQSK-F020
25	CQSK-L025	CQSK-LC025	CQSK-F025

Note 1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.  
Note 2) Parts belonging to each bracket are as follows.  
Foot, Compact foot, Flange type: Body mounting bolt

**Moisture Control Tube IDK Series**



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.  
Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [Web Catalog](#).

**Specifications**

Bore size (mm)	12	16	20	25
<b>Action</b>	Double acting, Single rod			
<b>Fluid</b>	Air			
<b>Lubrication</b>	Not required (Non-lube)			
<b>Proof pressure</b>	1.5 MPa			
<b>Maximum operating pressure</b>	1.0 MPa			
<b>Minimum operating pressure</b>	0.07 MPa		0.05 MPa	
<b>Ambient and fluid temperature</b>	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
<b>Cushion</b>	None			
<b>Rod end thread</b>	Female thread			
<b>Stroke length tolerance</b>	$\begin{matrix} +1.0 \text{ mm} \\ 0 \end{matrix}$			
<b>Piston speed</b>	50 to 500 mm/s			
<b>Allowable kinetic energy (J)</b>	0.022	0.038	0.055	0.09
<b>Rod non-rotating accuracy</b>	$\pm 1^\circ$		$\pm 0.7^\circ$	

**Theoretical Output**

Bore size (mm)	Rod width across flats (mm)	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)		
			0.3	0.5	0.7
12	5.2	90	27	45	63
16	6.2	168	50	84	117
20	8.2	256	77	128	179
25	10.2	401	120	200	281

**Manufacture of Intermediate Stroke**

Description	Spacer is installed in the standard stroke body.	
Part no.	Suffix "-X633" to the end of standard model no. (page 810).	
Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.	
Stroke range	Bore size	Stroke range
	12, 16	6 to 29
	20, 25	6 to 49
Example	Part no.: CQSKW25-47D-X633 CQSKWB25-50D with 3 mm width spacer inside. B dimension is 84 mm.	

Refer to pages 852 and 853 for cylinders with auto switches.


- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke




## Construction

### Basic type


ø12

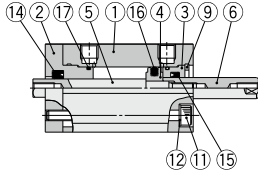

ø16, ø20, ø25

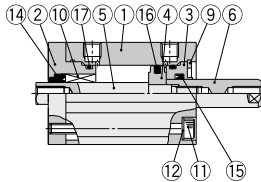


### Rod end male thread

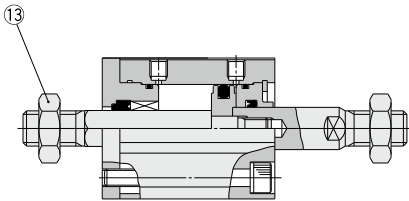


### With auto switch (Built-in magnet)


ø12

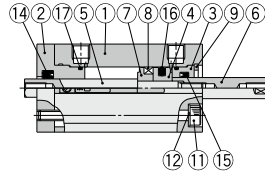

ø16

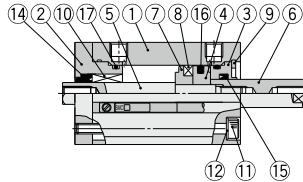

ø20, ø25

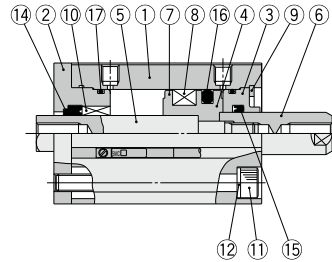

### Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Rod cover	Aluminum alloy	Anodized
3	Collar	Aluminum alloy	Anodized
4	Piston	Aluminum alloy	
5	Piston rod A	Stainless steel	
6	Piston rod B	Stainless steel	
7	Spacer for switch type	Aluminum alloy	Chromated
8	Magnet	—	
9	Retaining ring	Carbon tool steel	Phosphate coated
10	Non-rotating guide	Oil impregnated sintered alloy	ø16, ø20 and ø25
11	Hexagon socket head cap screw	Alloy steel	Nickel plated
12	Plain washer	Rolled steel	Nickel plated
13	Rod end nut	Carbon steel	Zinc chromated
14*	Rod seal for non-rotating	NBR	
15*	Rod seal	NBR	
16*	Piston seal	NBR	
17*	Tube gasket	NBR	

### Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSKWB12-PS	Set of nos. above 14, 15, 16, 17.
16	CQSKWB16-PS	
20	CQSKWB20-PS	
25	CQSKWB25-PS	

\* Seal kit includes 14, 15, 16, 17. Order the seal kit, based on each bore size.

\* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

# CQSKW Series


## Mounting Bolt for CQSKW

Mounting method: Mounting bolt for through-hole mounting type of CQSKW is available as an option.


Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x30L 2 pcs.**

### Round rod side mounting

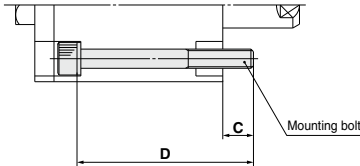

### Non-rotating rod side mounting

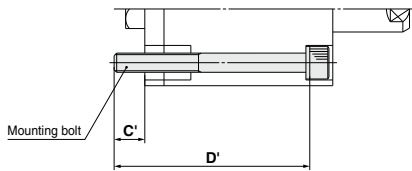

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
<b>CQSKWB12-5D</b>		25	CQ-M3 x 30L		30	CQ-M3 x 35L
-10D	6.5	30	x 35L	6.5	35	x 40L
-15D		35	x 40L		40	x 45L
-20D		40	x 45L		45	x 50L
-25D		45	x 50L		50	x 55L
-30D		50	x 55L		55	x 60L
<b>CQSKWB16-5D</b>			25		CQ-M3 x 30L	
-10D	6.5	30	x 35L	6.5	35	x 40L
-15D		35	x 40L		40	x 45L
-20D		40	x 45L		45	x 50L
-25D		45	x 50L		50	x 55L
-30D		50	x 55L		55	x 60L
<b>CQSKWB20-5D</b>			25		CQ-M5 x 35L	
-10D	10	30	x 40L	10	35	x 45L
-15D		35	x 45L		40	x 50L
-20D		40	x 50L		45	x 55L
-25D		45	x 55L		50	x 60L
-30D		50	x 60L		55	x 65L
-35D		55	x 65L		60	x 70L
-40D	60	x 70L	65	x 75L		
-45D	65	x 75L	70	x 80L		
-50D	70	x 80L	75	x 85L		
<b>CQSKWB25-5D</b>		30	CQ-M5 x 45L		35	CQ-M5 x 40L
-10D	7	35	x 40L	7	40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
-35D		60	x 65L		65	x 70L
-40D	65	x 70L	70	x 75L		
-45D	70	x 75L	75	x 80L		
-50D	75	x 80L	80	x 85L		

Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated


## Mounting Bolt for CDQSKW

Mounting method: Mounting bolt for through-hole mounting type of CDQSKW is available as an option.


Refer to the following for ordering procedures.  
Order the actual number of bolts that will be used.

**Example) CQ-M3x35L 2 pcs.**

### Round rod side mounting

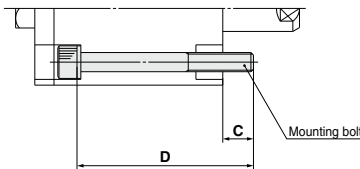

### Non-rotating rod side mounting

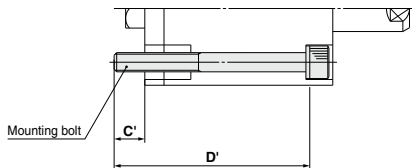

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
<b>CDQSKWB12-5D</b>		30	CQ-M3 x 35L		35	CQ-M3 x 40L
-10D	6.5	35	x 40L	6.5	40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
<b>CDQSKWB16-5D</b>			30		CQ-M3 x 35L	
-10D	6.5	35	x 40L	6.5	40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
<b>CDQSKWB20-5D</b>			35		CQ-M5 x 45L	
-10D	10	40	x 50L	10	45	x 55L
-15D		45	x 55L		50	x 60L
-20D		50	x 60L		55	x 65L
-25D		55	x 65L		60	x 70L
-30D		60	x 70L		65	x 75L
-35D		65	x 75L		70	x 80L
-40D	70	x 80L	75	x 85L		
-45D	75	x 85L	80	x 90L		
-50D	80	x 90L	85	x 95L		
<b>CDQSKWB25-5D</b>		40	CQ-M5 x 45L		45	CQ-M5 x 50L
-10D	7	45	x 50L	7	50	x 55L
-15D		50	x 55L		55	x 60L
-20D		55	x 60L		60	x 65L
-25D		60	x 65L		65	x 70L
-30D		65	x 70L		70	x 75L
-35D		70	x 75L		75	x 80L
-40D	75	x 80L	80	x 85L		
-45D	80	x 85L	85	x 90L		
-50D	85	x 90L	90	x 95L		


Material: Chromium molybdenum steel  
Surface treatment: Zinc chromated

**Dimensions:  $\phi 12$  to  $\phi 25$**



**Basic type (Through-hole/Both ends tapped common): CQSKW/CDQSKW**

\* For the auto switch mounting position and its mounting height, refer to page 852.


$\phi 12$




$\phi 16$

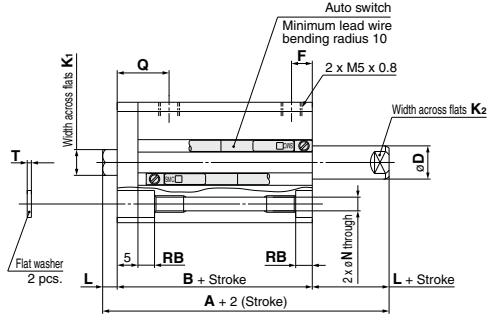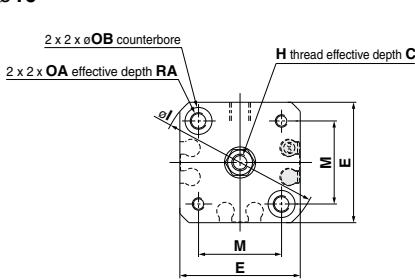

$\phi 20, \phi 25$



**Rod end male thread**

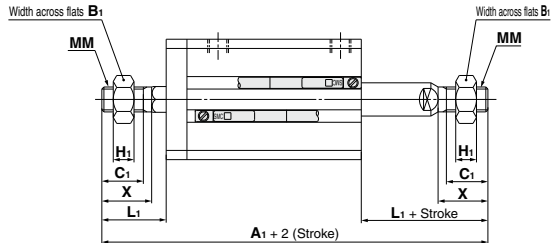

**Rod End Male Thread**

Bore size (mm)	Without auto switch		With auto switch		B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>	MM	X
	A <sub>1</sub>	A <sub>1</sub>	A <sub>1</sub>	A <sub>1</sub>						
12	55	60	8	9	4	14	M5 x 0.8	10.5		
16	58	63	10	10	5	15.5	M6 x 1.0	12		
20	68	78	13	12	5	18.5	M8 x 1.25	14		
25	79	89	17	15	6	22.5	M10 x 1.25	17.5		

**Basic Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	F	H	I	K <sub>1</sub>	K <sub>2</sub>	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B																	
12	5 to 30	34	27	39	32	6	6	25	7.5	M3 x 0.5	32	5.2	5	3.5	15.5	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
16	5 to 30	34	27	39	32	8	8	29	7.5	M4 x 0.7	38	6.2	6	3.5	20	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
20	5 to 50	40	31	50	41	7	10	36	8	M5 x 0.8	47	8.2	8	4.5	25.5	5.4	M6 x 1.0	9	13	10	7	1
25	5 to 50	44	34	54	44	12	12	40	9	M6 x 1.0	52	10.2	10	5	28	5.4	M6 x 1.0	9	14	10	7	1

Note 1) For basic type  $\phi 20$  and  $\phi 25$  with 5 stroke, through-hole is threaded over the entire length.


Note 2) The positions of width across flats (K<sub>2</sub>) on both sides are not the same.

\* For details about the rod end nut and accessory brackets, refer to page 809.


# CQSKW Series

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

Foot type: CQSKWL/CDQSKWL

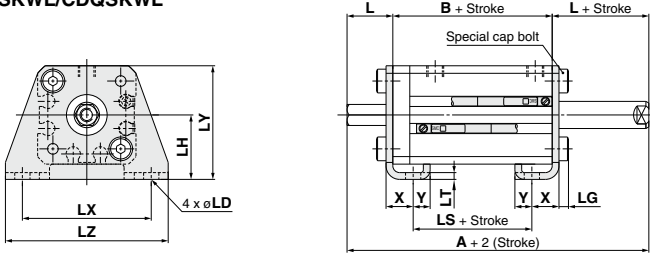

Rod end male thread

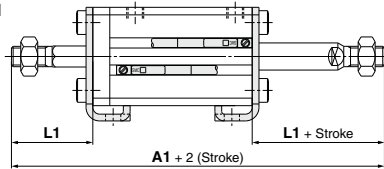


## Foot Type


Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS											
12	5 to 30	54	75	27	15	59	80	32	20	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	54	78	27	15	59	83	32	20	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	60	88	31	19	70	98	41	29	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	64	99	34	19	74	109	44	29	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

Compact foot type CQSKWLC/CDQSKWLC

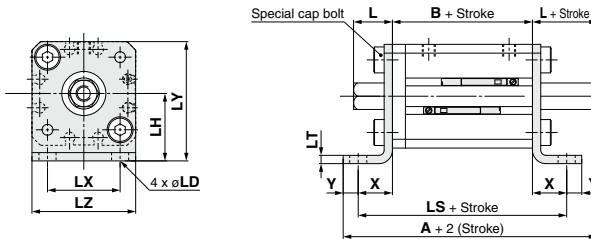

Rod end male thread

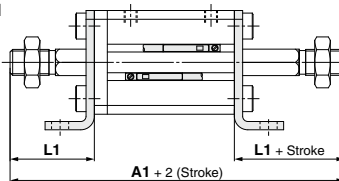

## Compact Foot Type


Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS										
12	5 to 30	54.3	75	27	45.6	59.3	80	32	50.6	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	5 to 30	54.8	78	27	45.6	59.8	83	32	50.6	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	5 to 50	64.5	88	31	57.4	74.5	98	41	67.4	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	5 to 50	68	99	34	60.4	78	109	44	70.4	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

\* For details about the rod end nut and accessory brackets, refer to page 809.

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

Flange type: CQSKWF/CDQSKWF

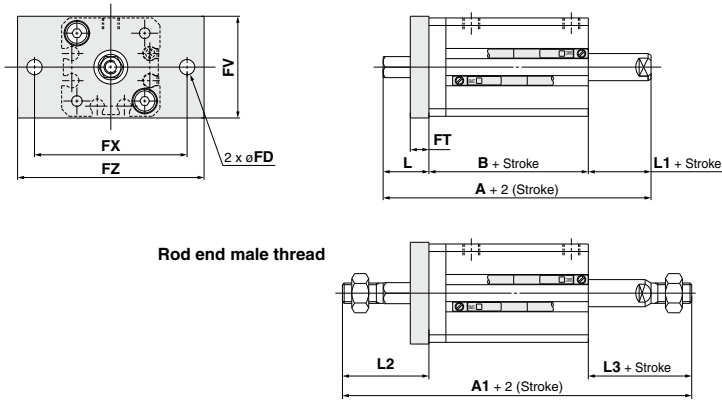

### Flange Type

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			FD	FT	FV	FX	FZ	L	L1	L2	L3
		A	A1	B	A	A1	B									
12	5 to 30	44	65	27	49	70	32	4.5	5.5	25	45	55	13.5	3.5	24	14
16	5 to 30	44	68	27	49	73	32	4.5	5.5	30	45	55	13.5	3.5	25.5	15.5
20	5 to 50	50	78	31	60	88	41	6.6	8	39	48	60	14.5	4.5	28.5	18.5
25	5 to 50	54	89	34	64	99	44	6.6	8	42	52	64	15	5	32.5	22.5

\* For details about the rod end nut and accessory brackets, refer to page 809.

Note 1) The positions of piston rod width across flats (right side) are not constant.


Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

# Compact Cylinder: Anti-lateral Load Type

# CQS□S Series

∅12, ∅16, ∅20, ∅25

## How to Order

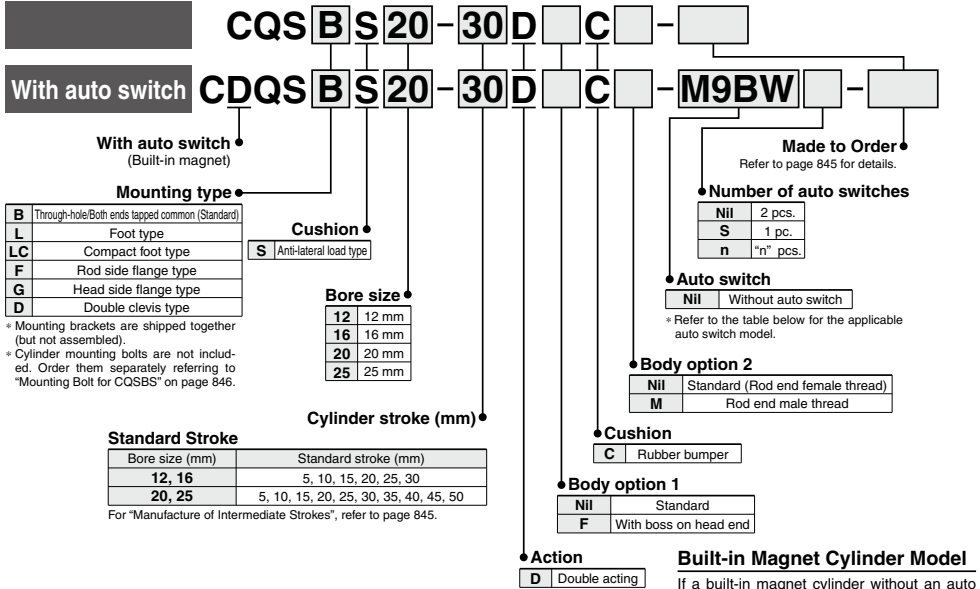

### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDQSL12-25D

### Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Perpendicular	In-line	0.5 (M)	1 (L)	3 (Z)	5 (Z)						
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC		
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○				
				2-wire				M9BV	M9B	●	●	●	○	○			—	
				3-wire (NPN)				M9NWV	M9NV	●	●	●	○	○			IC circuit	
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (PNP)	24 V	5 V, 12 V	—	—	M9PWV	M9PW	●	●	●	○	○	IC circuit	Relay, PLC	
				2-wire					M9BWW	M9WB	●	●	●	○	○			—
				3-wire (NPN)					M9NAV <sup>*1</sup>	M9NA <sup>*1</sup>	○	○	○	○	○			IC circuit
				3-wire (PNP)					M9PAV <sup>*1</sup>	M9PA <sup>*1</sup>	○	○	○	○	○			
Water resistant (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	—	—	M9BAV <sup>*1</sup>	M9BA <sup>*1</sup>	○	○	○	○	○	—	—		
			3-wire (NPN equivalent)					A96V	A96	●	●	●	—	—			IC circuit	—
Reed auto switch	—	Grommet	No	2-wire	24 V	12 V	100 V or less	A93V <sup>*2</sup>	A93	●	●	●	—	—	IC circuit	Relay, PLC		
				—				5 V	—	A96V	A96	●	●	●			—	—
				—				—	—	A90V	A90	●	●	●			—	—

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

\*2 Consult with SMC regarding water resistant types with the above model numbers.

\*3 21 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... NII (Example) M9NW  
1 m..... M (Example) M9NWM  
3 m..... L (Example) M9NWL  
5 m..... Z (Example) M9NWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 853 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

\* Auto switches are shipped together (not assembled).

Note) There is the case D-A93□V/M9□V/M9□WV/M9□WV type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.





### Symbol

Rubber bumper



**Made to Order:**  
**Individual Specifications**  
(For details, refer to pages 854 and 856.)

Symbol	Specifications
-X271	Fluororubber seals

### Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of Rod End Shape
-XB10	Intermediate stroke (Using exclusive body)
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-XC85	Grease for food processing equipment

### Body Option

Description	Application
Rod end male thread	Available for Double acting, Single rod models.

### Mounting Bracket Part No.

Bore size (mm)	Foot (1)	Compact foot (1)	Flange	Double clevis
12	CQS-L012	CQS-LC012	CQS-F012	CQS-D012
16	CQS-L016	CQS-LC016	CQS-F016	CQS-D016
20	CQS-L020	CQS-LC020	CQS-F020	CQS-D020
25	CQS-L025	CQS-LC025	CQS-F025	CQS-D025

Note1) When ordering foot and compact foot brackets, order 2 pieces per cylinder.

Note2) Parts belonging to each bracket are as follows.

Foot, Compact foot, Flange type: Body mounting bolt  
Double clevis type: Clevis pin, type C retaining ring for axis, Body mounting bolt

### Moisture Control Tube IDK Series



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.


Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to the [Web Catalog](#).

### Standard Specifications

Bore size (mm)	12	16	20	25
<b>Action</b>	Double acting, Single rod			
<b>Fluid</b>	Air			
<b>Lubrication</b>	Not required (Non-lube)			
<b>Proof pressure</b>	1.5 MPa			
<b>Maximum operating pressure</b>	1.0 MPa			
<b>Minimum operating pressure</b>	0.07 MPa		0.05 MPa	
<b>Ambient and fluid temperature</b>	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
<b>Cushion</b>	Rubber bumper*			
<b>Rod end thread</b>	Female thread			
<b>Stroke length tolerance</b>	$\begin{matrix} +1.0 \text{ mm}^* \\ 0 \end{matrix}$			
<b>Piston speed</b>	50 to 500 mm/s			
<b>Allowable kinetic energy (J)</b>	0.043	0.075	0.11	0.18

\* Stroke length tolerance does not include the deflection of the bumper.

### Theoretical Output



Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT	113	34	57	79
16	8	IN	151	45	75	106
		OUT	201	60	101	141
20	10	IN	236	71	118	165
		OUT	314	94	157	220
25	12	IN	378	113	189	264
		OUT	491	147	245	344

### Manufacture of Intermediate Stroke

Description		Spacer is installed in the standard stroke body.	
Standard stroke	Part no.	Refer to "How to Order" for the standard model no. (page 844).	
	Description	Intermediate strokes in 1 mm increments are available by using spacers with standard stroke cylinders.	
	Stroke range	Bore size	Stroke range
		12, 16	1 to 29
		20, 25	1 to 49
Example	Part no.: CQSBS25-47D CQSBS25-50D with 3 mm width spacer inside. B dimension is 77.5 mm.		


Refer to pages 852 and 853 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Minimum auto switch mounting stroke




## Construction

### Basic type

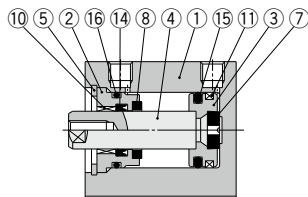


### Rod end male thread




### With auto switch (Built-in magnet)

ø12, ø16

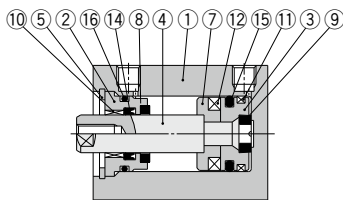


ø20, ø25

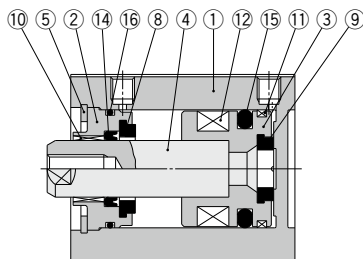

### Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Rod end nut	Carbon steel	Zinc chromated
7	Spacer for switch type	Aluminum alloy	Chromated
8	Bumper A	Urethane	
9	Bumper B	Urethane	
10	Bushing	Oil-impregnated sintered alloy	
11	Wear ring	Resin	
12	Magnet	—	
13	Centering location ring	Aluminum alloy	Anodized
14*	Rod seal	NBR	
15*	Piston seal	NBR	
16*	Tube gasket	NBR	

### With boss on head end

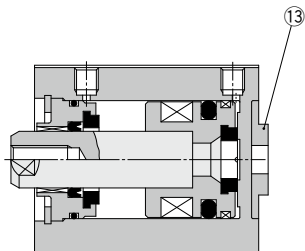

### Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSB12-PS	
16	CQSB16-PS	Set of nos. above 14, 15, 16.
20	CQSB20-PS	
25	CQSB25-PS	


- \* Seal kit includes 14, 15, 16. Order the seal kit, based on each bore size.
- \* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)


## Dimensions: $\phi 12$ to $\phi 25$

### Basic type (Through-hole/Both ends tapped common): CQSBS/CDQSBS


$\phi 12$




$\phi 16$

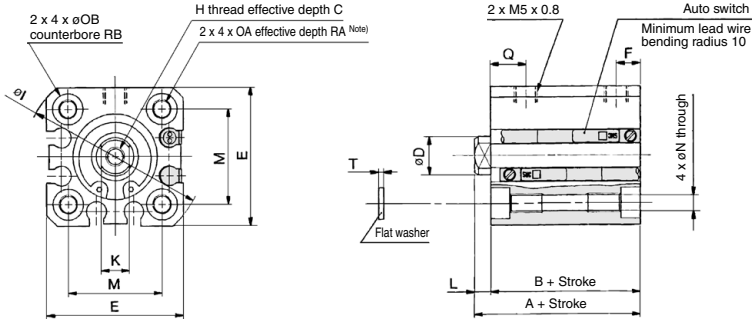


$\phi 20, \phi 25$



### Rod end male thread

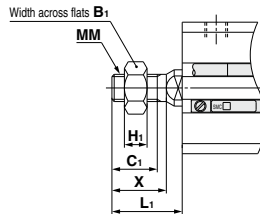

### With boss on head end

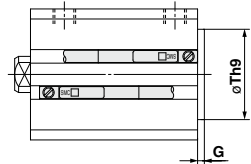

### Rod End Male Thread

Bore size (mm)	B <sub>1</sub>	C <sub>1</sub>	H <sub>1</sub>	L <sub>1</sub>	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

### With Boss on Head End (mm)

Bore size (mm)	G	Th9
12	1.5	15 <sup>0</sup> <sub>0.043</sub>
16	1.5	20 <sup>0</sup> <sub>0.052</sub>
20	2	13 <sup>0</sup> <sub>0.043</sub>
25	2	15 <sup>0</sup> <sub>0.043</sub>

Note) With boss on rod end: Option (Suffix "-XC36" to the end of part number.)

Note that only bore sizes  $\phi 12$  and  $\phi 16$  are applicable to the long stroke.

### Basic Type


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	F	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B																
12	5 to 30	25.5	22	30.5	27	6	6	25	5	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16	5 to 30	25.5	22	30.5	27	8	8	29	5	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20	5 to 50	29	24.5	39	34.5	7	10	36	5.5	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	8	10	7	1
25	5 to 50	32.5	27.5	42.5	37.5	12	12	40	5.5	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	9	10	7	1

Note) For basic type 5 to 10 stroke with  $\phi 20$  and 5 stroke with  $\phi 25$ , through-hole is threaded over the entire length.


\* For details about the rod end nut and accessory brackets, refer to page 809.

**Dimensions:  $\varnothing 12$  to  $\varnothing 25$**


**Foot type: CQSLs/CDQSLs**

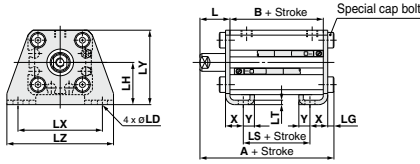


Rod end male thread




**Compact foot type: CQSLCS/CDQSLCS**

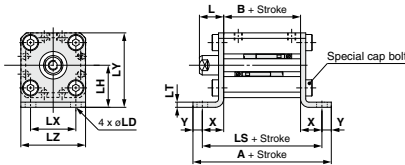


Rod end male thread




**Rod side flange type: CQSFS/CDQSFS**

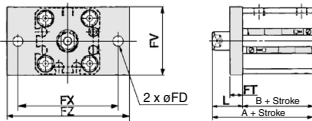


Rod end male thread



**Head side flange type: CQSGS/CDQSGS**

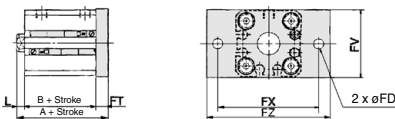

Rod end male thread



**Foot Type**

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5 to 30	40.3	22	10	45.3	27	15
16	5 to 30	40.3	22	10	45.3	27	15
20	5 to 50	46.2	24.5	12.5	56.2	34.5	22.5
25	5 to 50	49.7	27.5	12.5	59.7	37.5	22.5

Bore size (mm)	L	L <sub>1</sub>	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel  
Surface treatment: Nickel plated

**Compact Foot Type**

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5 to 30	49.6	22	40.6	54.6	27	45.6
16	5 to 30	50.6	22	40.6	55.6	27	45.6
20	5 to 50	62.5	24.5	50.9	72.5	34.5	60.9
25	5 to 50	65.5	27.5	53.9	75.5	37.5	63.9

Bore size (mm)	L	L <sub>1</sub>	LD	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	17	2	15.5	29.5	25	9.3	4.5
16	13.5	25.5	4.5	19	2	20	33.5	29	9.3	5
20	14.5	28.5	6.6	24	3.2	25.5	42	36	13.2	5.8
25	15	32.5	6.6	26	3.2	28	46	40	13.2	5.8

Compact foot bracket material: Carbon steel  
Surface treatment: Zinc chromated

**Rod Side Flange Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch	
		A	B	A	B
12	5 to 30	35.5	22	40.5	27
16	5 to 30	35.5	22	40.5	27
20	5 to 50	39	24.5	49	34.5
25	5 to 50	42.5	27.5	52	37.5

Bore size (mm)	FD	FT	FV	FX	FZ	L	L <sub>1</sub>
12	4.5	5.5	25	45	55	13.5	24
16	4.5	5.5	30	45	55	13.5	25.5
20	6.6	8	39	48	60	14.5	28.5
25	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated

**Head Side Flange Type**

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch	
		A	B	A	B
12	5 to 30	31	22	36	27
16	5 to 30	31	22	36	27
20	5 to 50	37	24.5	47	34.5
25	5 to 50	40.5	27.5	50.5	37.5


Bore size (mm)	FD	FT	FV	FX	FZ	L	L <sub>1</sub>
12	4.5	5.5	25	45	55	3.5	14
16	4.5	5.5	30	45	55	3.5	15.5
20	6.6	8	39	48	60	4.5	18.5
25	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel  
Surface treatment: Nickel plated


\* For details about the rod end nut and accessory brackets, refer to page 809.

Dimensions:  $\varnothing 12$  to  $\varnothing 25$

## Double clevis type: CQS $\square$ S/CDQS $\square$ S

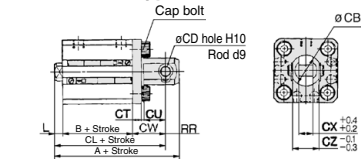

### Rod end male thread



## Double Clevis Type

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	CL	A	B	CL
12	5 to 30	45.5	22	39.5	50.5	27	44.5
16	5 to 30	46.5	22	40.5	51.5	27	45.5
20	5 to 50	56	24.5	47	66	34.5	57
25	5 to 50	62.5	27.5	52.5	72.5	37.5	62.5

Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	L	L <sub>1</sub>	RR
12	12	5	4	7	14	5	10	3.5	14	6
16	14	5	4	10	15	6.5	12	3.5	15.5	6
20	20	8	5	12	18	8	16	4.5	18.5	9
25	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel  
Surface treatment: Nickel plated

\* For details about the double clevis pivot bracket, refer to page 808.


\* For details about the rod end nut and accessory brackets, refer to page 809.



# Auto Switch Mounting

## Proper Auto Switch Mounting Position (Detection at stroke end) and Its Mounting Height

Basic type, Single acting (Spring return/Spring extend), Long stroke type, Anti-lateral load type

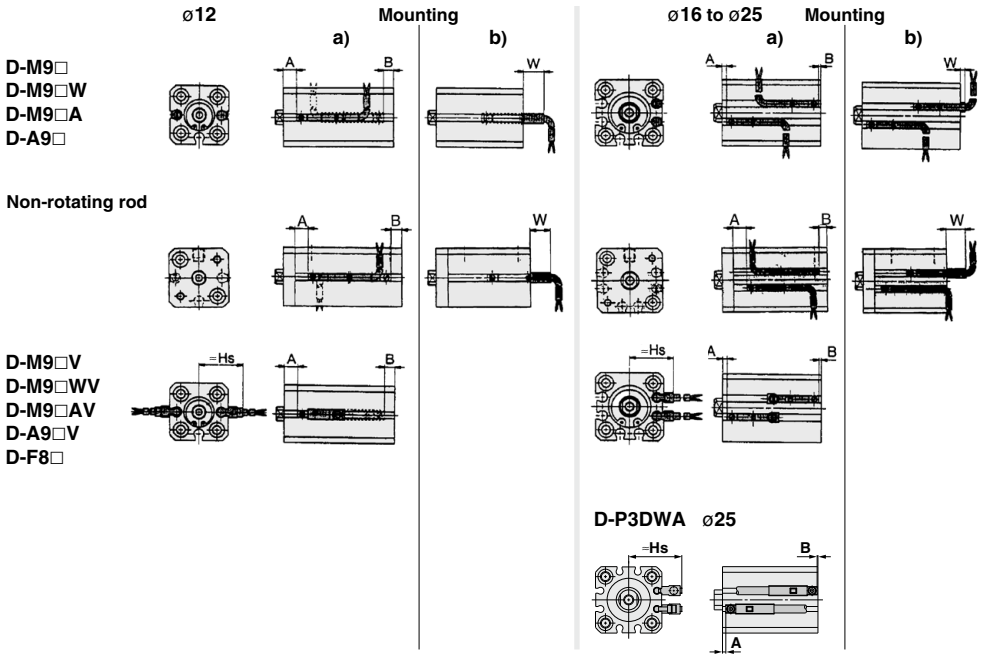

## Proper Auto Switch Mounting Position (Detection at stroke end)

### Proper Auto Switch Mounting Position

Auto switch model	D-M9□/M9□W			D-M9□V/M9□WV/M9□AV			D-M9□A			D-A9□			D-A9□V			D-F8□			D-P3DWA		
	A	B	W	A	B	Hs	A	B	W	A	B	W	A	B	Hs	A	B	Hs	A	B	Hs

Single rod: Basic type, Single acting (Spring return/Spring extend), Non-rotating rod [ ]: Denotes the values of D-A93. ( ): Denotes the values of type T.

12	5.5 (6.5)	3.5 (4.5)	5.5 (6.5)	5.5 (6.5)	4.5 (3.5)	19.5	5.5 (6.5)	4.5 (3.5)	7.5 (8.5)	1.5 (2.5)	0	1.5 (4) (2.5 [5])	1.5 (2.5)	0	17	3.5	2.5	27	—	—	—
16	6	4	6	6	4	21.5	6	4	8	2	0	2 (4.5)	2	0	19	4	2	29	—	—	—
20	10	7.5	2.5	10	7.5	25	10	7.5	4.5	6	3.5	-1.5 [1]	6	3.5	22.5	8.5	5	32.5	—	—	—
25	11	9.5	0.5	11	9.5	27	11	9.5	2.5	7	5.5	-3.5 [-1]	7	5.5	24.5	9	7.5	34.5	6.5	5	33

### Long stroke

12	9	11	-1	9	11	19.5	9	11	1	5	7	-5 [2.5]	5	7	17	7	9	27	—	—	—
16	9.5	10.5	-0.5	9.5	10.5	21.5	9.5	10.5	1.5	5.5	6	-4.5 [-2]	5.5	6	19	7.5	8.5	29	—	—	—
20	13	16	-6	13	16	25	13	16	-4	9	12	-10 [-7.5]	9	12	22.5	11	14	32.5	—	—	—
25	14	18	-8	14	18	27	14	18	-6	10	14	-12 [-9.5]	10	14	24.5	12	16	34.5	9.5	13.5	33

### Anti-lateral load type

12	10	5	5	10	5	19.5	10	5	7	6	1	1 [3.5]	6	1	17	8	3	27	—	—	—
16	9.5	5.5	4.5	9.5	5.5	21.5	9.5	5.5	6.5	5.5	1.5	0.5 [3]	5.5	1.5	19	7.5	3.5	29	—	—	—
20	13	9.5	0.5	13	9.5	25	13	9.5	2.5	9	5.5	-3.5 [-1]	9	5.5	22.5	11	7.5	32.5	—	—	—
25	14	11.5	-1.5	14	11.5	27	14	11.5	0.5	10	7.5	-5.5 [-3]	10	7.5	24.5	12	9.5	34.5	9.5	7	33

### Double acting: Basic type, Non-rotating rod

12	5.5	9.5	0.5	5.5	9.5	19.5	5.5	9.5	2.5	1.5	5.5	-3.5 [1]	1.5	5.5	17	3.5	7.5	27	—	—	—
16	6	9	1	6	9	21.5	6	9	3	2	5	-3 [-0.5]	2	5	19	4	7	29	—	—	—
20	10	14	-4	10	14	25	10	14	-2	6	10	-8 [-5.5]	6	10	22.5	8	12	32.5	—	—	—
25	11	16	-6	11	16	27	11	16	-4	7	12	-10 [-7.5]	7	12	24.5	9	14	34.5	6.5	11.5	33

Note 1) Negative figures in the table W indicate an auto switch is mounted inward from the edge of the cylinder body.

Note 2) The D-M9□/M9□W and M9□A cannot be installed on the single acting: single rod type.

Note 3) Adjust the auto switch after confirming the operating conditions in the actual setting.

Note 4) The D-P3DWA□ is available only for ø25.



## Operating Range


Auto switch model	Bore size (mm)			
	12	16	20	25
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV	3	4	5.5	5.5
D-A9□/A9□V	6	7.5	10	10
D-F8□	2.5	3	4	4
D-P3DWA	—	—	—	6

\* Since this is a guideline including hysteresis, not meant to be guaranteed. (assuming approximately ±30% dispersion.) There may be the case it will vary substantially depending on an ambient environment.

## Minimum Auto Switch Mounting Stroke

No. of auto switch mounted	(mm)							
	D-M9□V	D-M9□WV D-M9□AV	D-A9□	D-A9□V	D-M9□	D-M9□W D-M9□A	D-F8□	D-P3DWA <small>Note 2)</small>
1 pc.	5	10	10 (5)	5	15 (5)	15 (10)	5	15
2 pcs.	5	10	10	10	15 (5)	15 (10)	5	15


Note 1) The D-M9□/M9□W/M9□A and P3DWA□ cannot be installed on the single acting: single rod type.  
 Note 2) Available only for ø25.  
 Note 3) As the dimension stated in ( ) shows the minimum mountable stroke when the auto switch does not project from the end face of the cylinder body and the lead wire bending space is not hindered, the auto switch needs to be ordered separately. (Refer to the figure below.)



## ⚠ Caution

### Avoid proximity to magnetic objects.

• If the cylinder is used in an application in which a magnetic material is placed in close contact around the cylinder as shown in the graph on the right (including cases in which even one of the sides is in close contact) the operation of auto switches could become unstable. Therefore, please check with SMC for this type of application.

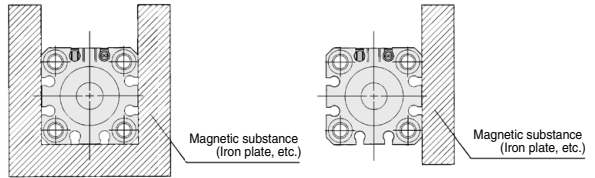

Other than the applicable auto switches listed in "How to Order", the following auto switches can be mounted.

- \* Normally closed (NC = b contact) solid state auto switches (D-M9□E(V)) and solid state auto switch D-F8 are also available. For details, refer to pages 1289 and 1290.
- \* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1340 and 1341 for details.

## ⚠ Precautions

Be sure to read this before handling the products.

Refer to page 20 for safety instructions and pages 21 to 30 for actuator and auto switch precautions.



## 1 Special Piston Rod End for Double Rod Type Cylinder

Symbol  
**-X235**


Male thread is used at one piston rod end of double rod type cylinder and female thread is used at the other end.

C□QSW **Mounting** **Bore size** — **Stroke** **D** — **X235**

\* Specifications: Same as standard type.  
Note) Please contact SMC for mounting bracket.

“D” in the case of “-235”

Piston rod end  
Male thread, Female thread

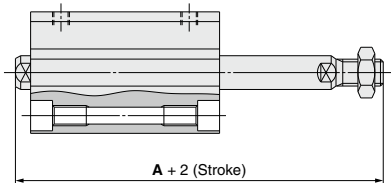

Symbol	Bore size	12	16	20	25
<b>A</b>		39.5 (44.5)	41 (46)	49 (59)	56.5 (66.5)
Applicable stroke		5 to 30		5 to 50	

Note 1) Applicable stroke is available in 5 mm increments.  
Note 2) ( ): Denotes the dimensions with auto switch.

## 2 Fluororubber for Seals

Symbol  
**-X271**

Material for seals is changed to fluororubber.

C□QS **Standard model no.** — **X271**

All series variations except non-rotating piston rod type of the CQS series is available. Specifications are the same as for each variation of CQS.

Fluororubber for seals

## 3 Long Stroke of Adjustable Extension Stroke Cylinder (-XC8)


Symbol  
**-X525**

C□QS **Mounting** **Bore size** — **Stroke** **D(M)** — **X525**

Long stroke  
of XC8

Specifications are the same as for -XC8 of the CQ2/CQS series. Refer to “Made to Order Common Specifications”. Note) For the tap mounting type (ø12 to ø25—without switch) and mounting bracket, please contact SMC.


ø12, ø16

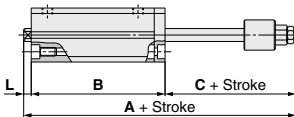

ø12, ø16

Symbol Stroke	A				B			C	L	Applicable stroke	
	35st	40st	45st	50st	35st	40st	45st				50st
Bore (mm)											
<b>12</b>	91.1 (96.1)	96.1 (101.1)	101.1 (106.1)	106.1 (111.1)	62 (67)	67 (72)	72 (77)	77 (82)	25.6	3.5	35, 40, 45, 50
<b>16</b>	91.5 (96.5)	96.5 (101.5)	101.5 (106.5)	106.5 (111.5)	62 (67)	67 (72)	72 (77)	77 (82)	26	3.5	

ø20, ø25

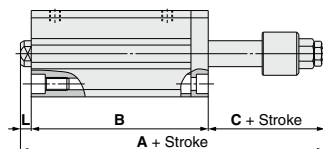

ø20, ø25

Symbol Stroke	A		B		C	L	Applicable stroke
	55 to 75st	80 to 100st	55 to 75st	80 to 100st			
Bore (mm)							
<b>20</b>	142.5 (152.5)	167.5 (177.5)	109 (119)	134 (144)	29	4.5	55 to 100
<b>25</b>	146 (156)	171 (181)	112 (122)	137 (147)	29	5	

Note 1) ( ): Denotes dimensions with auto switch.  
Note 2) Applicable stroke is available in 5 mm increments.

**4 Long Stroke of Adjustable Retraction Stroke Cylinder (-XC9)**

Symbol  
**-X526**


C□QS **Mounting** **Bore size** — **Stroke** D (M) — X526

Long stroke of XC9

Specifications are the same as for -XC9 of the CQS series.  
Refer to "Made to Order Common Specifications".  
Note) Please contact SMC for bracket type.

**Dimensions**


ø12, ø16

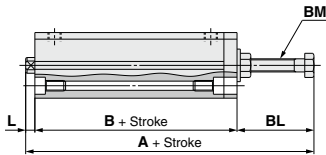

Symbol Bore (mm)	A	B	L	BL	BM	Applicable stroke
<b>12</b>	69.8	37	3.5	29.3	M5 x 0.8	35, 40, 45, 50, 75, 100
<b>16</b>	69.5	37	3.5	29	M6 x 1.0	75, 100, 125, 150, 175, 200
<b>20</b>	76	41	4.5	30.5	M8 x 1.25	75, 100, 125, 150, 175, 200, 250, 300
<b>25</b>	78.5	44	5	29.5	M8 x 1.25	75, 100, 125, 150, 175, 200, 250, 300

Note 1) Intermediate stroke type (available in 5 mm increments) is for spacer so that dimensions are the same as for each type of 75, 100, 125, 150, 175, 200, 250, 300 stroke.

ø20, ø25

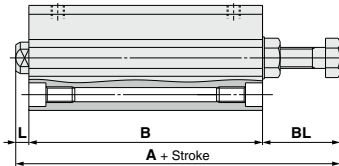


**5 Intermediate Stroke of Double Rod Type**

Symbol  
**-X633**

C□QSW **Standard model no.** — X633  
C□QSKW

※ Specifications: Same as standard type.  
Note) Please contact SMC for bracket type.

**Dimensions**

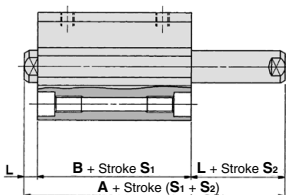

Symbol Bore (mm)	C(D)QSW		C(D)QSKW		L	Stroke S <sub>1</sub>	Stroke S <sub>2</sub>
	A	B	A	B			
<b>12</b>	29 (34)	22 (27)	34 (39)	27 (32)	3.5	In the case of 5 to 30 stroke 5 mm intervals	In the case of 6 to 29 stroke 1 mm intervals
<b>16</b>	29 (34)	22 (27)	34 (39)	27 (32)	3.5	In the case of 5 to 30 stroke 5 mm intervals	In the case of 6 to 29 stroke 1 mm intervals
<b>20</b>	35 (45)	26 (36)	40 (50)	31 (41)	4.5	In the case of 5 to 50 stroke 5 mm intervals	In the case of 6 to 49 stroke 1 mm intervals
<b>25</b>	39 (49)	29 (39)	44 (54)	34 (44)	5	In the case of 5 to 50 stroke 5 mm intervals	In the case of 6 to 49 stroke 1 mm intervals

Note 1) ( ): Denotes the dimensions with auto switch.

Note 2) Installing a spacer inside the standard cylinder tube, stroke S<sub>1</sub> has 5 mm intervals for controlling intermediate strokes in 1 mm increments.

Example) In the case of CDQ2WB40-16D, stroke S<sub>1</sub> is 20 mm and stroke S<sub>2</sub> is 18 mm.



### 6 Long Stroke of Dual Stroke Single Rod Type

Symbol

**-X636**

C□QSB Bore size — Stroke S<sub>1</sub> + Stroke S<sub>2</sub>-S<sub>1</sub> DC (M) — X636

Long stroke of  
XC11

#### Applicable stroke


mm

Bore size	Stroke
ø12, ø16	Max. stroke S <sub>2</sub> : up to 50 mm
ø20, ø25	Max. stroke S <sub>2</sub> : up to 100 mm

Specifications are the same as for -XC11 of the CQS series.

Refer to "Made to Order Common Specifications".

Note) Please contact SMC for tap mounting type and bracket mounting type.

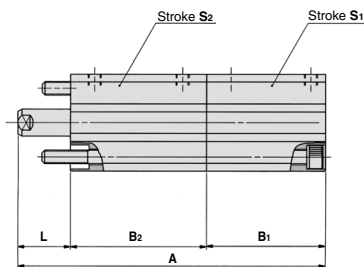

#### Bore size: ø12, ø16

mm

Symbol	A	B <sub>1</sub>	B <sub>2</sub>	L	Stroke range	
					S <sub>1</sub>	S <sub>2</sub>
Bore ø12	62.5 (67.5) + Stroke (S <sub>1</sub> + S <sub>2</sub> )	17 (22) + Stroke S <sub>1</sub>	32 + Stroke S <sub>2</sub>	13.5	5 to 30	35 to 50
Bore ø16	62.5 (67.5) + Stroke (S <sub>1</sub> + S <sub>2</sub> )	17 (22) + Stroke S <sub>1</sub>	32 + Stroke S <sub>2</sub>	13.5	5 to 30	35 to 50

#### Bore size: ø20, ø25

mm

Symbol	A		B <sub>1</sub>	B <sub>2</sub>		L	Stroke range	
	Stroke S <sub>2</sub>			Stroke S <sub>2</sub>			S <sub>1</sub>	S <sub>2</sub>
	55 to 75	80 to 100		55 to 75	80 to 100			
Bore ø20	150 (160) + Stroke S <sub>1</sub>	175 (185) + Stroke S <sub>1</sub>	19.5 (29.5) + Stroke S <sub>1</sub>	116	141	14.5	5 to 50	55 to 100
Bore ø25	156.5 (166.5) + Stroke S <sub>1</sub>	181.5 (191.5) + Stroke S <sub>1</sub>	22.5 (32.5) + Stroke S <sub>1</sub>	119	144	15	5 to 50	55 to 100

Note 1) ( ): Denotes the dimensions with auto switch.

Note 2) Applicable stroke is available in 5 mm increments.