

採用难燃性树脂 (附合美国UL规格V-O)  
标准带有涂膜密封件


### 规格

保证耐压力	1.5MPa {15.3 kgf/cm <sup>2</sup> }
最高使用压力	1MPa {10.2 kgf/cm <sup>2</sup> }
最低使用压力	0.1MPa {1 kgf/cm <sup>2</sup> }
环境及流体温度	0 ~ 60°C
调整流量转数	10回转 (8回转)
适用软管材料	尼龙、软尼龙、PU软管


型号		接管口径	适用软管 外径 (mm)	流量 (l/min)	有效断面积 (mm <sup>2</sup> )
限出型	限入型				
AS1201-M5-F04	AS1211-M5-F04	M5 x 0.8	4	100	1.5
AS1201-M5-F06	AS1211-M5-F06		6		
AS2201-01-F06S	AS2211-01-F06S	R(PT) ⅜	6	230	3.5
AS2201-01-F08S	AS2211-01-F08S		8		
AS2201-02-F06S	AS2211-02-F06S	R(PT) ¼	6	390	6
AS2201-02-F08S	AS2211-02-F08S		8		
AS3201-03-F08S	AS3211-03-F08S	R(PT) ⅝	8	790	12
AS3201-03-F10S	AS3211-03-F10S		10		
AS4201-04-F10S	AS4211-04-F10S	R(PT) ½	10	1580	24
AS4201-04-F12S	AS4211-04-F12S		12		

### 外形尺寸图 (毫米)

AS22□1 ~ AS42□1

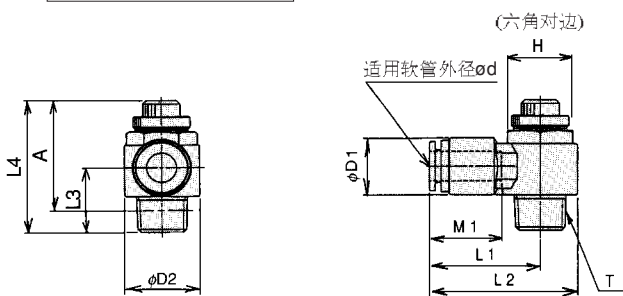

AS12□1

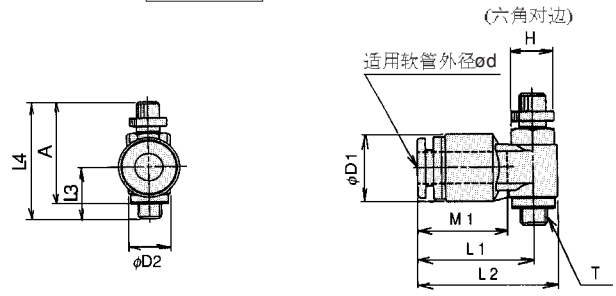

型号	φd	T	H	D1	D2	L1	L2	L3	L4		A		M1	重量 g
									最大	最小	最大	最小		
AS12□1-M5-F04	4	M5 x 0.8	8	13	9	21	25.5	11.2	28.3	25.5	25	22.2	16	12.7
AS12□1-M5-F06	6					21.5	26						17	12.5
AS22□1-01-F06S	6	R(PT) ⅜	12	15.5	14.6	26.6	33.9	14.7	36.4	31.4	32.4	27.4	17	33.7
AS22□1-01-F08S	8												18.5	30.7
AS22□1-02-F06S	6	R(PT) ¼	17	15.5	19.5	28.7	38.5	17.7	40.8	35.8	34.8	29.8	17	56.3
AS22□1-02-F08S	8												18.5	52.1
AS32□1-03-F08S	8	R(PT) ⅝	19	18.2	24.3	32.7	44.9	20.1	46.9	41.9	40.6	35.6	18.5	92.9
AS32□1-03-F10S	10					33.3	45.5						21	87.6
AS42□1-04-F10S	10	R(PT) ½	24	22.3	28.5	36.1	50.4	25.5	55.6	50.6	47.4	42.4	21	153.8
AS42□1-04-F12S	12												22	145.5