

AS-FPQ



AS-FPG


型号	接管口径	适合软管外径 (mm)	额定流量* (ℓ/min)(ANR)	有效截面积 (mm ²)
AS12□1FP□-M5	M5 x 0.8	4,6	100	1.5
AS22□1FP□-01	R 1/8	4,6,8	180 ~ 230	2.7 ~ 3.5
AS22□1FP□-02	R 1/4	4,6,8,10	260 ~ 460	4 ~ 7
AS32□1FP□-03	R 3/8	6,8,10,12	660 ~ 920	10 ~ 14
AS42□1FP□-04	R 1/2	10,12	1580 ~ 1710	24 ~ 26

*在压力为0.5MPa、温度为20℃时的值


共同规格

最高使用压力	1.0MPa
最低使用压力	0.1MPa
环境及使用流体温度	-5 ~ 60℃ (但未冻结)
调整流量圈数	10圈 (AS12□1FP□为8圈)
发尘量的等级	等级1
适合软管材质	洁净系列聚氨酯 (10-系列)


发尘量的等级分类

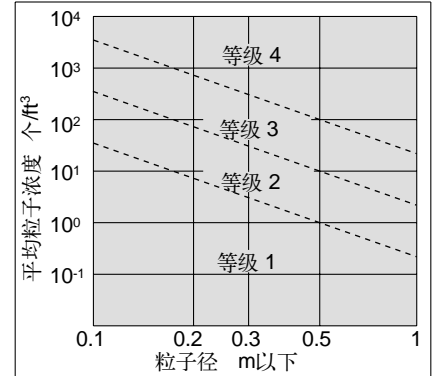

型号表示方法

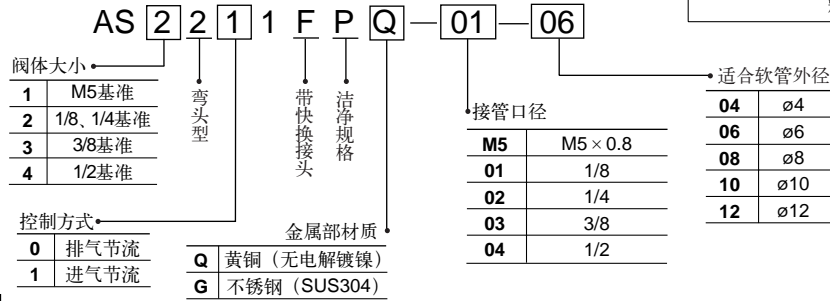

外形尺寸图 (毫米)

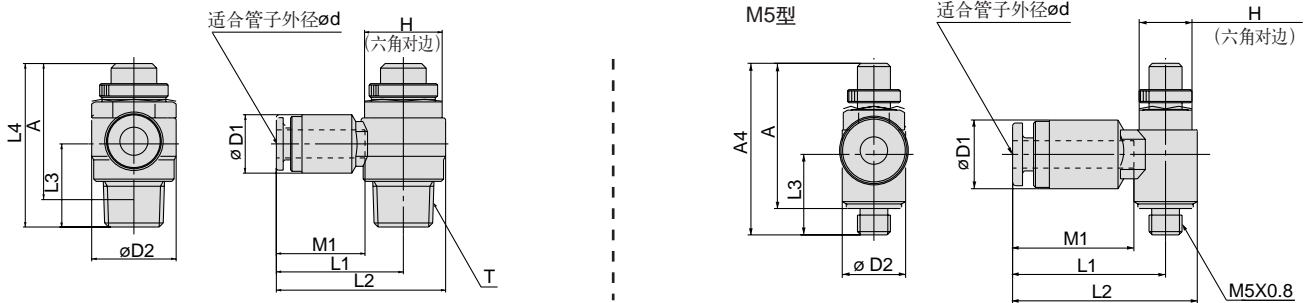

型号	管子外径 d	T	H	D1	D2	L1	L2	L3	L4		A		M1								
									MAX.	MIN.	MAX.	MIN.									
AS12□1FP□-M5-04	4	M5 x 0.8	8	10.4	9.6	23.2	28	12.2	28.3	25.5	25	22.2	18.4								
AS12□1FP□-M5-06	6			12.8										24.2	29						
AS22□1FP□-01-04	4	R 1/8	12	10.4	14.2	25.3	32.4	14.3	36.4	31.4	32.4	27.4	18.4								
AS22□1FP□-01-06	6			12.8										26.3	33.4	14.3	36.4	31.4	32.4	27.4	19.4
AS22□1FP□-01-08	8			15.2										28.5	35.6	21.9					
AS22□1FP□-02-04	4	R 1/4	17	10.4	18.5	27.8	37	18.2	40.8	35.8	34.8	29.8	18.4								
AS22□1FP□-02-06	6			12.8										27.8	37	19.4					
AS22□1FP□-02-08	8			15.2										30.4	39.6	21.9					
AS22□1FP□-02-10	10			18.5										38.3	47.5	23.8					
AS22□1FP□-02-12	12			20.9										42.1	51.3	25.8					
AS32□1FP□-03-06	6	R 3/8	19	12.8	23	30.4	41.9	20.9	46.9	41.9	40.6	35.6	19.4								
AS32□1FP□-03-08	8			15.2										32.9	44.4	21.9					
AS32□1FP□-03-10	10			18.5										34.6	46.1	23.8					
AS32□1FP□-03-12	12			20.9										35.8	47.3	25					
AS42□1FP□-04-10	10	R 1/2	24	18.5	28.6	36.6	50.9	25.4	55.6	50.6	47.4	42.4	23.8								
AS42□1FP□-04-12	12			20.9										38.2	52.5	25					