


直通型

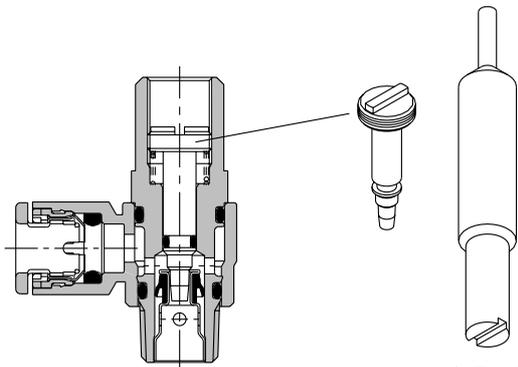

采用专用工具调节流量可防止
错误手动操作。

专用工具
型号: AS-T-1

共同规格

最高使用压力	1.0MPa
最低使用压力	0.1MPa
环境及流体温度	-5 ~ +60°C(但未冻结)
调整流量圈数	10圈(*8圈)
适合软管	尼龙, 软尼龙, 聚氨酯
专用工具型号	AS-T-1


*AS1001F时。

型号	规格		
	适合软管外径 ø(mm)	注1) 额定流量 ℓ/min (ANR)	有效截面积 (mm ²)
AS1001F-23T	3.2	100	1.5
AS1001F-04T	4	100	1.5
AS1001F-06T	6	100	1.5
AS2001F-04T	4	130	2
AS2001F-06T	6	230	3.5
AS2051F-06T	6	290	4.5
AS2051F-08T	8	460	7
AS3001F-06T	6	420	6.5
AS3001F-08T	8	660	10
AS3001F-10T	10	920	14
AS3001F-12T	12	920	14
AS4001F-10T	10	1050	16
AS4001F-12T	12	1390	21



注1) 供应压力0.5MPa, 流体温度20°C。

注2) 软管外径也有英寸, 请与SMC营业员联络。

型号表示方法

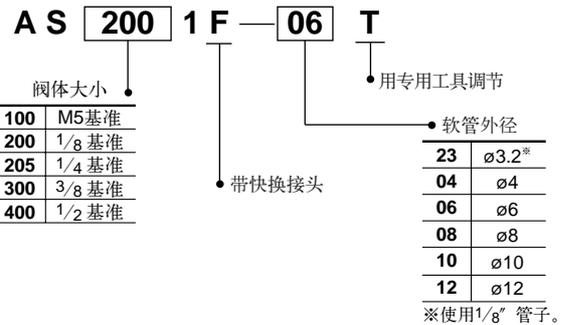

外形尺寸图 (毫米)

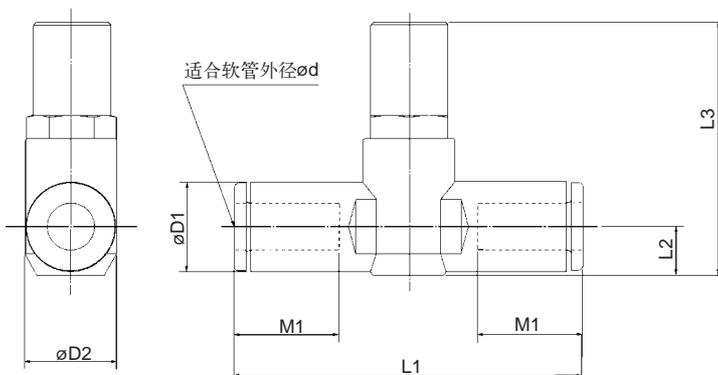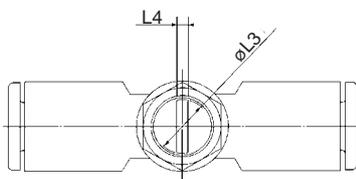

型号	d	D1	D2	D3	L1	L2	L3	L4	M1
AS1001F-23T	3.2	8.4	10	4.5	38	4.5	26	0.7	12.7
AS1001F-04T	4	9.3			39.2	5.2	26.6		
AS1001F-06T	6	11.6	11.8	7	40.7	6.2	27.7	1.5	13.5
AS2001F-04T	4	9.3			44.8	6.3	33		
AS2001F-06T	6	11.6	14.8	7	53.2	6.7	35.2	1.5	17
AS2051F-06T	6	12.8			59.8	8.1	36.5		
AS2051F-08T	8	15.2	19.8	9.5	59	7.4	45	1.5	18
AS3001F-06T	6	12.8			64.4	8.2	45.8		
AS3001F-08T	8	15.2	19.8	9.5	71.6	9.8	47.3	1.5	21
AS3001F-10T	10	18.5			76	11	48.5		
AS3001F-12T	12	20.9	26.5	12	82	11.3	55.4	1.5	22
AS4001F-10T	10	18.5			82	11.3	56.4		
AS4001F-12T	12	20.9	26.5	12	82	11.3	56.4	1.5	22