




不锈钢(SUS316)快换接头 KQG系列

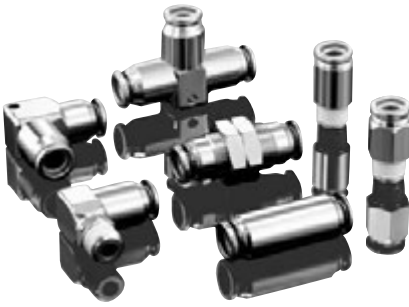

- * 除了密封圈,内部零件全为SUS316不锈钢
- * 采用氟树脂(FKM)密封圈材料
- * 最高使用温度达150℃
- * 应用于耐热、耐酸碱的食品、电子行业
- * 无润滑规格

直通接头

适合软管 ød (mm)	连接 T	型号	
ø4	M5	KQGH04-M5	
	R1/8	KQGH04-01S	
ø6	M5	KQGH06-M5	
	R1/8	KQGH06-01S	
	R1/4	KQGH06-02S	
ø8	R1/8	KQGH08-01S	
	R1/4	KQGH08-02S	
	R3/8	KQGH08-03S	
	R1/2	KQGH08-04S	
ø10	R1/4	KQGH10-02S	
	R3/8	KQGH10-03S	
ø12	R3/8	KQGH12-03S	
	R1/2	KQGH12-04S	

内六角直通接头

适合软管 ød (mm)	连接 T	型号	
ø4	M5	KQGS04-M5	
	R1/8	KQGS04-01S	
ø6	M5	KQGS06-M5	
	R1/8	KQGS06-01S	
	R1/4	KQGS06-02S	
ø8	R1/8	KQGS08-01S	
	R1/4	KQGS08-02S	
	R3/8	KQGS08-03S	
	R1/2	KQGS08-04S	
ø10	R1/4	KQGS10-02S	
	R3/8	KQGS10-03S	
ø12	R3/8	KQGS12-03S	
	R1/2	KQGS12-04S	

直通接管

适合软管 ød (mm)	型号	
ø4	KQGH04-00	
ø6	KQGH06-00	
ø8	KQGH08-00	
ø10	KQGH10-00	
ø12	KQGH12-00	

弯头

适合软管 ød (mm)	连接 T	型号	
ø4	M5	KQGL04-M5	
	R1/8	KQGL04-01S	
ø6	M5	KQGL06-M5	
	R1/8	KQGL06-01S	
	R1/4	KQGL06-02S	
ø8	R1/8	KQGL08-01S	
	R1/4	KQGL08-02S	
	R3/8	KQGL08-03S	
	R1/2	KQGL08-04S	
ø10	R1/4	KQGL10-02S	
	R3/8	KQGL10-03S	
ø12	R3/8	KQGL12-03S	
	R1/2	KQGL12-04S	

规格

使用流体	空气、水、蒸气
使用压力范围	-100kPa ~ 1MPa
环境及流体温度	-5 ~ 150℃ (不结冰)
适用润滑油	无润滑规格
密封	带密封剂
适合软管材质	FEP、PFA、尼龙、软尼龙、PU软管
适合软管外径	ø4, ø6, ø8, ø10, ø12

主要部分材料

释放套	SUS316
导向	SUS316
夹套	SUS316
密封垫	FKM
外螺纹主体	SUS316
外螺纹弯头体	SUS316
O形密封圈	FKM
限位环	SUS316
接头体	SUS316

接管弯头

适合软管 ød (mm)	型号	
ø4	KQGL04-00	
ø6	KQGL06-00	
ø8	KQGL08-00	
ø10	KQGL10-00	
ø12	KQGL12-00	

T型接头

适合软管 ød (mm)	连接 T	型号	
ø4	M5	KQGT04-M5	
	R1/8	KQGT04-01S	
ø6	M5	KQGT06-M5	
	R1/8	KQGT06-01S	
	R1/4	KQGT06-02S	
ø8	R1/8	KQGT08-01S	
	R1/4	KQGT08-02S	
	R3/8	KQGT08-03S	
	R1/2	KQGT08-04S	
ø10	R1/4	KQGT10-02S	
	R3/8	KQGT10-03S	
ø12	R3/8	KQGT12-03S	
	R1/2	KQGT12-04S	

T型接管

适合软管 ød (mm)	型号	
ø4	KQGT04-00	
ø6	KQGT06-00	
ø8	KQGT08-00	
ø10	KQGT10-00	
ø12	KQGT12-00	

Y型接管

适合软管 ød (mm)	型号	
ø4	KQGU04-00	
ø6	KQGU06-00	
ø8	KQGU08-00	
ø10	KQGU10-00	
ø12	KQGU12-00	

隔板直通接管

适合软管 ød (mm)	型号	
ø4	KQGE04-00	
ø6	KQGE06-00	
ø8	KQGE08-00	
ø10	KQGE10-00	
ø12	KQGE12-00	