


Valve terminal VTSA/VTSA-F


FESTO

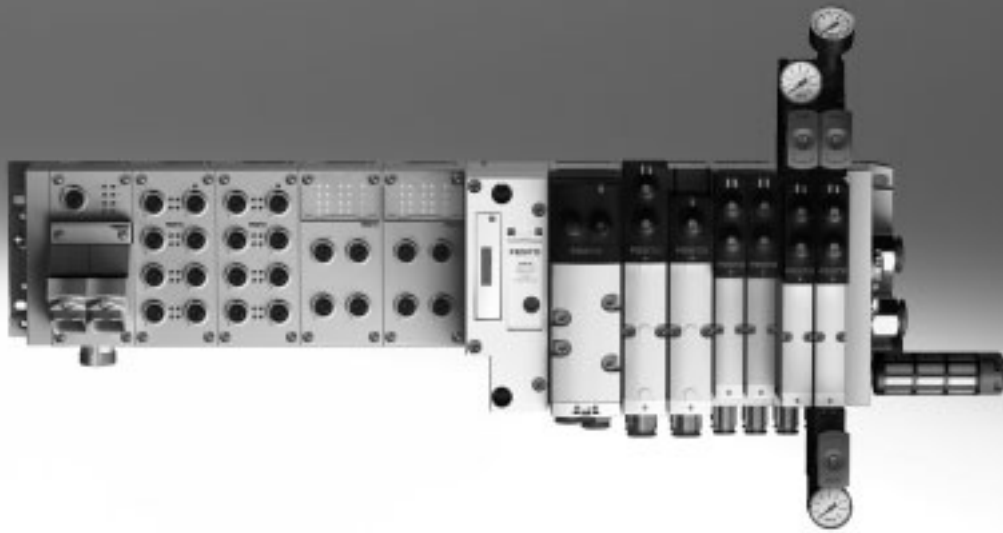

Valve terminal VTSA/VTSA-F

Key features

FESTO

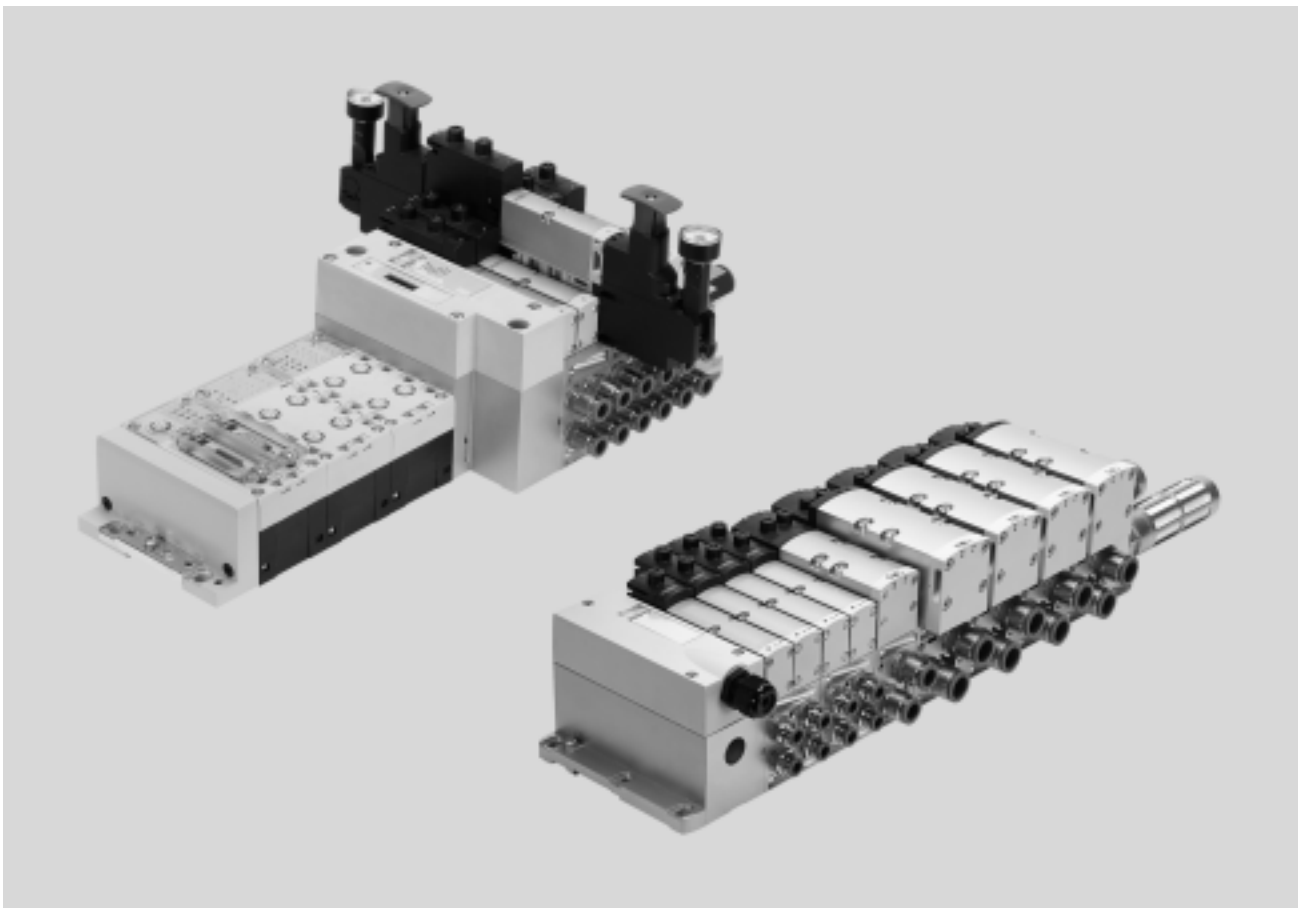

Innovative

- High-performance valves in a sturdy metal housing
- Five valve sizes on one valve terminal (width 65 mm with adapter)
- Standardised from the multi-pin plug to the fieldbus connection and control block
- Dream team: fieldbus valve terminal suitable for electrical peripherals CPX. This means:
 - Forward-looking internal communication system for controlling the valves and CPX modules
 - Four valve sizes on one valve terminal without adapters
- Valve functions for integration in control architectures of higher categories to EN ISO 13849-1

Versatile

- Modular system offering a range of configuration options
- Expandable with up to 32 solenoid coils
- Conversions and extensions are possible at any time
- Manifold sub-bases can be extended using four screws, sturdy duct separation on metal support
- Integration of innovative function modules possible
- Supply plates enable a flexible air supply and variable pressure zones
- Reverse operation
- High pressure range
– 0.9 ... 10 bar,
flow range 550 ... 4000 l/min
- Wide range of valve functions
- Valve supply: 24 V DC or 110 V AC

Reliable

- Sturdy and durable metal components
 - Valves
 - Manifold sub-bases
 - Seals
- Fast troubleshooting thanks to LEDs on the valves and diagnostics via fieldbus
- Reliable servicing thanks to valves that can be replaced quickly and easily
- Manual override, either non-detenting, non-detenting/detenting or covered
- Durable thanks to tried-and-tested piston spool valves
- Large and durable labelling system
- 100% duty cycle

Easy to install

- Assembled and inspected unit, ready for installation
- Reduced outlay on selection, ordering, installation and commissioning
- Secure mounting on wall or H-rail

 Note

The key features, valves and functions of width 65 mm are described separately in the chapter “Adaptation

to width 65 mm”, ISO size 3 (technology type 04) → Page 173.

Valve terminal VTSA/VTSA-F

Key features

Reduced downtimes:
On-the-spot diagnostics via LEDs

Width 18 mm, 26 mm,
42 mm and 52 mm can be com-
bined on a single valve terminal
without adapter

Pneumatic interface to CPX


Simple electrical connections

- Fieldbus connection via CPX
- Multi-pin plug connection with pre-assembled cable or terminal strip (Cage Clamp®)
- Control block via CPX
- AS-Interface
- Individual connection

CPX diagnostic interface for hand-
held devices (channel-oriented diag-
nostics down to the individual valve)

Quick mounting:
Direct mounting using screws or
H-rail

Safe:
Valves, outputs and logic
voltage can be switched off
separately

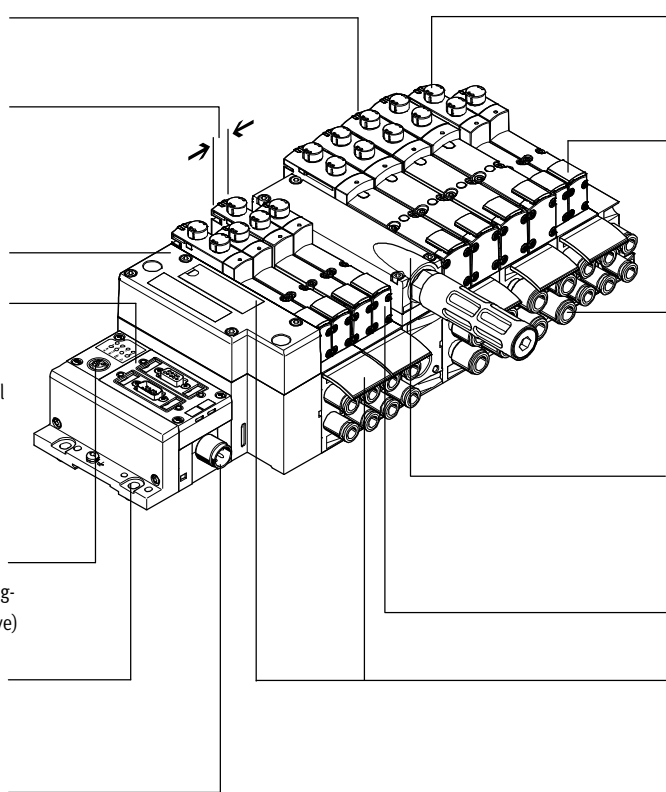

Reliable operation:
Manual override, detenting, non-
detenting/detenting or covered

Flexible:

- 32 valve positions/32 solenoid coils
- One valve series for a wide range of flow rates

Functional:
Large ports, flow-optimised ducts,
sturdy metal thread or pre-assembled
QS connections

Modular:
Air supply plates facilitate the creation of
multiple pressure zones as well as nu-
merous additional exhaust and supply
ports

Comprehensive range of valve functions

Practical:
Large inscription labels

Equipment options

Valve functions

- 2x 2/2-way valve, single solenoid, pneumatic spring, normally closed
- 2x 3/2-valve, single solenoid
 - Normally open
 - Normally open, reversible
 - Normally closed
 - Normally closed, reversible
- 2x 3/2-valve, single solenoid
 - 1x normally open, 1x normally closed
 - 1x normally open, 1x normally closed, reversible
- 5/2-way valve
 - Single solenoid, pneumatic spring/mechanical spring
 - Double solenoid
 - Double solenoid with dominant signal
- 5/2-way valves for special functions, single solenoid
 - Mechanical spring
 - Switching position sensing via inductive sensors with PNP or NPN output
 - Protection against unexpected start-up to EN 1037
 - Reversing
- 5/3-way solenoid valve
 - Mid-position pressurised
 - Mid-position closed
 - Mid-position exhausted
- 5/3-way solenoid valve for special functions
 - Switching position 14 is retained (switching position 14 is retained in the event of an emergency-off application/power failure), there is no spring return on switching position 12
 - Only for valve terminal (plug-in)
 - Mid-position exhausted or mid-position 1→2, 4→5
 - Switching position 14 is retained
 - Pneumatic spring return
- 5/3-way solenoid valve for special functions
 - Switching position 12 is retained (switching position 12 is retained in the event of an emergency-off application/power failure), there is no spring return on switching position 14
 - Only for valve terminal (plug-in)
 - Mid-position exhausted or mid-position 1→4, 2→3
 - Switching position 12 is retained
 - Pneumatic spring return
- Soft-start valve for slow and safe pressure build-up
 - High degree of safety
 - Sensor function provides feedback on switching operation

Note

The key features, valves and func-
tions of width 65 mm are described
separately in the chapter “Adaptation

to width 65 mm”, ISO size 3
(technology type 04)
→ Page 173.

Valve terminal VTSA/VTSA-F

Key features

FESTO

Special features

Individual valve on individual sub-base up to width 52 mm

Plug-in

- Electrical connection via standardised 4-pin M12 plug or via 4-pin spring-loaded terminal for configuration by the user
- Available with internal/external pilot air supply

Square plug or plug-in, with integrated piston position sensing

- Electrical connection to EN 175301-803 type C (square plug) or
- For configuration by the user via 4-pin spring-loaded terminal or
- Cable with open end

CPX terminal

- Max. 32 valve positions/
max. 32 solenoid coils
- Any compressed air supply
- Any number of pressure zones

Valve terminal with individual connection

- Max. 20 valve positions/
max. 20 solenoid coils
- Any compressed air supply
- Any number of pressure zones

Valve terminal with multi-pin plug connection


- Max. 32 valve positions/
max. 32 solenoid coils
- Parallel modular valve linking
- Any compressed air supply
- Any number of pressure zones

AS-Interface

- 1 to 8 valve positions/
max. 8 solenoid coils
- Soft-start valve for slow and safe pressure build-up

Combinable

- Valve width 18 mm: flow rate of VTSA up to 550 l/min, VTSA-F up to 700 l/min
- Valve width 26 mm: flow rate of VTSA up to 1100 l/min, VTSA-F up to 1350 l/min
- Valve width 42 mm: flow rate of VTSA up to 1300 l/min, VTSA-F up to 1860 l/min
- Valve width 52 mm: flow rate up to 2900 l/min
- Widths 18 mm, 26 mm, 42 mm, 52 mm and 65 mm can be combined on a single valve terminal (using an adapter)

 Note
Valve terminal VTSA complies with

- ISO 15407-2 in width 18 and 26 mm and
- ISO 5599-2 in width 42 and 52 mm

Valve terminal configurator → Internet: www.festo.com

A valve terminal configurator is available to help you select a suitable VTSA/VTSA-F valve terminal. This makes it much easier to order the right product.

The valve terminals are fully assembled according to your order specification and are individually checked. This reduces assembly and installation time to a minimum.

Order a valve terminal VTSA using the order code:

Ordering system for VTSA
→ Internet: vtsa

Ordering system for CPX
→ Internet: cpx

Order a valve terminal VTSA-F using the order code:


Ordering system for VTSA-F
→ Internet: vtsa-f

Ordering system for CPX
→ Internet: cpx

Valve terminal VTSA/VTSA-F

Key features

Individual pneumatic connection




Valves on individual sub-bases up to width 52 mm can be used for actuators further away from the valve terminal.

The electrical connection is established either via a standardised 4-pin M12 plug, 24 V DC (EN 61076-2-101), 4-pin spring-

loaded terminal or a cable with open end, 24 V DC or 110 V AC, which are configured by the user.

Valve terminal with individual electrical connection

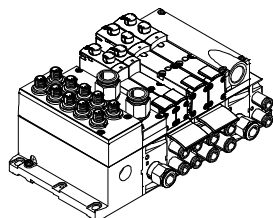


Control signals from the controller to the valve terminal are transmitted via an individual connecting cable.

The valve terminal can be equipped with max. 20 valves and max. 20 solenoid coils.

The electrical connection is established via a 5-pin M12 plug, 24 V DC.

Valve terminal with multi-pin plug connection

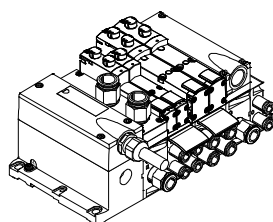


Control signals from the controller to the valve terminal are transmitted via a pre-assembled multi-wire cable or a multi-pin plug connection assembled by the user (spring-loaded terminal), which substantially reduces installation time.

The valve terminal can be equipped with max. 32 valves and max. 32 solenoid coils.

Versions

- Multi-pin plug connection with terminal strip (spring-loaded terminal), 24 V DC or 110 V AC
- Pre-assembled connecting cable, 24 V DC
- Sub-D plug connector for assembly by the user, 37-pin, 24 V DC
- Round plug connector M23, 19-pin, 24 V DC

AS-Interface connection

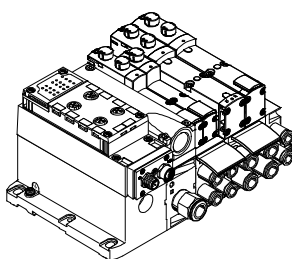

A special feature of the AS-Interface is the simultaneous transmission of data and supply power via a two-wire cable. The encoded cable profile prevents connection with incorrect polarity. The valve terminal with AS-Interface is available in the following versions:

- With one to eight modular valve positions (max. 8 solenoid coils). This corresponds to 1 to 8 VSVA valves.
- With all available valve functions. The connection technology used for the inputs can be selected as with

CPX: M8, M12, quick connection, Sub-D, spring-loaded terminal (terminals to IP20).

Additional information
➔ Internet: as-interface



Note

The valve terminal VTSA/VTSA-F with AS-Interface connection is based on the same electrical interlinking module as the valve terminal with multi-pin plug connection. This means it is possible to convert a valve terminal with multi-pin plug connection using

an AS-Interface module (➔ 131). The technical specifications of the AS-Interface system must be observed in this case.


➔ Page 58
➔ Internet: as-interface

Valve terminal VTSA/VTSA-F

Key features

FESTO

Valve terminal with fieldbus connection from the CPX system

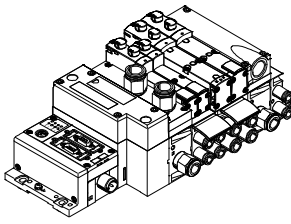

An integrated fieldbus node manages the communication connection with a higher-order PLC. This enables a space-saving pneumatic and electronic solution.


Valve terminals with fieldbus interfaces from the CPX system can be configured with up to 16 manifold sub-bases. With 2 solenoid coils per connection, up to 32 solenoid coils can thus be actuated.

Versions

- PROFIBUS
- INTERBUS
- DeviceNet
- CANopen
- CC-Link
- EtherNet/IP
- EtherCAT
- Modbus TCP
- PROFINET
- POWERLINK
- Sercos III

➔ Internet: [cpx](#)

Valve terminal with control block connection from the CPX system

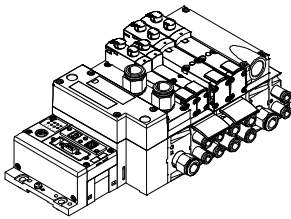


A controller integrated in the Festo valve terminal enables the construction of stand-alone control units with protection to IP65 without a control cabinet thanks to two different operating modes.

In the slave operating mode, these valve terminals can be used for intelligent preprocessing and are therefore ideal modules for designs using decentralised intelligence.

In the master operating mode, terminal groups can be designed with many options and functions that can autonomously control a medium-sized machine/system.

➔ Internet: [cpx](#)

CP string extension from the CPX system

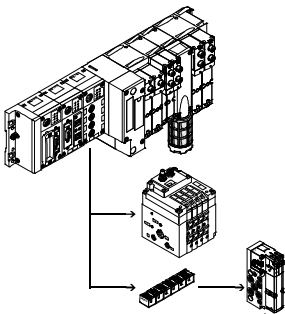

The optional CP string extension enables additional valve terminals and I/O modules to be connected to the fieldbus node of the CPX terminal on up to 4 CP strings. Different input and output modules as well as CPV-SC, CPV and CPA valve terminals can be connected.

The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All the required electrical signals are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.

One CP string offers:


- 32 input signals
- 32 output signals for output modules 24 V DC or solenoid coils
- Logic and sensor supply for the input modules
- Load voltage supply for the valve terminals
- Logic supply for the output module

➔ Internet: [ctec](#)

Valve terminal VTSA/VTSA-F

Key features – Valves

Solenoid valve with switching position sensing, width 18 mm, 26 mm




The 5/2-way single solenoid valve with spring return features switching position sensing. The normal position of the piston spool is monitored.

Designed as a plug-in or individual connection valve with pilot valves to ISO 15218 and square plug type C. This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC.

It is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

→ Page 167

Control block with safety function, width 26 mm



5/2-way solenoid valve
These valves are used for special applications, for example for:


- Protecting against unexpected start-up
- Safe reversing
- Drives in manually loaded devices

This control block is suitable for use as a press safety valve to EN 962.

This valve is a safety device in accordance with the Machinery Directive 2006/42/EC.

→ Page 145

Pilot air switching valve, width 18 mm, 26 mm



The pilot air switching valve is a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S. It enables the pilot air supply to be verifiably switched on and off (sensor function) from duct 1 to 14

The piston position sensing feature is realised by means of an inductive PNP proximity sensor with cable and push-in connector in the size M12x1 to EN 61076-2-104.

This valve is not a safety device in

accordance with the Machinery Directive 2006/42/EC. It is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

→ Page 151




Note

The pilot air switching valve can only be operated on the valve terminal VTSA/VTSA-F in combination with a right-hand end plate for external pilot

air type VABE-S6-1RZ- Port 14 on the right-hand end plate must be sealed for this.

Soft-start valve, module width 43 mm



The soft-start valve is separately electrically actuated, independently of the multi-pin plug, AS-Interface or field-bus connection, via a 4-pin plug to ISO 15407-1 or optionally via an M12 adapter. The valve can optionally be ordered with a sensor that monitors switching

of the soft-start valve. The soft-start valve can supply the valve terminal or one or more pressure zones with supply air.

The pressure build-up for each pressure zone is optimised for the application directly at the valve terminal by

setting the switch-over pressure and the filling time.

A maximum of 5 soft-start valves can be integrated on one valve terminal in this way.


→ Page 160

Valve terminal VTSA/VTSA-F

Key features – Valves

FESTO

Vacuum block, module width 53 mm



5/3-way solenoid valve, with switching position 12 retained. The vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm, and integrated into the valve terminal VTSA/VTSA-F. The vacuum block is supplied with

electricity and the vacuum is sensed via a standardised 4-pin M12 plug. The vacuum block is used in conjunction with a suction gripper to receive, hold and place components. Placing is realised by means of an adjustable ejector pulse. The vacuum block is

equipped with an air-saving function. In the absence of electric or pneumatic supply the valve reverts to switching position 12 "create vacuum".

→ Page 167

5/3-way solenoid valve for special functions

For holding, blocking a movement (mechanically)

5/3-way solenoid valve for special functions; port 2 is pressurised, port 4 exhausted. Switching position 14 is retained (code SA).

5/3-way solenoid valve for special functions; port 2 is pressurised, port 4 exhausted. Switching position 12 is retained (code SE).

Possible applications:

- Using lifting cylinders
- Using rotary cylinders

Possible applications:

- Using lifting cylinders
- Using rotary cylinders

For pressureless switching, self-latching loop, pneumatic operation

5/3-way solenoid valve for special functions (3 phases). Mid-position is exhausted. Switching position 14 is retained.

5/3-way solenoid valve for special functions (3 phases). Mid-position is exhausted. Switching position 12 is retained.

Possible applications:

- Pneumatic manual clamps for devices (inserting stations)

Possible applications:

- Pneumatic manual clamps for devices (inserting stations)

Valve terminal VTSA/VTSA-F

Peripherals

FESTO

Modular pneumatic peripherals

The modular design of the valve terminal VTSA/VTSA-F enables maximum flexibility right from the planning stage and offers maximum ease of service in operation.

The system consists of manifold sub-bases and valves.

The manifold sub-bases are screwed together and thus form the support system for the valves.


Inside the manifold sub-bases are the ducts for supplying compressed air to and exhausting the valve terminal, as well as the working ports for the pneumatic cylinders for each valve.

Each manifold sub-base is connected to the next using four screws.


Individual valve terminal sections can be isolated and further blocks easily inserted by loosening these screws.

This ensures that the valve terminal can be rapidly and reliably extended.


Basic system modularity

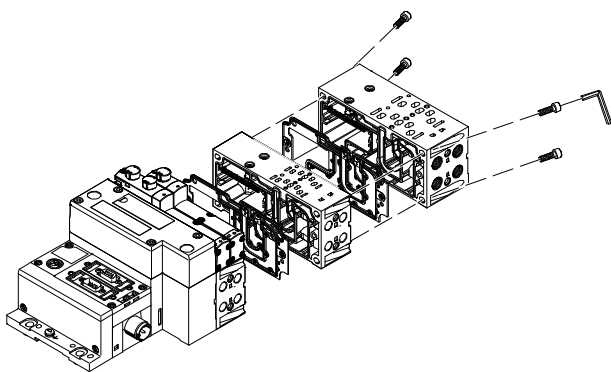

Valve modularity

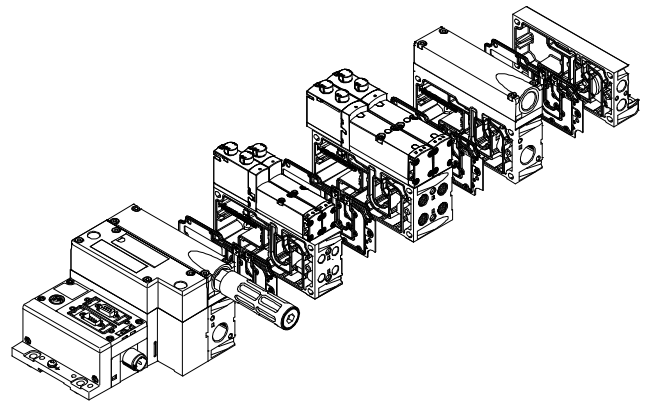

Vertical stacking modularity

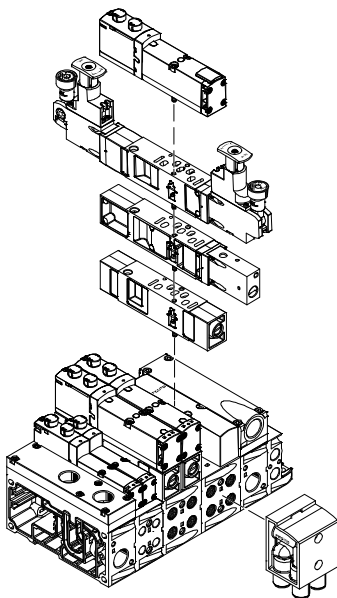

Note

See also "Adaptation to width 65 mm", ISO size 3

(technology type 04)
→ page 173

Valve terminal VTSA/VTSA-F

Peripherals

Modular electrical peripherals


The manner in which the valves are actuated differs according to whether you are using a multi-pin terminal or fieldbus terminal.

The VTSA/VTSA-F with CPX interface is based on the internal bus system of the CPX and uses this communication system for all solenoid coils and a range of electrical input and output functions.


Parallel linking enables the following:

- Transmission of switching information
- Compact design
- Position-based diagnostics
- Separate voltage supply for valves
- Flexible conversion without address shifting
- Option of CP interface
- CPX-FEC as stand-alone controller with access via Ethernet and web server
- Transmission of status, parameter and diagnostic data
→ Internet: cpx


VTSA/VTSA-F with electrical peripherals CPX

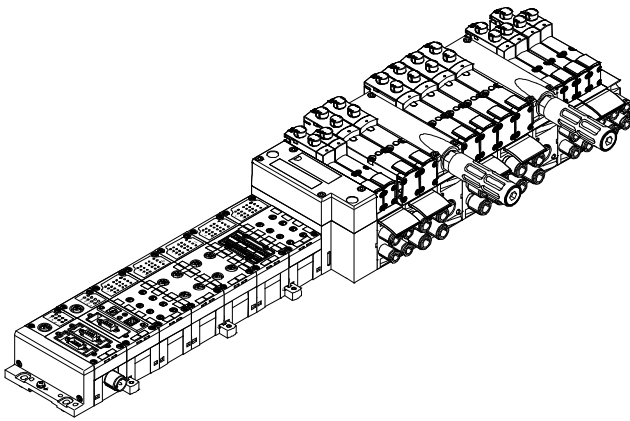

Modularity with electrical peripherals CPX

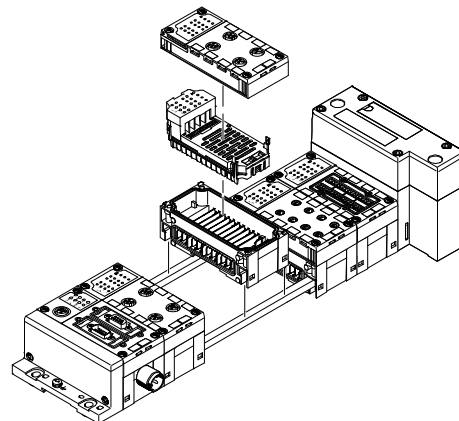

CPX terminal in metal design

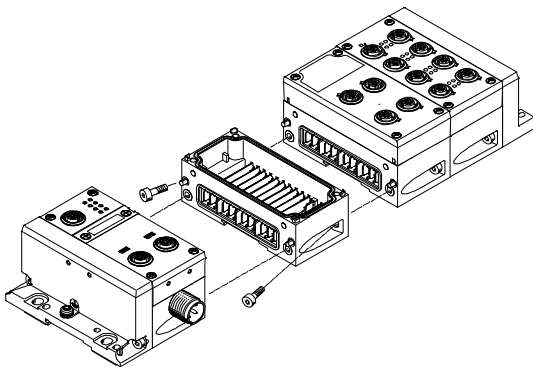

The CPX modules in metal design are mechanically connected to one another using an angled fitting. The CPX terminal can thus be expanded at any time.

Note

The CPX connection blocks are also available in a metal design. This means a complete solution in a sturdy metal design can be selected for applications of the valve terminal VTSA/VTSA-F in welding environments.

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components

Valve terminal widths

Order code for VTSA:

- 44E-... for the electrical components
- 44P-... for the pneumatic components

Order code for VTSA-F:

- 45E-... for the electrical components
- 45P-... for the pneumatic components

Regardless of the type of actuation (e.g. multi-pin plug, fieldbus, etc.), valve terminals VTSA/VTSA-F in the widths

- 18 mm
- 26 mm
- 42 mm
- 52 mm

can be combined without adapters.


This enables a flow range of 400 l/min to 2,900 l/min in the case of VTSA and 700 l/min to 2,900 l/min in the case of VTSA-F

to be covered on one valve terminal. A wide range of valve functions and vertical stacking components are available for all widths.

Valves with a width of 65 mm can be mixed with other widths. However, these are only configured after the adapter plate VABA and are thus always at the end of the valve terminal configuration.

See “Adaptation to width 65 mm”, ISO size 3 (technology type 04)

→ Page 173

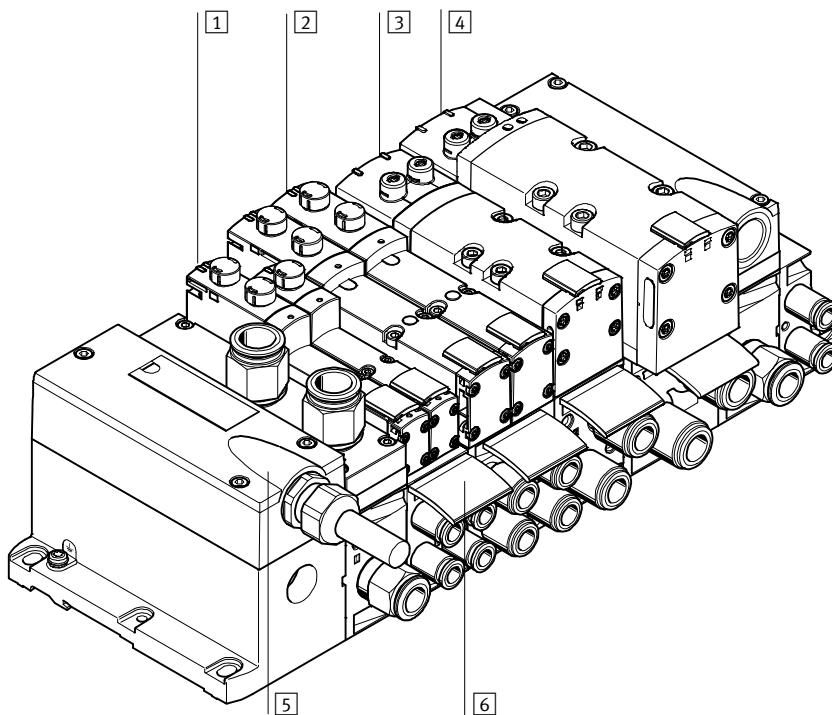

| | Brief description | → Page/Internet | |
|---|---------------------------|---|-----|
| 1 | Valve | Width 18 mm | 124 |
| 2 | Valve | Width 26 mm | 124 |
| 3 | Valve | Width 42 mm | 124 |
| 4 | Valve | Width 52 mm | 124 |
| 5 | Multi-pin plug connection | Via multi-pin cable, 24 V DC | 131 |
| 6 | Inscription labels | For manifold sub-base, sub-base, 90° connection plate | 133 |

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components


Individual sub-base, width 18 mm, ISO 15407-2

Order code:
 • Using individual part numbers


Individual sub-bases can be equipped with any valve.

The electrical connection is established via a standardised 4-pin M12 plug (EN 61076-2-101) or it can be configured by the user via a 4-pin clamped terminal connection/open cable end.

Width 18 mm with spring-loaded terminal or cable (open end)

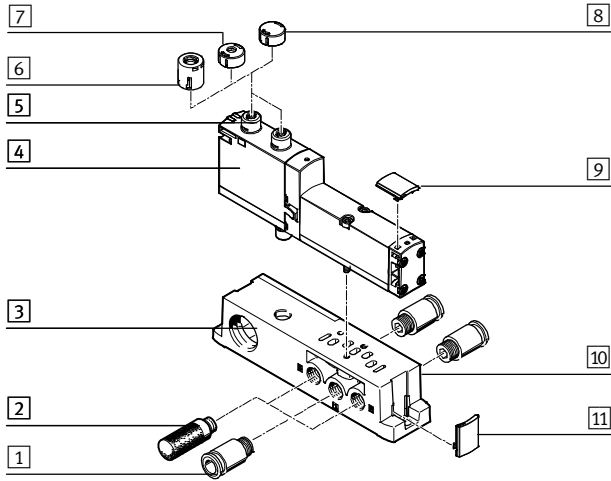

Width 18 mm with M12 plug

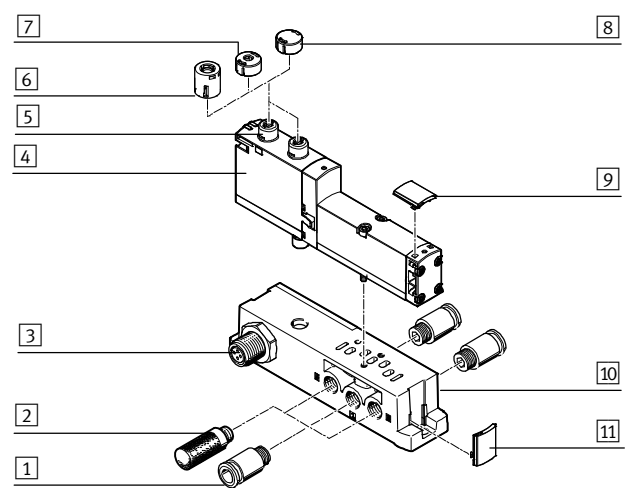

| | Brief description | → Page/Internet |
|----|---|-----------------|
| 1 | Fitting G1/8 for air/exhaust ports (1, 3, 5) and working ports (2, 4) | 207 |
| 2 | Silencer U-1/8-B for exhaust ports (3, 5) | 208 |
| 3 | Electrical connection Spring-loaded terminal, cable (open end) or plug M12 ¹⁾ , 4-pin | – |
| 4 | Valve VSVA Width 18 mm | 90 |
| 5 | Manual override Non-detenting/detenting, per solenoid coil | – |
| 6 | Cover cap, heavy duty For manual override, non-detenting heavy duty, detenting via accessory | 130 |
| 7 | Cover cap, coded For non-detenting manual override (limited function) | 130 |
| 8 | Cover cap, covered MO covered by cover cap – operation of MO prevented | 130 |
| 9 | Inscription label holder For valves | 133 |
| 10 | Individual sub-base For valve VSVA | 205 |
| 11 | Inscription label holder For manifold block | 133 |

1) Only for 24 V DC


Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components


FESTO

Individual sub-base, width 26 mm, ISO 15407-2

With spring-loaded terminal or cable (open end)

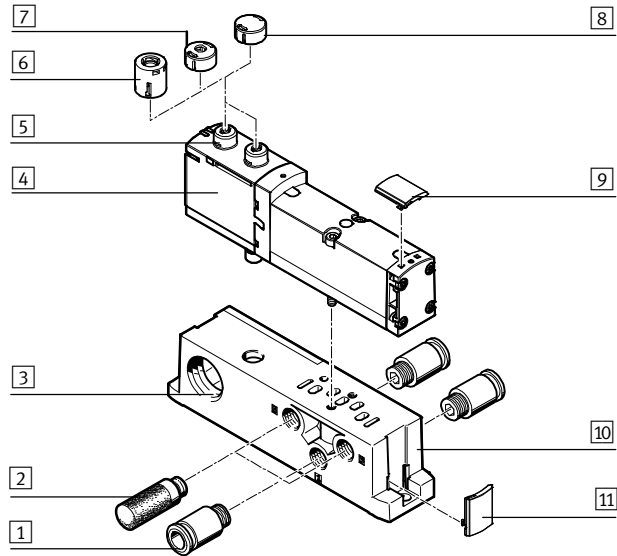

With M12 push-in connector

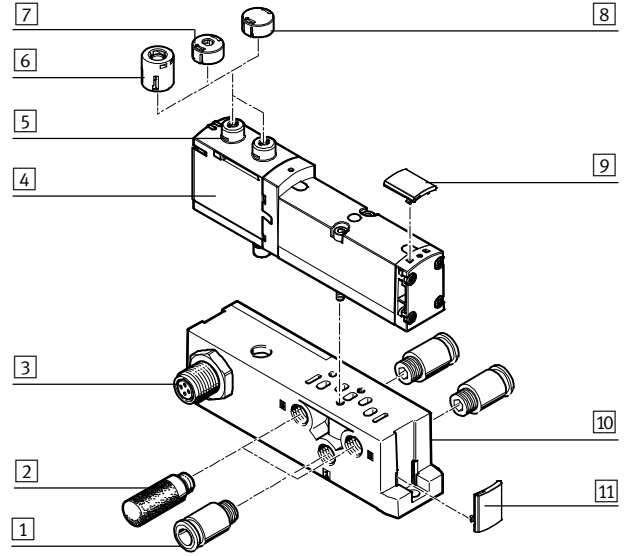

| | Brief description | → Page/Internet | |
|----|--------------------------|--|-----|
| 1 | Fitting | G $\frac{1}{4}$ for air/exhaust ports (1, 3, 5) and working ports (2, 4) | 207 |
| 2 | Silencer | U- $\frac{1}{4}$ -B for exhaust ports (3, 5) | 208 |
| 3 | Electrical connection | Spring-loaded terminal, cable (open end) or plug M12 ¹⁾ , 4-pin | – |
| 4 | Valve VSVA | Width 26 mm | 99 |
| 5 | Manual override | Non-detenting/detenting, per solenoid coil | – |
| 6 | Cover cap, heavy duty | For manual override, non-detenting heavy duty, detenting via accessory | 130 |
| 7 | Cover cap, coded | For non-detenting manual override (limited function) | 130 |
| 8 | Cover cap, covered | MO covered by cover cap – operation of MO prevented | 130 |
| 9 | Inscription label holder | For valves | 133 |
| 10 | Individual sub-base | For valve VSVA | 205 |
| 11 | Inscription label holder | For manifold block | 133 |

1) Only for 24 V DC


Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components


FESTO

Individual sub-base, width 42 mm, ISO 5599-2

With spring-loaded terminal or cable (open end)

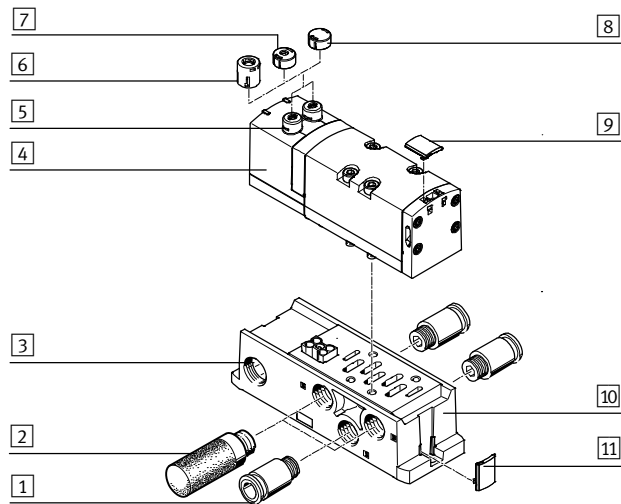

With M12 plug

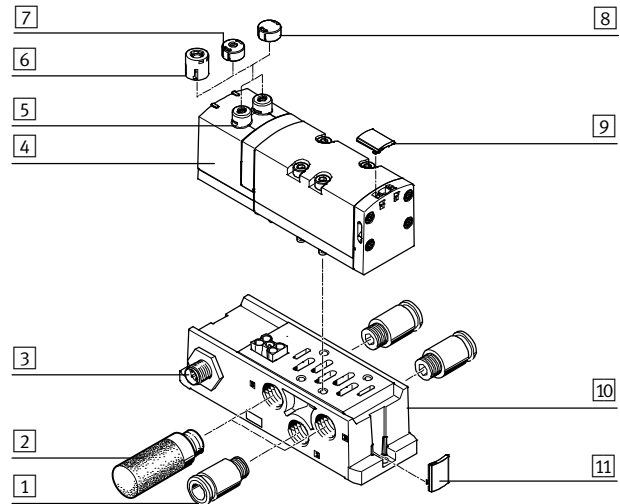

| | Brief description | → Page/Internet | |
|----|--------------------------|--|-----|
| 1 | Fitting | G3/8 for air/exhaust ports (1, 3, 5) and working ports (2, 4) | 207 |
| 2 | Silencer | U-3/8-B for exhaust ports (3, 5) | 208 |
| 3 | Electrical connection | Spring-loaded terminal, cable (open end) or plug M12 ¹⁾ , 4-pin | – |
| 4 | Valve VSVA | Width 42 mm | 108 |
| 5 | Manual override | Non-detenting/detenting, per solenoid coil | – |
| 6 | Cover cap, heavy duty | For manual override, non-detenting heavy duty, detenting via accessory | 130 |
| 7 | Cover cap, coded | For non-detenting manual override (limited function) | 130 |
| 8 | Cover cap, covered | MO covered by cover cap – operation of MO prevented | 130 |
| 9 | Inscription label holder | For valves | 133 |
| 10 | Individual sub-base | For valve VSVA | 205 |
| 11 | Inscription label holder | For manifold block | 133 |

1) Only for 24 V DC


Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components


FESTO

Individual sub-base, width 52 mm, ISO 5599-2

With spring-loaded terminal or cable (open end)

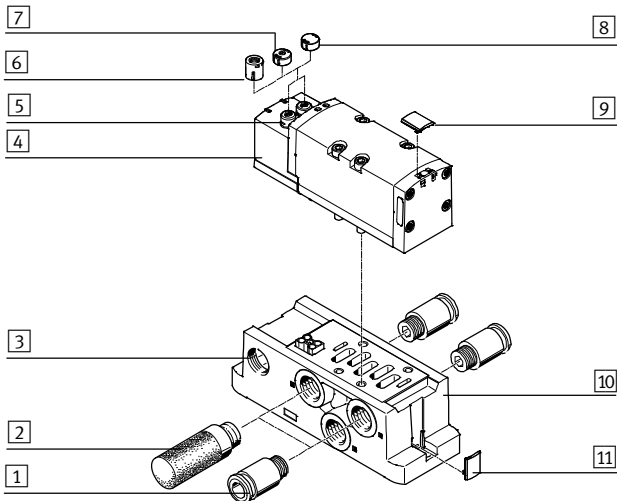

With M12 plug

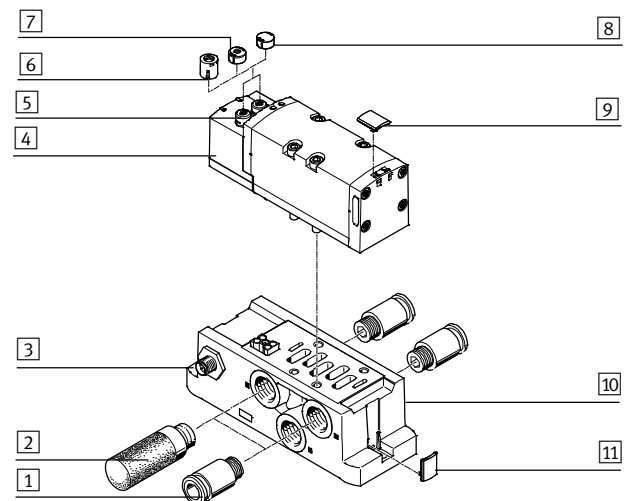

| | Brief description | → Page/Internet | |
|----|--------------------------|--|-----|
| 1 | Fitting | G $\frac{1}{2}$ for air/exhaust ports (1, 3, 5) and working ports (2, 4) | 207 |
| 2 | Silencer | U- $\frac{1}{2}$ -B for exhaust ports (3, 5) | 208 |
| 3 | Electrical connection | Spring-loaded terminal, cable (open end) or plug M12 ¹⁾ , 4-pin | – |
| 4 | Valve VSVA | Width 52 mm | 116 |
| 5 | Manual override | Non-detenting/detenting, per solenoid coil | – |
| 6 | Cover cap, heavy duty | For manual override, non-detenting heavy duty, detenting via accessory | 130 |
| 7 | Cover cap, coded | For non-detenting manual override (limited function) | 130 |
| 8 | Cover cap, covered | MO covered by cover cap – operation of MO prevented | 130 |
| 9 | Inscription label holder | For valves | 133 |
| 10 | Individual sub-base | For valve VSVA | 205 |
| 11 | Inscription label holder | For manifold block | 133 |

1) Only for 24 V DC

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components

Valve terminal pneumatics

The manifold sub-bases for valves with a width of 18 or 26 mm are either prepared for


- 2 single solenoid valves or
- 2 double solenoid valves.

The manifold sub-bases for valves with a width of 42 or 52 mm are suitable for

- 1 single solenoid valve or
- 1 double solenoid valve.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.

- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

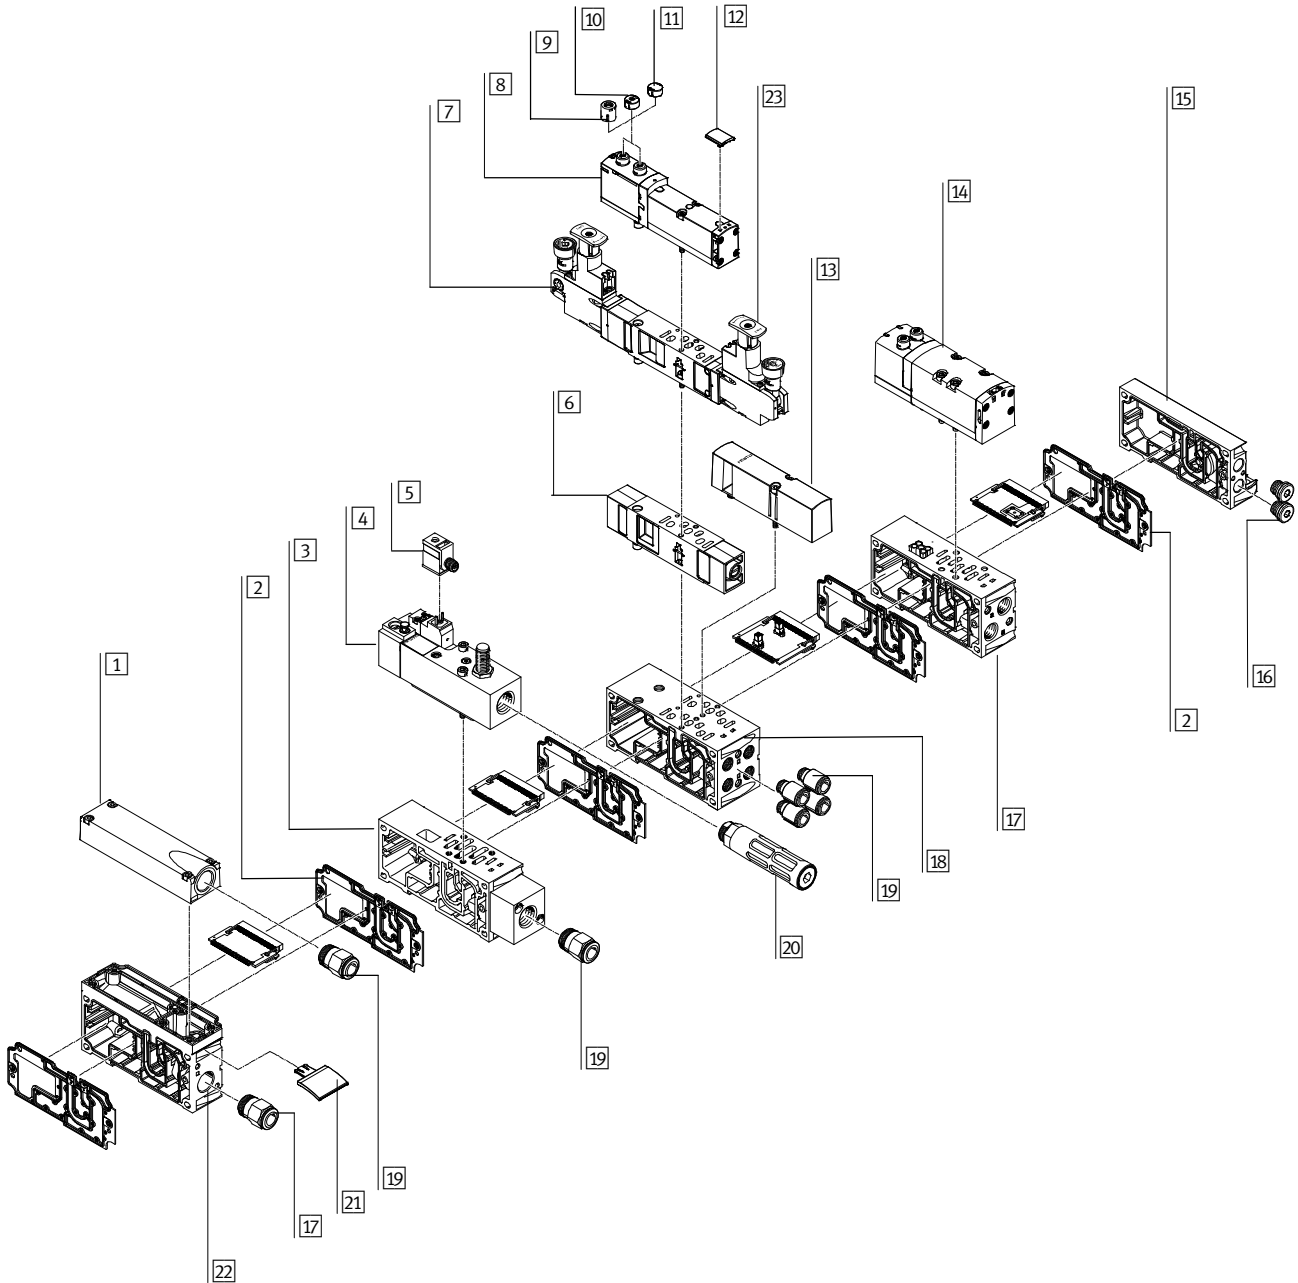

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components

FESTO

| Valve terminal pneumatics | | |
|---------------------------|-----------------------------------|--|
| | Brief description | → Page/Internet |
| 1 | Exhaust port cover | For ducted exhaust air (ports 3 and 5 combined) |
| 2 | Duct separation/seal | – |
| 3 | Manifold sub-base | For soft-start valve |
| 4 | Soft-start valve | For slow and safe pressure build-up |
| 5 | Plug socket | – |
| 6 | Flow control plate | – |
| 7 | Pressure regulator plate | – |
| 8 | Valve | Width 18 mm or 26 mm |
| 9 | Cover cap, heavy duty | For manual override, non-detenting heavy duty, detenting via accessory |
| 10 | Cover cap, coded | For non-detenting manual override (limited function) |
| 11 | Cover cap, covered | MO covered by cover cap – operation of MO prevented |
| 12 | Inscription label holder | For valve |
| 13 | Blanking plate | For unused valve position (vacant position) |
| 14 | Valve | Width 42 mm or 52 mm |
| 15 | End plate with pilot air selector | – |
| 16 | Blanking plug | – |
| 17 | Manifold sub-base VTSA | For valves with a width of 42 mm or 52 mm |
| 17 | Manifold sub-base VTSA-F | For valves with a width of 42 mm or 52 mm |
| 18 | Manifold sub-base VTSA | For valves with a width of 18 mm or 26 mm |
| 18 | Manifold sub-base VTSA-F | For valves with a width of 18 mm or 26 mm |
| 19 | Fittings | – |
| 20 | Silencer | – |
| 21 | Inscription label holder | For manifold sub-base, sub-base, 90° connection plate |
| 22 | Air supply plate | – |
| 23 | Control element | Regulator knobs in different versions |



Note

Special applications for the valve terminal, such as:

- Solenoid valve with switching position sensing
 - Control block with safety function
 - Pilot air switching valve
 - Soft-start valve
 - Vacuum block
- are listed after → Accessories – General

Valve terminal VTSA/VTSA-F

Peripherals – Electrical components

Valve terminal with individual electrical connection

Order code for VTSA:

- 44E-... for the electrical components
- 44P-... for the pneumatic components

Order code for VTSA-F:

- 45E-... for the electrical components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with individual electrical connection can be expanded with up to 20 valves with max. 20 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are either prepared for

- 2 single solenoid valves or
- 2 double solenoid valves.


and the manifold sub-bases for valves with a width of 42, 52 and 65 mm are prepared for

- 1 single solenoid valve or
- 1 double solenoid valve.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.
- The electrical connection is established via a 5-pin M12 plug (24 V DC).

- Valves with a width of 65 mm cannot be mixed with other widths – these are always at the end of the valve terminal configuration. See “Adaptation to width 65 mm”, ISO size 3 (technology type 04)

→ Page 173

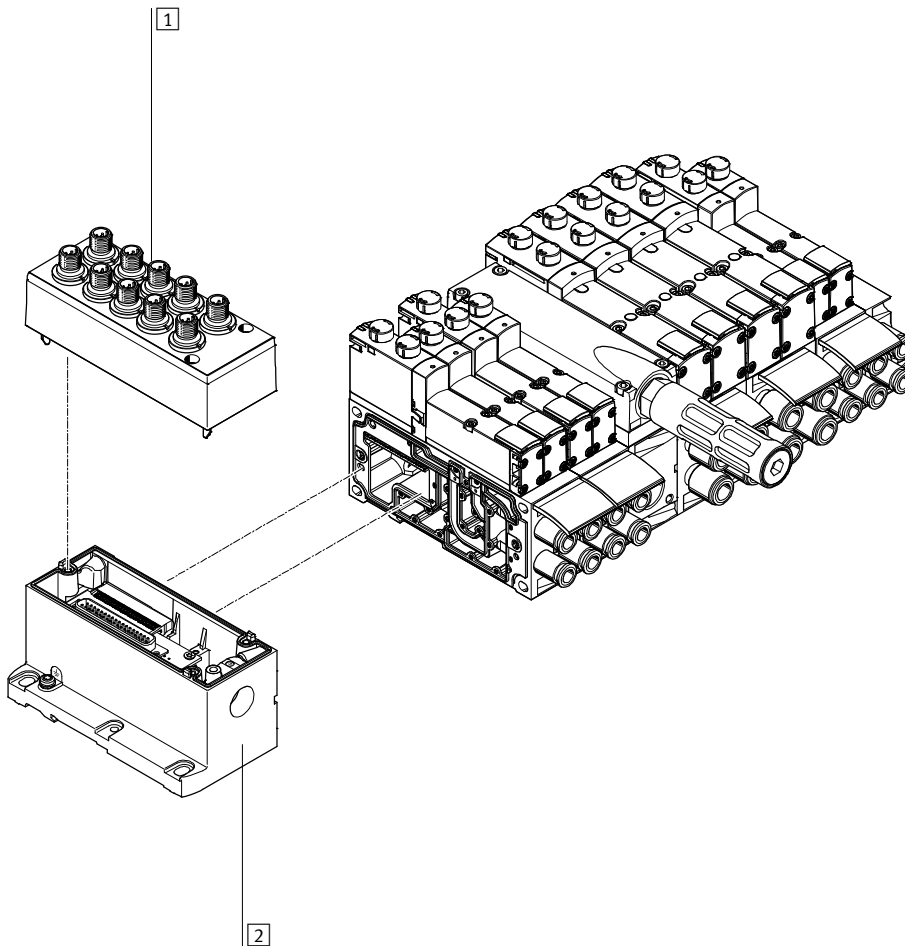

| | Brief description | → Page/Internet |
|---|--|-----------------|
| 1 | Cover For individual connection | 131 |
| 2 | Multi-pin plug connection Individual connection with M12, 10-way or 6-way (including cover) | 131 |

Valve terminal VTSA/VTSA-F

Peripherals – Electrical components

Valve terminal with electrical multi-pin plug connection

Order code for VTSA:

- 44E-... for the electrical components
- 44P-... for the pneumatic components

Order code for VTSA-F:

- 45E-... for the electrical components
- 45P-... for the pneumatic components


Valve terminals VTSA/VTSA-F with electrical multi-pin plug connection can be expanded with up to 32 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are prepared for

- 2 single solenoid valves or
 - 2 double solenoid valves
- and the manifold sub-bases for valves with a width of 42, 52 and 65 mm are prepared for
- 1 single solenoid valve or
 - 1 double solenoid valve.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.
- The following multi-pin plug connections to IP65 are available:
 - 37-pin Sub-D connection (24 V DC): the connecting cable can be ordered in lengths of 2.5 m, 5 m and 10 m for max. 8, 22 or 32 solenoid coils respectively.

- Terminal strip (24 V DC or 110 V AC) 19-pin round plug connector (24 V DC)
- Valves with a width of 65 mm cannot be mixed with other widths – these are always at the end of the valve terminal configuration. See “Adaptation to width 65 mm”, ISO size 3 (technology type 04)

→ Page 173

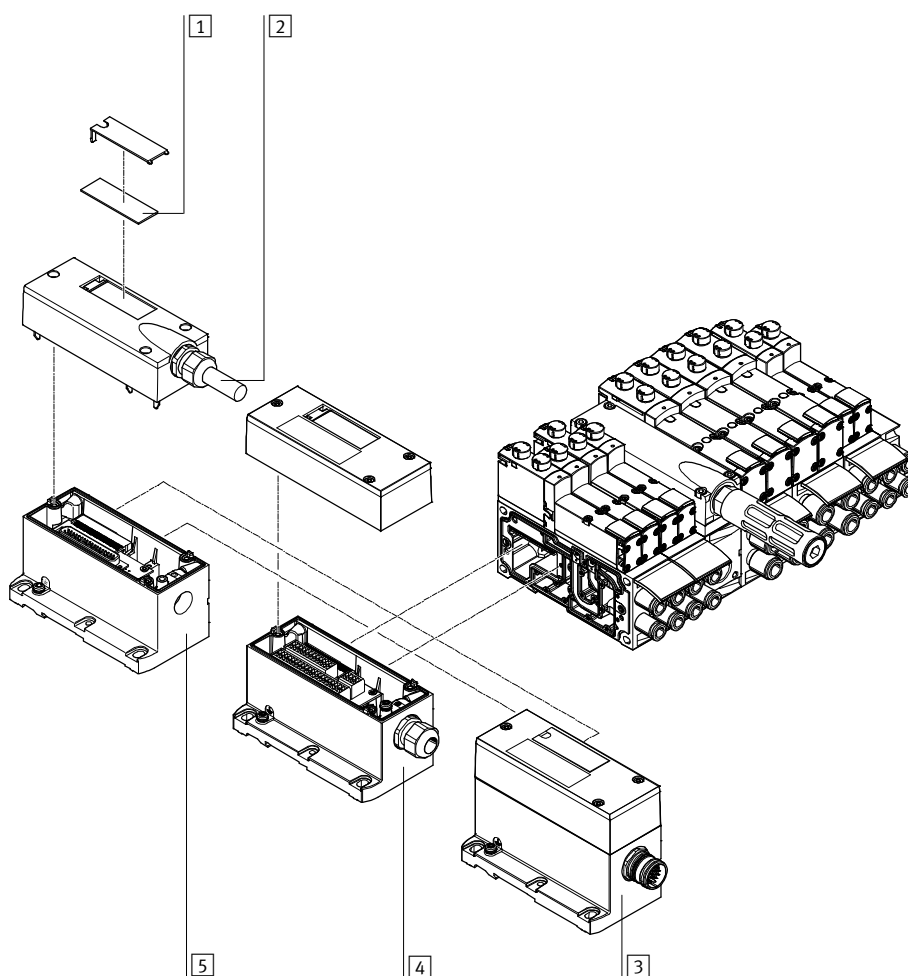

| | Brief description | → Page/Internet | |
|---|---------------------------|---|-----|
| 1 | Inscription labels | Large, for multi-pin plug connection | – |
| 2 | Multi-pin plug cable | – | 132 |
| 3 | Multi-pin plug connection | Via M23 round plug connection, 24 V DC | 131 |
| 4 | Multi-pin plug connection | Via terminal strip (Cage Clamp®), 24 V DC or 110 V AC | 131 |
| 5 | Multi-pin plug connection | Via multi-pin cable 24 V DC | 131 |

Valve terminal VTSA/VTSA-F

Peripherals – Electrical components

Valve terminal with AS-Interface connection

Order code for VTSA:

- 52E-... for the electrical components
- 44P-... for the pneumatic components

Order code for VTSA-F:

- 52E-... for the electrical components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are either prepared for

- 2 single solenoid valves or
- 2 double solenoid valves.

and the manifold sub-bases for valves with a width of 42, 52 and 65 mm are prepared for


- 1 single solenoid valve or
- 1 double solenoid valve.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.

- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

- Valves with a width of 65 mm cannot be mixed with other widths – these are always at the end of the valve terminal configuration. See “Adaptation to width 65 mm”, ISO size 3 (technology type 04)

→ Page 173

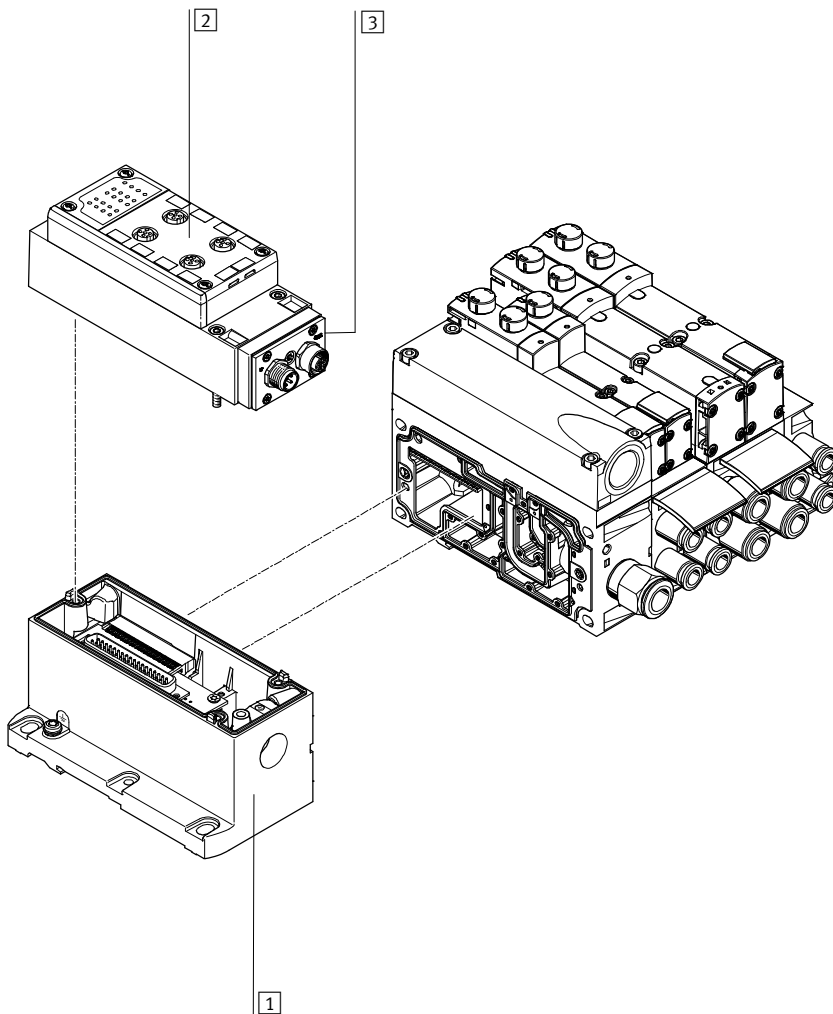

| | Brief description | → Page/Internet |
|---|-----------------------------------|--|
| 1 | Multi-pin plug connection | Can be ordered together with the AS-Interface module as an electrical connection for AS-Interface 131 |
| 2 | Connection block for AS-Interface | – 132 |
| 3 | AS-Interface module | – 131 |

Valve terminal VTSA/VTSA-F

Peripherals – Electrical components

Valve terminal with fieldbus connection, control block (electrical peripherals CPX)

Order code:

- 50E-... for the electrical peripherals, plastic manifold module
- 51E-... for the electrical peripherals, metal manifold module
- 53E-... for the electrical peripherals, for control cabinet installation

For VTSA:

- 44P-... for the pneumatic components

For VTSA-F:

- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with fieldbus interface can be expanded with up to 32 valves with max. 32 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are either prepared for

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42, 52 and 65 mm are prepared for
- 1 single solenoid valve or
- 1 double solenoid valve

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

Each valve position can be equipped with any valve or a blanking plate. The rules for CPX apply to the equipment that can be used in combination with the electrical peripherals CPX.


In general:

- Max. 10 electrical modules
- Digital inputs/outputs
- Analogue inputs/outputs

- Parameterisation of inputs and outputs
- Integrated convenient diagnostic system
- Preventive maintenance concepts

- Valves with a width of 65 mm cannot be mixed with other widths – these are always at the end of the valve terminal configuration. See “Adaptation to width 65 mm”, ISO size 3 (technology type 04)

→ Page 173

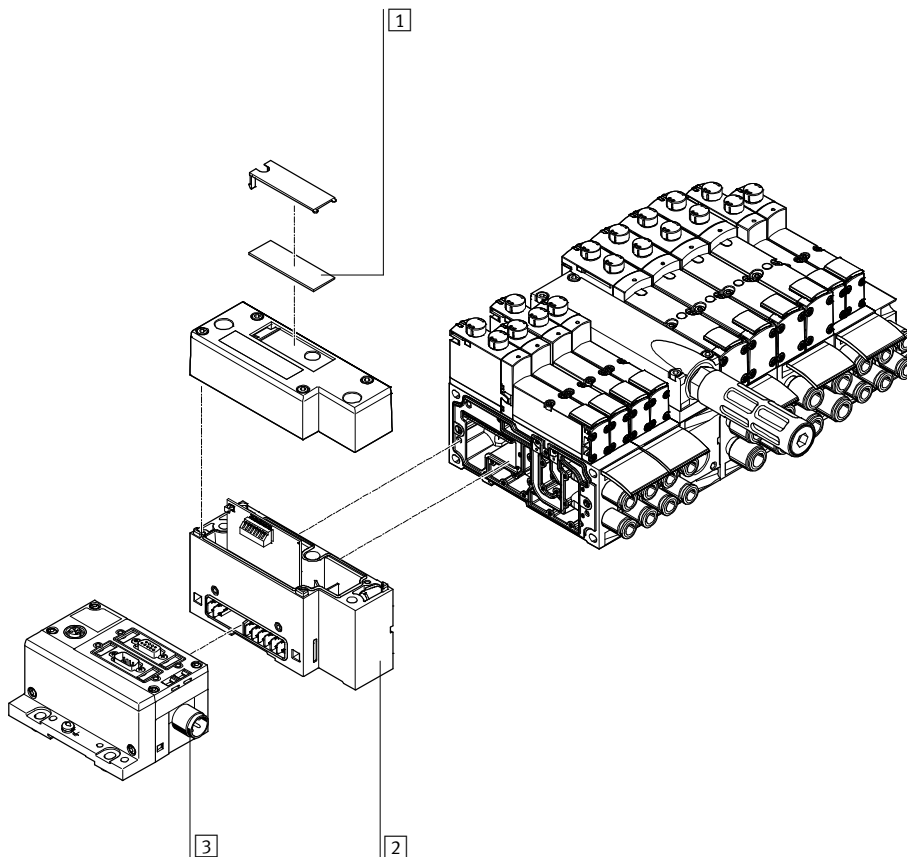

| | Brief description | → Page/Internet |
|---|--|-----------------|
| 1 | Inscription labels Large, for pneumatic interface CPX | – |
| 2 | Pneumatic interface | 131 |
| 3 | Fieldbus interface | cpX |

Valve terminal VTSA/VTSA-F

Peripherals – Electrical components


Valve terminal with fieldbus/multi-pin plug connection and individually electrically actuated valve

In applications with specific emergency off conditions, it may be necessary to switch one or more valves separately from the valve terminal controller. Standard valves (VSVA) with individual electrical connection (round or square plug) are mounted on the


valve terminal to this end. In order for protection class IP65 to be achieved, the functionless opening in the sub-base for the electrical connection must be sealed. A sealing cap is available for the 18 mm and 26 mm widths. With

manifold or individual sub-bases, valves with width 42 mm and 52 mm must be used with a seal to comply with the IP protection class (see → page 130). For central control of the valve terminal via a multi-pin plug or fieldbus

connection, the valve position occupied in this way acts like a vacant position, i.e. the assigned address in the fieldbus node or the corresponding connection in the multi-pin plug connection is occupied.

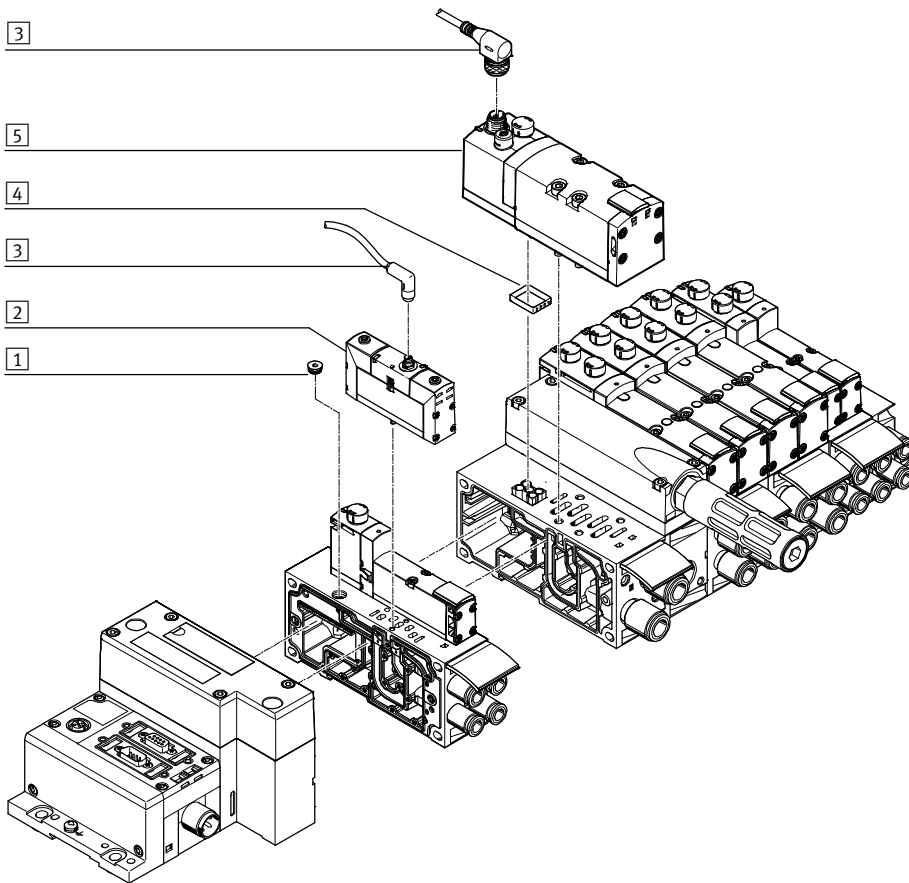

| | Brief description | → Page/Internet | |
|---|-------------------|---|-------------|
| 1 | Sealing cap | For sealing the electrical connection on the sub-base | 130 |
| 2 | Valve | Width 18 mm or width 26 mm | valves vsva |
| 3 | Connecting cable | – | valves vsva |
| 4 | Seal | For ensuring the IP protection class (with width 42 mm and 52 mm) | 130 |
| 5 | Valve | Width 42 mm or width 52 mm | valves vsva |

 Note


Standard valves VSVA can be used for valve terminal allocation. A vacant position must be provided for this in the valve terminal configurator.

The corresponding standard valve VSVA can be ordered on the Internet at:
→ vsva

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Manifold sub-base



VTSA/VTSA-F is based on a modular system which consists of manifold sub-bases and valves. The VTSA-F manifold sub-bases are designed to optimise flow. Manifold sub-bases are available for valve widths 18 mm and 26 mm in a double grid, i.e. two valves per manifold sub-base. For valves with a width of 42 mm or 52 mm, there are manifold sub-bases with one valve per sub-base. The manifold sub-base contains a duct

seal and an electrical interlinking module. They can be freely mixed within a valve terminal. The manifold sub-bases are screwed together and thus form the support system for the valves. Inside the manifold sub-bases are the ducts for supplying compressed air to and exhausting the valve terminal, as well as the working ports for the pneumatic cylinders for each valve. Each manifold sub-base is connected to the next using four


screws. Individual valve terminal sections can be isolated and further manifold sub-bases inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.

See also “Adaptation to width 65 mm”, ISO size 3 (technology type 04)


➔ Page 173

Port patterns on the manifold sub-base for one valve position


Width 18 mm




Width 26 mm



Width 42 mm

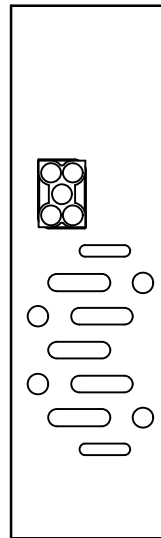

Width 52 mm

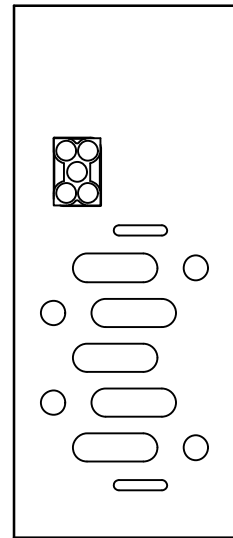

-  - Note

The illustrations shown depict a schematic representation of the pneumatic ISO port patterns.

The port patterns on the valve terminal VTSA-F do not correspond to the ISO standard.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Manifold sub-base variants with QS fitting, valve terminal VTSA | | | | | | | | | |
|---|-------------------|--------------------|-------|-------|-------|-------|---|--------------------------------------|--------------------------------------|
| Code | | Type | Width | | | | No. of valve positions (solenoid coils 1) | Working ports (2, 4) | |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | | Code M large | Code N small |
| Manifold sub-base for double solenoid valves | | | | | | | | | |
| A | | VABV-S4-2S-G18-2T2 | ■ | - | - | - | 2 (4) | QS-G ¹ / ₈ -8 | - |
| AK | | | | | | | | - | QS-G ¹ / ₈ -6 |
| B | | VABV-S4-1S-G14-2T2 | - | ■ | - | - | 2 (4) | QS-G ¹ / ₄ -10 | - |
| BK | | | | | | | | - | QS-G ¹ / ₄ -8 |
| C | | VABV-S2-1S-G38-T2 | - | - | ■ | - | 1 (2) | QS-G ³ / ₈ -12 | - |
| CK | | | | | | | | - | QS-G ³ / ₈ -10 |
| D | VABV-S2-2S-G12-T2 | - | - | - | ■ | 1 (2) | QS-G ¹ / ₂ -16 | - | |
| DK | | | | | | | - | QS-G ¹ / ₂ -12 | |
| Manifold sub-base for single solenoid valves | | | | | | | | | |
| E | | VABV-S4-2S-G18-2T1 | ■ | - | - | - | 2 (2) | QS-G ¹ / ₈ -8 | - |
| EK | | | | | | | | - | QS-G ¹ / ₈ -6 |
| F | | VABV-S4-1S-G14-2T1 | - | ■ | - | - | 2 (2) | QS-G ¹ / ₄ -10 | - |
| FK | | | | | | | | - | QS-G ¹ / ₄ -8 |
| G | | VABV-S2-1S-G38-T1 | - | - | ■ | - | 1 (1) | QS-G ³ / ₈ -12 | - |
| GK | | | | | | | | - | QS-G ³ / ₈ -10 |
| H | VABV-S2-2S-G12-T1 | - | - | - | ■ | 1 (1) | QS-G ¹ / ₂ -16 | - | |
| HK | | | | | | | - | QS-G ¹ / ₂ -12 | |

1) Value in brackets is max. number of solenoid coils that can be controlled

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Manifold sub-base variants with QS fitting, valve terminal VTSA-F | | | | | | | | | |
|---|-------------------|---------------------|-------|-------|-------|-------|---|------------------------|------------------------|
| Code | | Type | Width | | | | No. of valve positions (solenoid coils 1) | Working ports (2, 4) | |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | | Code M large | Code N small |
| Manifold sub-base for double solenoid valves | | | | | | | | | |
| A | | VABV-S4-2HS-G18-2T2 | ■ | - | - | - | 2 (4) | QS-G $\frac{1}{8}$ -8 | - |
| AK | | | | | | | | - | QS-G $\frac{1}{8}$ -6 |
| B | | VABV-S4-1HS-G14-2T2 | - | ■ | - | - | 2 (4) | QS-G $\frac{1}{4}$ -10 | - |
| BK | | | | | | | | - | QS-G $\frac{1}{4}$ -8 |
| C | | VABV-S2-1HS-G38-T2 | - | - | ■ | - | 1 (2) | QS-G $\frac{3}{8}$ -12 | - |
| CK | | | | | | | | - | QS-G $\frac{3}{8}$ -10 |
| D | VABV-S2-2S-G12-T2 | - | - | - | ■ | 1 (2) | QS-G $\frac{1}{2}$ -16 | - | |
| DK | | | | | | | - | QS-G $\frac{1}{2}$ -12 | |
| Manifold sub-base for single solenoid valves | | | | | | | | | |
| E | | VABV-S4-2HS-G18-2T1 | ■ | - | - | - | 2 (2) | QS-G $\frac{1}{8}$ -8 | - |
| EK | | | | | | | | - | QS-G $\frac{1}{8}$ -6 |
| F | | VABV-S4-1HS-G14-2T1 | - | ■ | - | - | 2 (2) | QS-G $\frac{1}{4}$ -10 | - |
| FK | | | | | | | | - | QS-G $\frac{1}{4}$ -8 |
| G | | VABV-S2-1HS-G38-T1 | - | - | ■ | - | 1 (1) | QS-G $\frac{3}{8}$ -12 | - |
| GK | | | | | | | | - | QS-G $\frac{3}{8}$ -10 |
| H | VABV-S2-2S-G12-T1 | - | - | - | ■ | 1 (1) | QS-G $\frac{1}{2}$ -16 | - | |
| HK | | | | | | | - | QS-G $\frac{1}{2}$ -12 | |

1) Value in brackets is max. number of solenoid coils that can be controlled


| 90° connection plate for working ports 2 and 4 | | | | | | | | | |
|--|--|-----------------------|-------|-------|-------|-----------------|---------|--|--|
| Code | | Type | Width | | | | Ports | Working ports (2, 4) on the 90° connection plate | |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | | | |
| P | | VABF-S4-...-A2G2-G... | ■ | - | - | - | 2 and 4 | G $\frac{1}{8}$ | |
| - | | | ■ | - | - | G $\frac{1}{4}$ | | | |
| - | | | - | ■ | - | G $\frac{3}{8}$ | | | |
| - | | | - | - | ■ | G $\frac{1}{2}$ | | | |

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

FESTO

Sub-base valve



All valves are fitted with piston spool and patented sealing system, which ensures efficient sealing, a broad operating pressure range and long service life.

Sub-base valves can be quickly replaced since the tubing connections remain on the manifold sub-base. Irrespective of the valve function

there are sub-base valves with one solenoid coil (single solenoid) or with two solenoid coils for double solenoid or double valve functions.

Reverse/vacuum operation

Select reverse operation (code Z) if you wish to operate an actuator (cylinder) with different pressures for

the forward and return stroke. Please note that the valves must then be operated via a separate pressure zone.

The reversible 3/2-way solenoid valves are also suitable for vacuum operation. Reverse operation is only

possible in pressure zones with external pilot air supply.

Note

- If a pressure zone is in reverse operation, supply pressure is connected to port 3/5 and exhausting takes place at port 1 at all valve positions in this pressure zone.
- Reversible pressure regulators cannot be selected when a pressure zone is in reverse operation.
- With reversible pressure regulators, only the valve at this position is in reverse operation.
- When using 5/3-way valves in reverse operation, the mid-position function switches from exhausted to pressurised and vice versa.

Blanking plate




Plate without valve function for reserving valve positions on a valve terminal.

Valve plates and blanking plates are attached to the manifold sub-base using screws.

Design

Valve replacement

The valves are attached to the metal manifold sub-base using two or four screws, which means that they can be

easily replaced. The mechanical robustness of the manifold sub-base guarantees efficient long-term sealing.

Extension

Vacant positions can be fitted with valves at a later date. The dimensions, mounting points and existing pneumatic installations remain unchanged during this process.

For more information and technical data on expansion, refer to the user documentation:


➔ Internet: PBE-VTSA-44

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Valve function | | | | | | | |
|----------------|----------------|------------|-------|-------|-------|-------|--|
| Terminal code | Circuit symbol | Valve code | Width | | | | Description |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | |
| VC | | T22C | ■ | ■ | ■ | ■ | 2x 2/2-way valve, single solenoid <ul style="list-style-type: none"> • Normally closed • Pneumatic spring return |
| WV | | T22CV | ■ | ■ | ■ | - | 2x 2/2-way valve, single solenoid <ul style="list-style-type: none"> • Reverse operation • Normally closed • Pneumatic spring return • Vacuum operation possible at 3 and 5 |
| N | | T32U | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Normally open • Pneumatic spring return • Operating pressure > 3 bar |
| K | | T32C | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Normally closed • Pneumatic spring return • Operating pressure > 3 bar |
| H | | T32H | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Normal position <ul style="list-style-type: none"> - 1x closed - 1x open • Pneumatic spring return • Operating pressure > 3 bar |
| P | | T32F | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Reverse operation only • Normally open • Pneumatic spring return |
| Q | | T32N | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Reverse operation only • Normally closed • Pneumatic spring return |
| R | | T32W | ■ | ■ | ■ | ■ | 2x 3/2-way valve, single solenoid <ul style="list-style-type: none"> • Reverse operation only • Normal position <ul style="list-style-type: none"> - 1x closed - 1x open • Pneumatic spring return |

 Note
A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Valve function | | | | | | | |
|----------------|----------------|------------|-------|-------|-------|-------|--|
| Terminal code | Circuit symbol | Valve code | Width | | | | Description |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | |
| M | | M52-A | ■ | ■ | ■ | ■ | 5/2-way valve, single solenoid • Reverse operation • Pneumatic spring return |
| O | | M52-M | ■ | ■ | ■ | ■ | 5/2-way valve, single solenoid • Reverse operation • Mechanical spring return |
| J | | B52 | ■ | ■ | ■ | ■ | 5/2-way valve, double solenoid |
| D | | D52 | ■ | ■ | ■ | ■ | 5/2-way valve, double solenoid • Dominant signal at port 14 on the control side |
| SO SQ SS | | M52-M | - | ■ | - | - | 5/2-way valve, single solenoid ²⁾ , as plug-in or via pilot valve with pneumatic interface to ISO 15218 See also special valve function in the separate chapter "Solenoid valve with switching position sensing" → page 140 |
| SP SN | | T52-M | - | ■ | - | - | 2x 5/2-way valve, single solenoid, with switching position sensing, pneumatically linked via two channels as special valve function "control block with safety function" → page 146 |
| B | | P53U | ■ | ■ | ■ | ■ | 5/3-way solenoid valve • Mid-position pressurised ¹⁾ • Mechanical spring return |
| G | | P53C | ■ | ■ | ■ | ■ | 5/3-way solenoid valve • Mid-position closed ¹⁾ • Mechanical spring return |
| E | | P53E | ■ | ■ | ■ | ■ | 5/3-way solenoid valve • Mid-position exhausted ¹⁾ • Mechanical spring return |

- 1) If neither solenoid coil is energised, the valve moves to its mid-position by means of a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first.
- 2) The symbol represents a valve with a proximity sensor with a switching output signal, in the illustration an N/O contact. In accordance with ISO 1219-1, this symbol applies to both N/O contacts as well as N/C contacts. The switching element function of all sensors used here is an N/C contact.

**New**

Valves with terminal code SA, SB, SD, SE for widths 18 and 26

FESTO

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components


| Valve function | | | | | | | |
|----------------|----------------|------------|-------|-------|-------|-------|--|
| Terminal code | Circuit symbol | Valve code | Width | | | | Description |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | |
| SA | | P53ED | ■ | ■ | - | - | 5/3-way solenoid valve, for special functions through default position in switching position 14 <ul style="list-style-type: none"> • Pressureless switching, self-latching loop, pneumatic operation • Mid-position exhausted, switching position 14 is retained • Mechanical spring return |
| SB | | P53AD | ■ | ■ | - | - | 5/3-way solenoid valve, for special functions through default position in switching position 14 <ul style="list-style-type: none"> • Holding, blocking a movement (mechanically) • Mid-position: port 2 pressurised, port 4 exhausted, switching position 14 is retained • Mechanical spring return |
| SD | | P53BD | ■ | ■ | - | - | 5/3-way solenoid valve, for special functions through default position in switching position 14 <ul style="list-style-type: none"> • Holding, blocking a movement (mechanically) • Mid-position: port 4 pressurised, port 2 exhausted, switching position 14 is retained • Mechanical spring return |
| SE | | P53EP | ■ | ■ | - | - | 5/3-way solenoid valve, for special functions through default position in switching position 12 <ul style="list-style-type: none"> • Pressureless switching, self-latching loop, pneumatic operation • Mid-position exhausted, switching position 12 is retained • Mechanical spring return |
| VG | | P53F | - | - | ■ | ■ | 5/3-way solenoid valve <ul style="list-style-type: none"> • Positioning • Mid-position: port 2 pressurised, port 4 closed¹⁾ • Mechanical spring return |
| VB | - | - | - | ■ | - | - | Vacuum generator with ejector pulse and adjustable air saving function (plate for 2 valve positions, sensor SDE3 with display and M12 connection) |
| L | - | - | ■ | ■ | ■ | ■ | For valve terminal only: Blanking plate for vacant valve position |

1) If neither solenoid coil is energised, the valve moves to its mid-position by means of a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

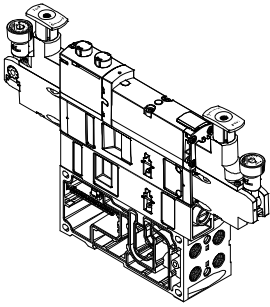

Additional function units can be added to each valve position between the sub-base (manifold sub-base) and the valve. These functions are known as vertical stacking modules and


enable special functioning or control of an individual valve position. Combinations of several valve sizes on one valve terminal are possible.



Note

Certain combinations are not recommended due to the design of the individual vertical stacking components.

Vertical stacking components

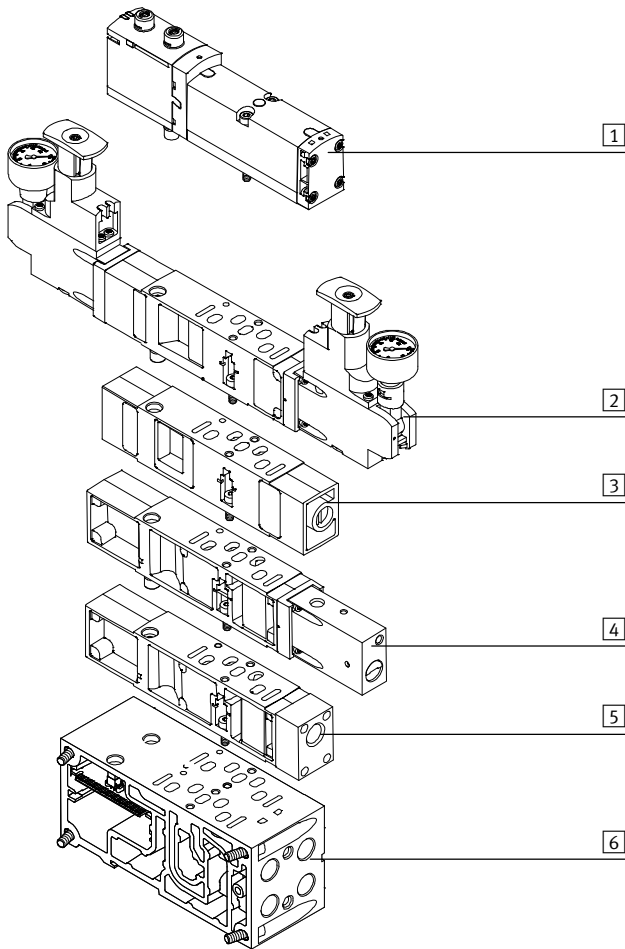

The following component sequence is recommended for valve positions with vertical stacking:


- 1 Valve VSVA
- 2 Pressure regulator plate
- 3 Flow control plate
- 4 Vertical pressure shut-off plate
- 5 Vertical supply plate
- 6 Manifold sub-base

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

Pressure regulator plate

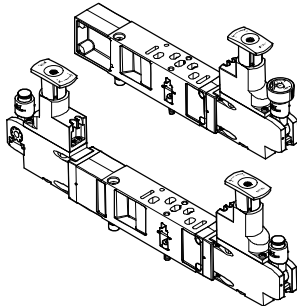

An adjustable pressure regulator can be installed between the sub-base (manifold sub-base) and the valve in order to control the force of the triggered actuator.

This pressure regulator maintains an essentially constant output pressure (secondary side) independent of pressure fluctuations (primary side) and air consumption. Also suitable for valves with symmetrical coil layout.

Standard version:

- Standard port pattern to ISO 15407-2 or ISO 5599-2
- For regulating range up to 6 bar or up to 10 bar
- Without pressure gauge (optional)
- Regulator knob with 3 positions (locked, reference position, free running)

-  - Note

With the A, B and AB pressure regulators VABF-S...-1-..., the regulated pressure should not be less than 2 bar.

Use the reversible A, B or AB pressure regulators for regulated pressures less than 2 bar.

-  - Note

Please note for repeat orders of pressure regulators in sizes 42 mm and 52 mm:
The part number imprinted on the regulator plate refers only to the standard equipment.

When reordering pressure regulators with additional features, such as a lockable rotary knob, extended design, etc., only use the VABF configurator.

➔ Internet: vabf-s2

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

Energy efficiency through dual-pressure operation or through operation with reversible pressure regulators

Energy conservation starts right from compressed air generation. It is possible to achieve an energy saving of up to 10% per 1 bar drop in pressure. Therefore, wherever possible reduce the pressure to the minimum required.

To save additional energy, you can operate valves in dual-pressure mode in a separate pressure zone.

To do this, the valves used must be operated in reverse mode, i.e. with reversed direction of flow (see also note on → page 86). In dual-pressure operation, the valves are then supplied with pressure separately via ducts 3 and 5. The air is vented via duct 1.

Requirements for dual-pressure operation:

- Exhaust ducts 3 and 5 in the pressure zone are completely separate.
- Valves are used that can be operated in reverse mode.

Advantages of dual-pressure operation:

It is possible to save energy if different pressures can be applied to one valve. The advantages are:

- Saves energy because the return stroke can be carried out using reduced force, e.g. 3 bar instead of 6 bar.
- Just one valve is required, as in the case of vacuum application with ejector pulse for example (e.g. duct 3 for vacuum switching, duct 5 for the ejector pulse).
- A reduction in compressed air consumption of up to 50% is possible if two different pressures can be applied to the valve (return stroke uses reduced pressure).


Advantages of reversible operation:

If compressed air is applied to the pressure regulator upstream of the valve (circuit diagram 2), exhausting is directly via the solenoid valve.

This has the following advantages:


- Increased exhaust capacity, exhausting is up to 50% quicker
- Lower wear on the pressure regulator
- Very finely adjustable, perfect for very low operating pressures
- No quick exhaust valves are required.
- Fast cycle times
- The pressure regulator can be adjusted independently of the valve position because operating pressure is permanently present at the pressure regulator.

Dual-pressure operation with standard controller

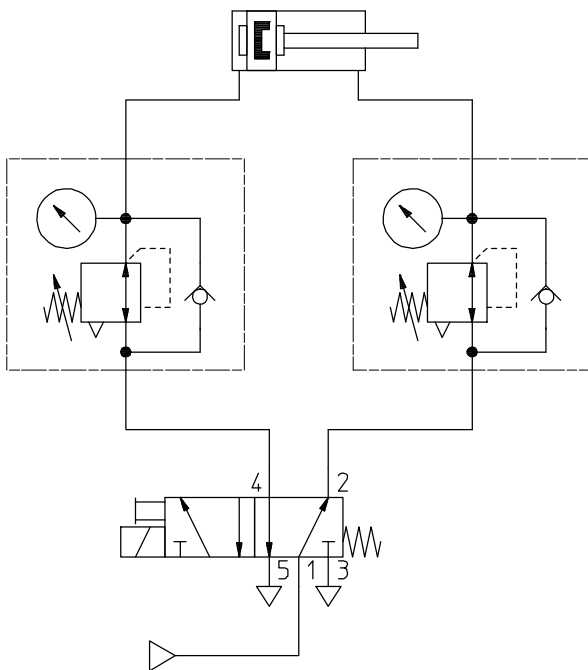

Circuit diagram 1:
Pressure is regulated downstream of the valve

Dual-pressure operation with reversible controller

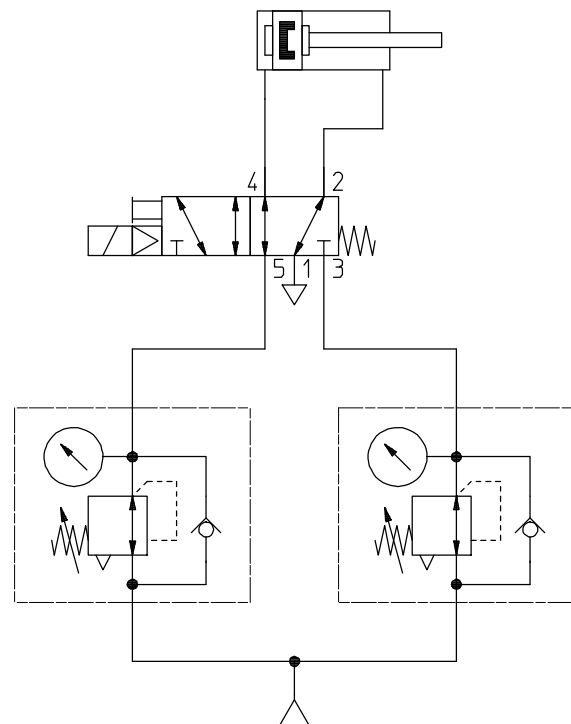


Circuit diagram 2:
Pressure is regulated upstream of the valve

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

Mode of operation of the pressure regulator plate (P regulator) for port 1; code: ZA, ZAY, ZF, ZFY

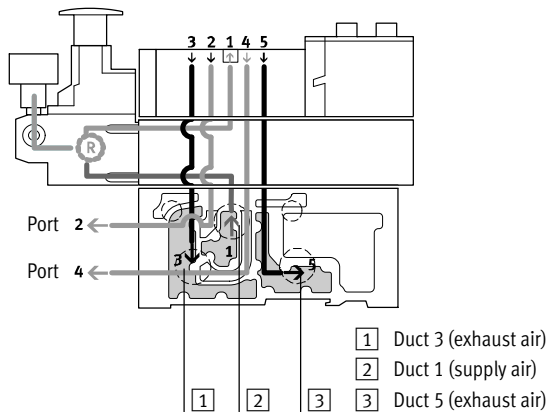

This pressure regulator regulates the pressure upstream of the valve in duct 1. Ducts 2 and 4 thus have the same regulated pressure.

During venting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5.


Advantages

- The pressure regulator is not affected by venting, since the pressure is regulated upstream of the valve.
- The pressure regulator can always be adjusted, since the pressure from the valve terminal is always present.

Application examples

- An equal working pressure is required at working ports 2 and 4. (e.g. 3 bar) than the operating pressure present at the valve terminal (e.g. 8 bar) is required.
- A lower working pressure

Mode of operation of the pressure regulator plate (AB regulator) for ports 2 and 4; code: ZD, ZDY, ZI, ZIY

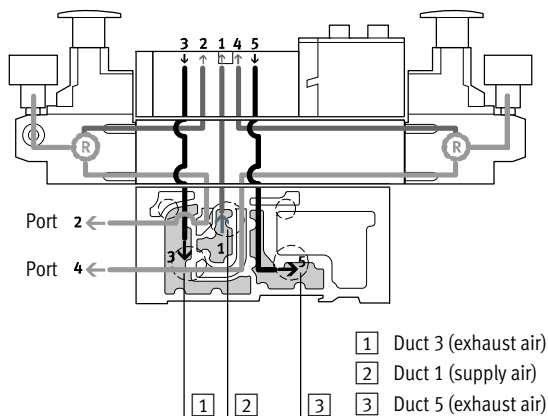

This pressure regulator regulates the pressure in ducts 2 and 4 after the pressure medium flows through the valve. During venting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5 via the pressure regulator.

Example with the following switching position:
The air flows from duct 1 of the manifold sub-base via the valve to duct 2, it is then regulated and made available at port 2 of the manifold sub-base. At the same time, venting takes place via duct 4 of the manifold sub-base, via the regulator and via the valve into duct 5 of the manifold sub-base.

Restrictions

- The pressure regulator cannot be adjusted in the exhaust position. For example, the pressure regulator for duct 4 cannot be adjusted when the valve is pressurised in the switching position from duct 1 to duct 2 and exhausted from duct 4 to duct 5.

Application examples


- Two different working pressures are required at ports 2 and 4 instead of the valve terminal operating pressure.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

Mode of operation of the pressure regulator plate (AB regulator, reversible) for ports 2 and 4, reversible; code: ZE, ZEY, ZI, ZJY

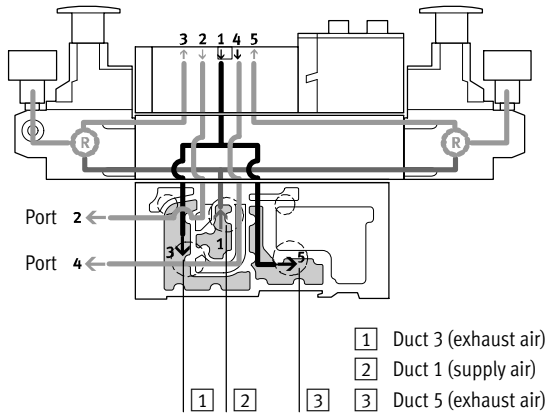

With this pressure regulator, the air (duct 1) is split and routed directly to both pressure regulators. In each case the regulated air is present in ducts 3 and 5 on the valve. The valve is thus operated in reverse mode.

This means:

- Duct 3 routes the working pressure to port 2
- Duct 5 routes the working pressure to port 4

Example with the following switching position:

The air in duct 1 is split between ducts 3 and 5 in the regulator and flows from here to the valve. In the valve, the air is routed to port 2 of the manifold sub-base. The exhaust air is simultaneously routed via duct 4 of the manifold sub-base and via the valve to regulator duct 1, where it is split between ducts 3 and 5 and then discharged via the manifold sub-base.

Application examples

- Two different pressures are required in ducts 2 and 4 instead of the valve terminal's operating pressure.
- Quick exhausting is required.
- The pressure regulator must always be adjustable.

Note

- Reversible pressure regulator plates should only be combined with valves that can be operated in reverse mode.
- Valves in valve positions with vertical pressure shut-off plates are operated with internal pilot air, even when the valve terminal is operated with external pilot air supply.
- The following combination of reversible valve terminals with vertical stacking components is not permitted:
 - Reversible pressure regulator plates
 - Flow control plates
 - Vertical pressure shut-off plates
 - Vertical supply plates

Advantages

- Fast cycle times
- 50% higher exhaust flow rate, as air is not exhausted via the pressure regulator. The load on the pressure regulator is also reduced.
- No quick exhaust valves are required.
- Operating pressure is always present at the pressure regulator, as the pressure is regulated upstream of the valve, i.e. the regulator can always be adjusted.

Disadvantages

- 2x 3/2-way solenoid valves (code N, K, H) cannot be used, as pressure is present at ports 3 and 5.
- No practical combination with a flow control plate possible.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Vertical stacking – Pressure regulator plate, variants ¹⁾ | | | | | | | | | |
|--|--|----------------------|-------|-------|-------|-------|---------------------|--------|--|
| Code | | Type | Width | | | | Regulating range to | | Description |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | 6 bar | 10 bar | |
| Pressure regulator plate for port 1 (P regulator) | | | | | | | | | |
| ZA | | VABF-S...-R1C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Regulates the operating pressure in duct 1 upstream of the solenoid directional control valve |
| ZAY ²⁾ | | VABF-S...-R1C2-C-10E | ■ | ■ | ■ | ■ | – | ■ | |
| ZF | | VABF-S...-R1C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| ZFY ²⁾ | | VABF-S...-R1C2-C-6E | ■ | ■ | ■ | ■ | ■ | – | |
| Pressure regulator plate for port 2 (B regulator) | | | | | | | | | |
| ZC | | VABF-S...-R2C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Regulates the operating pressure in duct 2 downstream of the solenoid directional control valve |
| ZCY ²⁾ | | VABF-S...-R2C2-C-10E | ■ | ■ | ■ | ■ | – | ■ | |
| ZH | | VABF-S...-R2C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| ZHY ²⁾ | | VABF-S...-R2C2-C-6E | ■ | ■ | ■ | ■ | ■ | – | |
| Pressure regulator plate for port 4 (A regulator) | | | | | | | | | |
| ZB ²⁾ | | VABF-S...-R3C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Regulates the operating pressure in duct 4 downstream of the solenoid directional control valve |
| ZG ²⁾ | | VABF-S...-R3C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| Pressure regulator plate for ports 2 and 4 (AB regulator) | | | | | | | | | |
| ZD | | VABF-S...-R4C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Regulates the working pressure in ducts 2 and 4 downstream of the solenoid directional control valve |
| ZDY ²⁾ | | VABF-S...-R4C2-C-10E | ■ | ■ | ■ | ■ | – | ■ | |
| ZI | | VABF-S...-R4C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | - - Note These pressure regulator plates cannot be combined with reversible 2x 3/2-way solenoid valves (code P, Q, R). |
| ZIY ²⁾ | | VABF-S...-R4C2-C-6E | ■ | ■ | ■ | ■ | ■ | – | |

1) Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2

2) Also suitable for valves with symmetrical coil layout

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Vertical stacking – Pressure regulator plate, reversible, variants ¹⁾ | | | | | | | | | |
|--|------|----------------------|-------|-------|-------|---------------------|--------|-------------|--|
| Code | Type | Width | | | | Regulating range to | | Description | |
| | | 18 mm | 26 mm | 42 mm | 52 mm | 6 bar | 10 bar | | |
| Pressure regulator plate for port 2, reversible (B regulator) | | | | | | | | | |
| ZL | | VABF-S...-R6C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Reversible pressure regulator for port 2 |
| ZLY ²⁾ | | VABF-S...-R6C2-C-10E | ■ | ■ | ■ | ■ | – | ■ | |
| ZN | | VABF-S...-R6C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| ZNY ²⁾ | | VABF-S...-R6C2-C-6E | ■ | ■ | ■ | ■ | ■ | – | |
| Pressure regulator plate for port 4, reversible (A regulator) | | | | | | | | | |
| ZK ²⁾ | | VABF-S...-R7C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | Reversible pressure regulator for port 4 |
| ZM ²⁾ | | VABF-S...-R7C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| Pressure regulator plate for ports 2 and 4, reversible (AB regulator) | | | | | | | | | |
| ZE | | VABF-S...-R5C2-C-10 | ■ | ■ | ■ | ■ | – | ■ | <ul style="list-style-type: none"> • Reversible pressure regulator for ports 2 and 4 • Pressure regulation upstream of the solenoid directional control valve • Routes the operating pressure from duct 1 to ducts 3 and 5 • Routes the exhaust air from duct 1 to ducts 3 and 5 |
| ZEY ²⁾ | | VABF-S...-R5C2-C-10E | ■ | ■ | ■ | ■ | – | ■ | |
| ZJ | | VABF-S...-R5C2-C-6 | ■ | ■ | ■ | ■ | ■ | – | |
| ZJY ²⁾ | | VABF-S...-R5C2-C-6E | ■ | ■ | ■ | ■ | ■ | – | |

1) Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2

2) Also suitable for valves with symmetrical coil layout

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking – Pressure regulator plate type codes

| | | | | | | | | | | | | | | |
|-------------------------------------|---|------|---|----|---|---|----|----|---|---|---|---|----|---|
| | | VABF | - | S2 | - | 1 | R1 | C2 | - | C | - | 6 | L1 | E |
| Valve series | | | | | | | | | | | | | | |
| VABF | Regulator plate | | | | | | | | | | | | | |
| Allocation | | | | | | | | | | | | | | |
| S2 | ISO 5599-2 ¹⁾ | | | | | | | | | | | | | |
| S4 | ISO 15407-2 | | | | | | | | | | | | | |
| Valve size | | | | | | | | | | | | | | |
| 1 | 26 mm (ISO 15407-2, size 01) | | | | | | | | | | | | | |
| 2 | 18 mm (ISO 15407-2, size 02) | | | | | | | | | | | | | |
| 1 | 42 mm (ISO 5599-2, size ISO 1) | | | | | | | | | | | | | |
| 2 | 52 mm (ISO 5599-2, size ISO 2) | | | | | | | | | | | | | |
| Function plate | | | | | | | | | | | | | | |
| R1 | Pressure regulator, port 1 | | | | | | | | | | | | | |
| R2 | Pressure regulator, port 2 | | | | | | | | | | | | | |
| R3 | Pressure regulator, port 4 | | | | | | | | | | | | | |
| R4 | Pressure regulator, ports 2 and 4 | | | | | | | | | | | | | |
| R5 | Pressure regulator, ports 2 and 4, reversible | | | | | | | | | | | | | |
| R6 | Pressure regulator, port 2, reversible | | | | | | | | | | | | | |
| R7 | Pressure regulator, port 4, reversible | | | | | | | | | | | | | |
| Pressure indicator | | | | | | | | | | | | | | |
| C2 | Sealed | | | | | | | | | | | | | |
| C3 | Pressure gauge [bar] ¹⁾ | | | | | | | | | | | | | |
| C4 | Pressure gauge [MPa] ¹⁾ | | | | | | | | | | | | | |
| C6 | Pressure gauge [psi] ¹⁾ | | | | | | | | | | | | | |
| Pneumatic connection | | | | | | | | | | | | | | |
| C | Sealed | | | | | | | | | | | | | |
| Pressure range | | | | | | | | | | | | | | |
| 6 | Up to 6 bar | | | | | | | | | | | | | |
| 10 | Up to 10 bar | | | | | | | | | | | | | |
| Control element²⁾ | | | | | | | | | | | | | | |
| - | Short (standard button) | | | | | | | | | | | | | |
| L1 | Long | | | | | | | | | | | | | |
| L2 | Long, lockable | | | | | | | | | | | | | |
| K2 | Short, lockable | | | | | | | | | | | | | |
| K3 | With integrated lock | | | | | | | | | | | | | |
| Optional | | | | | | | | | | | | | | |
| E | Extended design ¹⁾ | | | | | | | | | | | | | |

1) These functions are available via the pressure regulator configurator VABF-S2 for width 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) only
Alternatively they can be selected for all four sizes in the valve terminal configurator or via their own order numbers in the chapter Accessories on page 128


2) All variants are only possible with VABF-S2

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical stacking

Flow control plate



The flow control plate is equipped with two flow control valves on which the exhaust air flow rate at exhaust ports 3 or 5 can be adjusted. This enables the movement of the drive to be


initiated and the desired speed to be set on the valve terminal using the manual override.
Ducts 3 and 5 can be adjusted independently of each other.

Note

On reversible valve terminals, the air flow is controlled in ducts 3 and 5 upstream of the valve.

| Code | Type | Width | | | | Description |
|------|------------------|-------|-------|-------|-------|--|
| | | 18 mm | 26 mm | 42 mm | 52 mm | |
| X | VABF-S4...F1B1-C | ■ | ■ | ■ | ■ | <ul style="list-style-type: none"> Restricts the exhaust air downstream of the valve in ducts 3 and 5 |

Vertical pressure shut-off plate

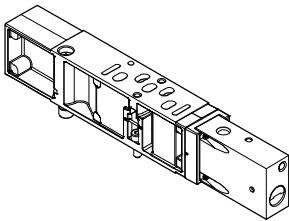

The vertical pressure shut-off plate is equipped with a switch via which the compressed air supply can be shut off. This enables a solenoid directional control valve or subsequent vertical stacking plate to be replaced without switching off the overall air supply. If the control chain has a redundant connection, the cycle can continue in

the case of a cyclical control system. Following activation of the shut-off, the exhaust air/return air from the actuated valve is discharged. This takes place via an M5 threaded connection or via duct 3 in the case of width 18 and 26 mm, and via duct 3 in the case of width 42 and 52 mm.

Note

The operating pressure of the valve terminal must lie within the range of the required pilot pressure (i.e. min. 3 bar). When using the end plate with pilot air selector, only the switching position with the code W and U can be used.

| Code | Type | Width | | | | Description |
|------|------------------|-------|-------|-------|-------|---|
| | | 18 mm | 26 mm | 42 mm | 52 mm | |
| ZT | VABF-S4...L1D1-C | ■ | ■ | - | - | <ul style="list-style-type: none"> 3/2-way solenoid valve for shutting off the operating pressure at the valve position Blocks ducts 1 and 14 for the valve position |
| | VABF-S2...L1D1-C | - | - | ■ | ■ | <ul style="list-style-type: none"> Supplies the valve position with internal pilot air Pressure separation at the valve assembly |
| ZS | VABF-S...L1D2-C | ■ | ■ | - | - | <ul style="list-style-type: none"> 3/2-way solenoid valve for shutting off the operating pressure at the valve position Blocks ducts 1 and 14 for the valve position Supplies the valve position with internal pilot air Key-operated pressure separation at the valve assembly |

Note


The vertical pressure shut-off plates VABF... are provided only in combination with VSVA...T1L solenoid valves

from Festo. In the vertical pressure shut-off plate only ducts 1 and 14, and not duct 12, are blocked.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Vertical supply plate



This plate enables a valve to be supplied with individual operating pressure independently of the operating pressure of the valve terminal.

As additional pressure supply for a valve. To supply an additional pressure zone.

| Code | Type | Width | | | | Description | |
|------|---------------------|-------|-------|-------|-------|-------------|--|
| | | 26 mm | 18 mm | 42 mm | 52 mm | | |
| ZU | VABF-S-...P1A3-... | | ■ | ■ | ■ | ■ | <ul style="list-style-type: none"> Plate with port 11 for supplying individual operating pressure to a valve position, duct 1 |
| ZV | VABF-S-...P1A14-... | | ■ | ■ | ■ | ■ | <ul style="list-style-type: none"> Plate with port 11 for supplying individual operating pressure to a valve position, ducts 1 and 14 |


Valve terminal VTSA/VTSA-F

Key features – Pneumatic components




Compressed air supply and exhausting

Right-hand end plate, internal pilot air supply




- Code V


Right-hand end plate, external pilot air supply



- Code X




- Code V1, V3




- Code X1, X3

Right-hand end plate, size ISO 3, internal pilot air supply




- Code V2, for width 65 mm

Right-hand end plate, size ISO 3, external pilot air supply



- Code X2, for width 65 mm

Right-hand end plate with pilot air selector



- Code Z, Y, W, U
- Code Z: selector position 1, external pilot air supply
- Code Y: selector position 2, internal pilot air supply


- Code W: selector position 3, external pilot air supply (ducted)

- Code U: selector position 4, internal pilot air supply (ducted)


The valve terminal VTSA/VTSA-F can be supplied with compressed air at one or more points. This is a reliable way of ensuring that all functional components will always offer good performance, even with large-scale

extensions. The valve terminal is generally supplied via supply plates (max. 16 per valve terminal) and/or via the right-hand end plate. When using valves with a width of 65 mm, the compressed air can also be

supplied and exhausted using the adapter plate VABA-.... Venting takes place via silencers or ports for ducted exhaust air on the supply plates and/or on the right-hand end plate.


 Note
Compressed air exhaust and exhaust for size ISO 3 is described in a separate chapter on adaptation to width 65 mm (internal/external pilot air is regulated via MUH plate (solenoid valve)).

Supply plates, exhaust port 3/5 separated



- Code K

Supply plates, exhaust port 3/5 common



- Code L

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Additional compressed air supply/duct separation

Additional supply plates can be used to ensure the compressed air supply for larger valve terminals or to create additional pressure zones.

These can be selected at any point upstream or downstream of the manifold sub-bases.

Supply plates contain the ports:

- Compressed air supply (1)
- Exhaust port (3/5) common or separated

Depending on your order, the exhaust air ducts are either ducted or exhausted via silencers.

VTSA/VTSA-F with ducted exhaust air:





With ducted exhaust air, venting can be via a supply plate or a right-hand end plate (code V or X).

If duct separation is required, there are three different options:

- Duct separation 1, 3, 5: code S
- Duct separation 1: code T
- Duct separation 3, 5: code R

If a combination of duct separation (S, T or R) and one or two supply plates is required, the following variants can be selected:

- Supply plate with duct separation on the left-hand side: code SU, TU, RU
- Supply plate with duct separation on the right-hand side: code US, UT, UR
- 2 supply plates with intermediate duct separation: code USU, UTU, URU
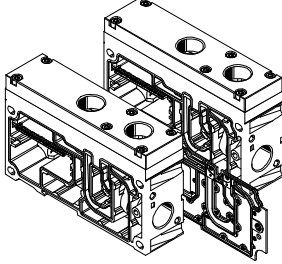
| Supply plates | | | | | | | |
|-------------------|---|---|-------|-------|-------|-------|---|
| Code | Image | Type | Width | | | | Description |
| | | | 18 mm | 26 mm | 42 mm | 52 mm | |
| U |  | <ul style="list-style-type: none"> • Exhaust port 3/5 common VABF-S6-10-P1A7-G12 • Exhaust port 3/5 separated VABF-S6-10-P1A6-G12 | ■ | ■ | ■ | ■ | Supply plate without duct separation (no R, S or T selected) |
| SU TU RU |  | | ■ | ■ | ■ | ■ | Supply plate with duct separation on left, if R, S or T selected |
| US UT UR |  | | ■ | ■ | ■ | ■ | Supply plate with duct separation on right, if R, S or T selected |
| USU UTU URU |  | | ■ | ■ | ■ | ■ | 2 supply plates with duct separation in centre, if R, S or T selected |

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



Right-hand end plate

Right-hand end plates with different port sizes are available depending on the air rate required.

With the following right-hand end plates, the outlet direction of the ports is aligned with the horizontal stacking direction.

Right-hand end plates with pilot air supply/pilot exhaust air


- Internal pilot air supply: code V, V1, V2 and V3 (ducts 1 and 14 are connected)
- External pilot air supply: code X, X1, X2 and X3, as well as XP1, XP2, XP3 and XS

For end plates with pilot air selector, the outlet direction of the ports is to the front of the valve terminal. This means that all the ports on the valve terminal can be combined in one outlet direction.

The special feature of the end plates with pilot air selector is the selector switch itself, which has four settings for different pilot air supply/pilot exhaust air.

End plates with pilot air selector switch set at the factory for:

- External pilot air supply: selector position 1 (code Z)
- Internal pilot air supply: selector position 2 (code Y)
- External pilot air supply, ducted pilot exhaust air: selector position 3 (code W)
- Internal pilot air supply, ducted pilot exhaust air: selector position 4 (code U)

 Note

- The end plate with pilot air selector must be used in combination with a supply plate.
- The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.
- Ducted pilot exhaust air via port 12 is only possible with rotated seals on the valve.

Right-hand end plate, variants

| Code | Blanking plug in duct | Pilot air supply | Ducted pilot exhaust air ¹⁾ Position of seal on solenoid valve ("ISO" is visible) | Connecting thread | |
|-------------------|-----------------------|---|--|-------------------|--------|
| | | | | 1, 3, 5 | 12, 14 |
| v | 14 | Internal | – | G1/2 | G1/4 |
| V1 | 14 | | – | G3/4 | G1/4 |
| V2 | 14 | | – | G1 | G1/8 |
| V3 | 14 | | ■ | G3/4 | G1/4 |
| X | – | External | – | G1/2 | G1/4 |
| X1 | – | | – | G3/4 | G1/4 |
| X2 | – | | – | G1 | G1/8 |
| X3 | – | | ■ | G3/4 | G1/4 |
| XP1 ²⁾ | 1 | External, via soft-start valve ("gradual pressure build-up") | – | G1/2 | G1/4 |
| XP2 ³⁾ | 1, 14 | | – | G1/2 | G1/4 |
| XP3 ³⁾ | 1, 3, 5, 14 | | – | G1/2 | G1/4 |
| XS ⁴⁾ | 14 | External, via pilot air switching valve ("switchable pilot air") | – | G1/2 | G1/4 |

1) Pilot exhaust air is ducted on the end plate via port duct 12 and vented (done by turning the seal on the solenoid valve to position "ISO")

2) Not possible in combination with soft-start valve code PQ, PP, PO (with internal pilot air supply)

3) Not possible in combination with soft-start valve code PN, PM, PK (with external pilot air supply)

4) Only possible in combination with pilot air switching valve code SS with intermediate plate code ZO

Right-hand end plate with pilot air selector

| Code | Pilot air supply | Selector position | Ducted pilot exhaust air ¹⁾ Position of seal on solenoid valve ("ISO" is visible) | Connecting thread 12, 14 |
|------|-------------------|-------------------|--|--------------------------|
| Z | External | 1 | – | G1/4 |
| Y | Internal | 2 | – | G1/4 |
| W | External (ducted) | 3 | ■ | G1/4 |
| u | Internal (ducted) | 4 | ■ | G1/4 |

1) Pilot exhaust air is ducted on the end plate via port duct 12 and vented (done by turning the seal on the solenoid valve to position "ISO")

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Right-hand end plate | | | |
|--|--|-------------|--|
| Code | Type of compressed air supply and pilot air supply | Description | |
| Right-hand end plate (symbolic representation) | | | |
| V V1 V3 V2 (ISO3) | | | <p>Internal pilot air supply</p> <ul style="list-style-type: none"> • Pilot air supply is branched internally from port 1 • Port 14 is sealed • Exhaust air via ports 3 and 5 • For operating pressure in the range 3 ... 10 bar • Pilot exhaust air via port 12¹⁾ • V1 cannot be selected in combination with a soft-start valve in the last pressure zone |
| X X1 x3 X2 (ISO3) | | | <p>External pilot air supply</p> <ul style="list-style-type: none"> • Pilot air supply between 2 and 10 bar is connected at port 14 • Exhaust air via ports 3 and 5 • For operating pressure in the range -0.9 ... 10 bar (suitable for vacuum) • Pilot exhaust air via port 12¹⁾ • X1 cannot be selected in combination with a soft-start valve in the last pressure zone |
| XP1 | | | <p>External pilot air supply, pressure supply via soft-start valve²⁾</p> <ul style="list-style-type: none"> • Port 1 is sealed with a blanking plug • Exhaust air via ports 3 and 5 • Pilot exhaust air via port 12¹⁾ |
| XP2 | | | <p>External pilot air supply, pressure supply via soft-start valve²⁾</p> <ul style="list-style-type: none"> • Internal pilot air supply 14 via soft-start valve • Ports 1 and 14 are sealed • Exhaust air via ports 3 and 5 • Pilot exhaust air via port 12¹⁾ |
| XP3 | | | <p>External pilot air supply, pressure supply via soft-start valve²⁾</p> <ul style="list-style-type: none"> • Internal pilot air supply 14 via soft-start valve • Ports 1, 3, 5 and 14 are sealed • Pilot exhaust air via port 12¹⁾ |
| XS | | | <p>External pilot air supply via pilot air switching valve³⁾</p> <ul style="list-style-type: none"> • Internal pilot air supply 14 via pilot air switching valve • Port 14 is sealed • Exhaust air via ports 3 and 5 • Pilot exhaust air via port 12¹⁾ |

- 1) Ducted pilot exhaust air is only possible with rotated seals on the valve
- 2) Application with XP1, XP2, XP3 and soft-start valve in combination with valves of width 52 mm: please note the maximum flow rate of the soft-start valve in this pressure zone
- 3) Application with XS and pilot air switching valve in combination with intermediate plate

- - Note









The key features, valves and functions of width 65 mm are described separately in the chapter

“Adaptation to width 65 mm, ISO size 3 (technology type 04)”
➔ Page 173.

Valve terminal VTSA/VTSA-F


Key features – Pneumatic components



| Right-hand end plate | | |
|-----------------------------------|---|--|
| Code ¹⁾ | Type of compressed air supply and pilot air supply | Description |
| End plate with pilot air selector | | |
| Z (1) |   | <p>External pilot air supply</p> <ul style="list-style-type: none"> • Pilot air supply is connected at port 14 • Port 12 is sealed with a blanking plug • Ports 12 and 14 are internally connected • Pilot exhaust air unducted via valve housing |
| Y (2) |   | <p>Internal pilot air supply</p> <ul style="list-style-type: none"> • Pilot air supply is branched internally from port 1 • Ports 1, 12 and 14 are internally connected • Ports 12 and 14 are sealed with blanking plugs • Pilot exhaust air unducted via valve housing |
| W (3) |   | <p>External pilot air supply, ducted pilot exhaust air</p> <ul style="list-style-type: none"> • Pilot air supply is connected at port 14 • Pilot exhaust air via port 12²⁾ • Cannot be selected in combination with a soft-start valve in the last pressure zone |
| U (4) |   | <p>Internal pilot air supply, ducted pilot exhaust air</p> <ul style="list-style-type: none"> • Pilot air supply is branched internally from port 1 • Ports 1 and 14 are internally connected • Port 14 is sealed with a blanking plug • Pilot exhaust air via port 12²⁾ • Cannot be selected in combination with a soft-start valve in the last pressure zone |

1) Selector setting in brackets

2) Ducted pilot exhaust air is only possible with rotated seals on the valve (pilot exhaust air 82/84 including venting air for valves)

-  - Note

The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components



| Configuration of all pneumatic threaded connections | | | | | | |
|---|--|-------------|---------|---|---|---|
| Code | | Port (duct) | Name | Code M Push-in connector, large | Code N Push-in connector, small | |
| Right-hand end plate | | | | | | |
| V | | | 1 | Push-in fitting | QS-G $\frac{1}{2}$ -16 | QS-G $\frac{1}{2}$ -12 |
| | | | 3 and 5 | Silencer or Push-in fitting | U- $\frac{1}{2}$ -B or QS-G $\frac{1}{2}$ -16 | U- $\frac{1}{2}$ -B or QS-G $\frac{1}{2}$ -12 |
| | | | 12 | Silencer or Push-in fitting | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -10 | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -8 |
| | | | 14 | Plug | B- $\frac{1}{4}$ | B- $\frac{1}{4}$ |
| x | | | 1 | Push-in fitting | QS-G $\frac{1}{2}$ -16 | QS-G $\frac{1}{2}$ -12 |
| | | | 3 and 5 | Silencer or Push-in fitting | U- $\frac{1}{2}$ -B or QS-G $\frac{1}{2}$ -16 | U- $\frac{1}{2}$ -B or QS-G $\frac{1}{2}$ -12 |
| | | | 12 | Silencer or Push-in fitting | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -10 | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -8 |
| | | | 14 | Push-in fitting | QS-G $\frac{1}{4}$ -10 | QS-G $\frac{1}{4}$ -8 |
| V1 V3 | | | 1 | Female hose connector | N- $\frac{3}{4}$ -P-19 ¹⁾ | – |
| | | | 3 and 5 | Silencer or Female hose connector | U- $\frac{3}{4}$ -B or N- $\frac{3}{4}$ -P-19 ¹⁾ | – |
| | | | 12 | Silencer or Push-in fitting | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -12 | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -10 |
| | | | 14 | Plug | B- $\frac{1}{4}$ | B- $\frac{1}{4}$ |
| X1 X3 | | | 1 | Female hose connector | N- $\frac{3}{4}$ -P-19 ¹⁾ | – |
| | | | 3 and 5 | Silencer or Female hose connector | U- $\frac{3}{4}$ -B or N- $\frac{3}{4}$ -P-19 ¹⁾ | – |
| | | | 12 | Silencer or Push-in fitting | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -12 | U- $\frac{1}{4}$ or QS-G $\frac{1}{4}$ -10 |
| | | | 14 | Push-in fitting | QS-G $\frac{1}{4}$ -12 | QS-G $\frac{1}{4}$ -10 |

1) For tubing with internal diameter 19 mm. Use tubing clips to DIN 3017

Note

The key features, valves and functions of width 65 mm are described separately in the chapter "Adaptation to width

65 mm, ISO size 3 (technology type 04)"
→ Page 173.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components


| Configuration of all pneumatic threaded connections | | | | | | |
|---|--|--|-------------|-----------------------------|------------------------------------|------------------------------------|
| Code ¹⁾ | | | Port (duct) | Name | Code M Push-in connector, large | Code N Push-in connector, small |
| End plate with pilot air selector | | | | | | |
| Z (1) | | | 12 | Blanking plug | B-1/4 | B-1/4 |
| | | | 14 | Push-in fitting | QS-G1/4-10 | QS-G1/4-8 |
| Y (2) | | | 12 | Blanking plug | B-1/4 | B-1/4 |
| | | | 14 | Blanking plug | B-1/4 | B-1/4 |
| W (3) | | | 12 | Silencer or Push-in fitting | U-1/4 or QS-G1/4-10 | U-1/4 or QS-G1/4-8 |
| | | | 14 | Push-in fitting | QS-G1/4-10 | QS-G1/4-8 |
| U (4) | | | 12 | Silencer or Push-in fitting | U-1/4 or QS-G1/4-10 | U-1/4 or QS-G1/4-8 |
| | | | 14 | Blanking plug | B-1/4 | B-1/4 |

1) Selector setting in brackets

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components

Handling of the seals with ducted/unducted pilot exhaust air

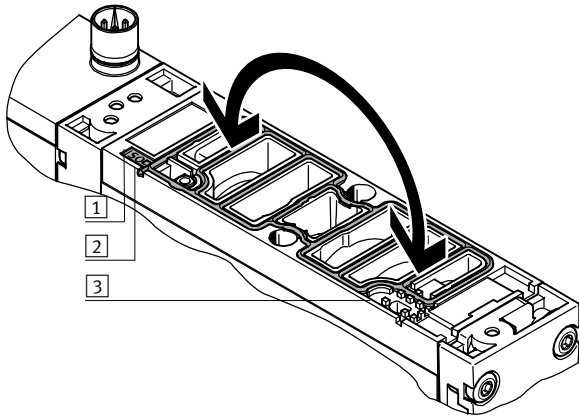

Unducted pilot exhaust air:

- The seal is visible in the inspection window on control side 14.
- The "ISO" mark is visible on the designation label on the seal surface.

Ducted pilot exhaust air:

- The seal is visible in the inspection window on control side 12.
- The "ISO" mark is visible on the designation label on the seal surface.

- 1 Designation label
- 2 Inspection window on control side 14 ("ISO" is visible)
- 3 Inspection window on control side 12 ("ISO" is visible)

Pilot air supply

The port for the pneumatic supply is located on the supply plates or the right-hand end plate.

The ports differ for the following types of pilot air supply:

- Internal
- External



Note

If a gradual pressure build-up is required in the system by means of a soft-start valve, then external pilot air should be selected whereby the

pilot pressure is already applied at the point of switch-on.

Internal pilot air supply

Internal pilot air supply can be selected if the working pressure is between 3 and 10 bar.

In this case the pilot air supply is branched from the compressed air supply 1 using an internal connection. Port 14 on the right-hand end plate is sealed with a blanking plug.

External pilot air supply

If the supply pressure is less than 3 bar, you must operate your valve terminal VTSA/VTSA-F using external pilot air supply.

The pilot air supply is then supplied via port 14 on the right-hand end plate. This is the case even if the valve terminal is operated with different pressure zones.



Note

When using valves with a width of 65 mm, ISO size 3, the internal/external pilot air supply for the valves with a width of 18 ... 52 mm is provided via the adapter plate VABA-....

The external pilot air supply for the valves with a width of 65 mm is provided via the right-hand end plate IEPR

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components




Creating pressure zones and separating exhaust air

The valve terminal VTSA/VTSA-F offers a number of options for creating pressure zones if different working pressures are required. Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by means of appropriate duct separation.

Compressed air is supplied and exhausting via a supply plate. The position of the supply plates and duct separations can be freely selected for VTSA/VTSA-F.

Duct separations are integrated ex-works as per your order. Duct separations can be distinguished by their coding, even when the valve terminal is assembled.

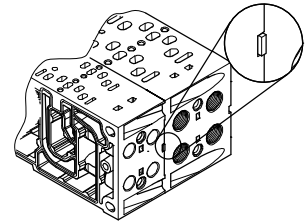


| Creating pressure zones | | | | | | | |
|-------------------------|----------------------|--------|-------|-------|-------|-------|----------------------------|
| Code | Separating seal | | Width | | | | Description |
| | Illustrated examples | Coding | 18 mm | 26 mm | 42 mm | 52 mm | |
| T | | | ■ | ■ | ■ | ■ | Duct 1 separated |
| S | | | ■ | ■ | ■ | ■ | Ducts 1, 3 and 5 separated |
| R | | | ■ | ■ | ■ | ■ | Ducts 3 and 5 separated |

Examples: Compressed air supply and pilot air supply, right-hand end plate

Internal pilot air supply, silencer/ducted exhaust air

Right-hand end plate: code V and V1

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply. Port 14 on the right-hand end plate is tightly sealed. The air is exhausted via the silencer at exhaust port 3/5. Duct separations can optionally be used to create pressure zones.

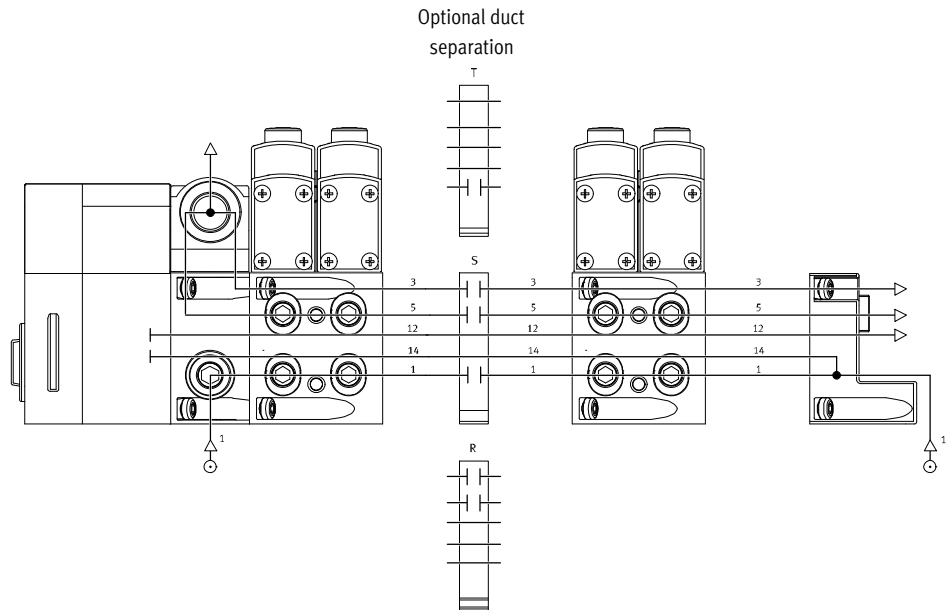

Valve terminal VTSA/VTSA-F


Key features – Pneumatic components – Compressed air supply and pressure zones, examples

Example: Compressed air supply and pilot air supply, right-hand end plate

External pilot air supply, silencer/ducted exhaust air

Right-hand end plate: code X and X1

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply. Port 14 on the right-hand end plate is equipped with a fitting for this. The air is exhausted via the silencer at exhaust port 3/5. Duct separations can optionally be used to create pressure zones.

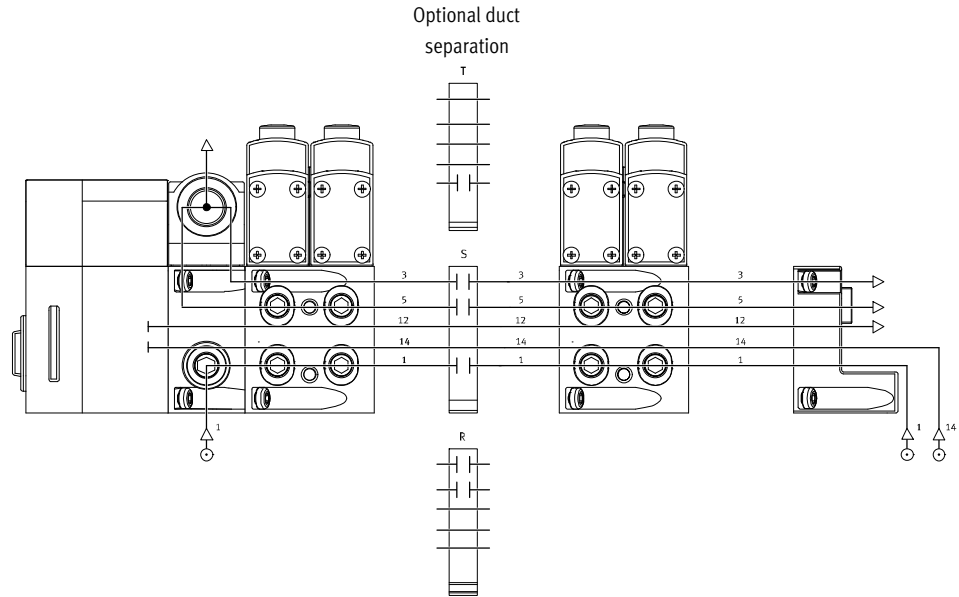


Example: Compressed air supply and pilot air supply via end plate with pilot air selector

Internal pilot air supply, ducted exhaust air/silencer

Right-hand end plate: code U

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply. Port 14 on the right-hand end plate is tightly sealed. At exhaust port 3/5 the air is ducted or discharged via the silencer. The selector switch on the pilot air selector is in position 4. Duct separations can optionally be used to create pressure zones.

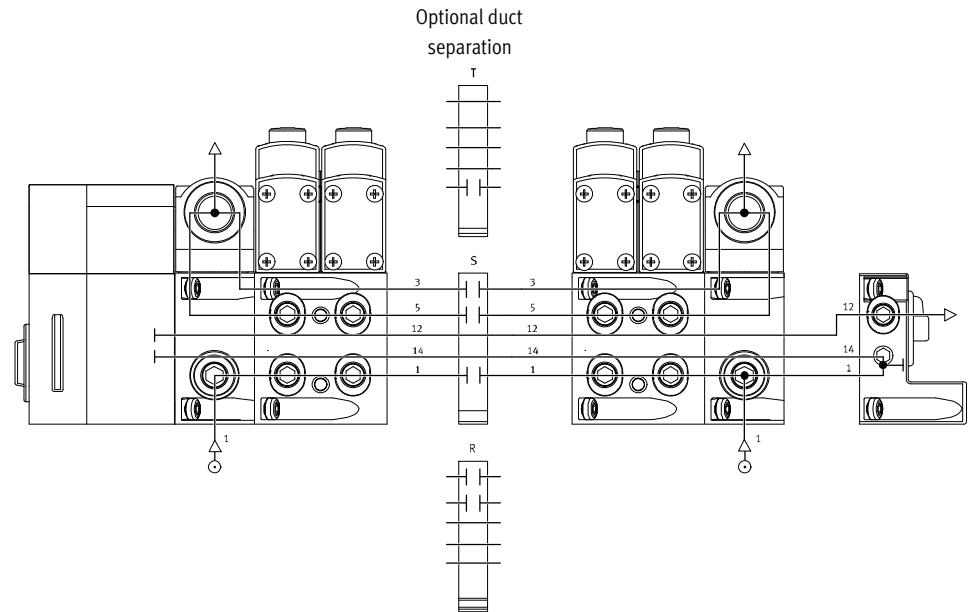

Valve terminal VTSA/VTSA-F


Key features – Pneumatic components – Compressed air supply and pressure zones, examples

Example: Compressed air supply and pilot air supply via end plate with pilot air selector

External pilot air supply, ducted exhaust air/silencer

Right-hand end plate: code Z


The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply. Port 14 on the right-hand end plate is equipped with a fitting for this. Port 12 is sealed with a blanking plug since it is internally connected with port 14. At exhaust port 3/5 the air is ducted or discharged via the silencer. The selector switch on the pilot air selector is in position 1. Duct separations can optionally be used to create pressure zones.

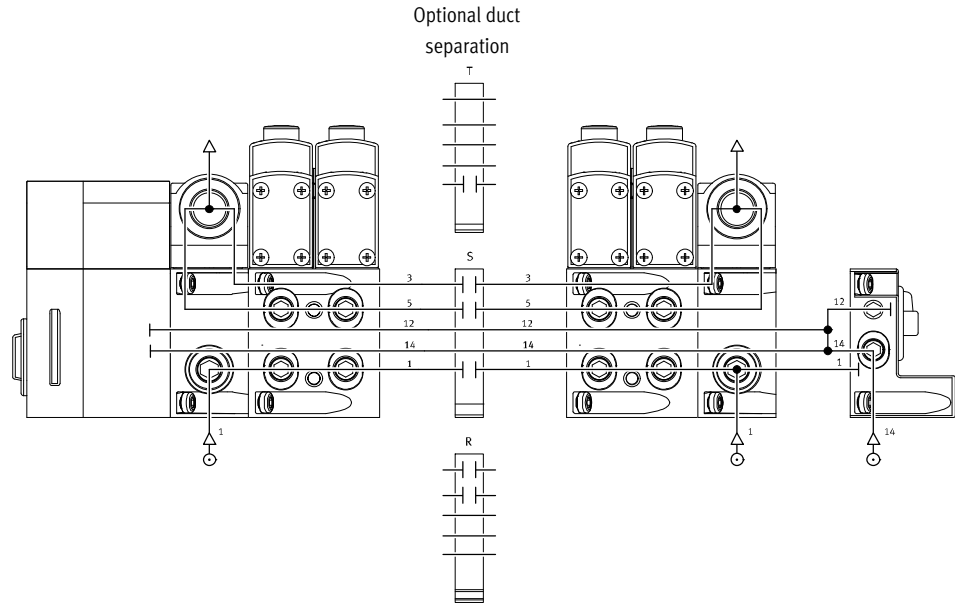

Example: Creating pressure zones

VTSA/VTSA-F with CPX terminal

With the VTSA/VTSA-F, up to 16 pressure zones can be created (up to 32 pressure zones if only size 1, ISO 5599-2, is fitted). The diagram shows an example of the configuration and connection of three pressure zones using duct separations – with internal pilot air supply.

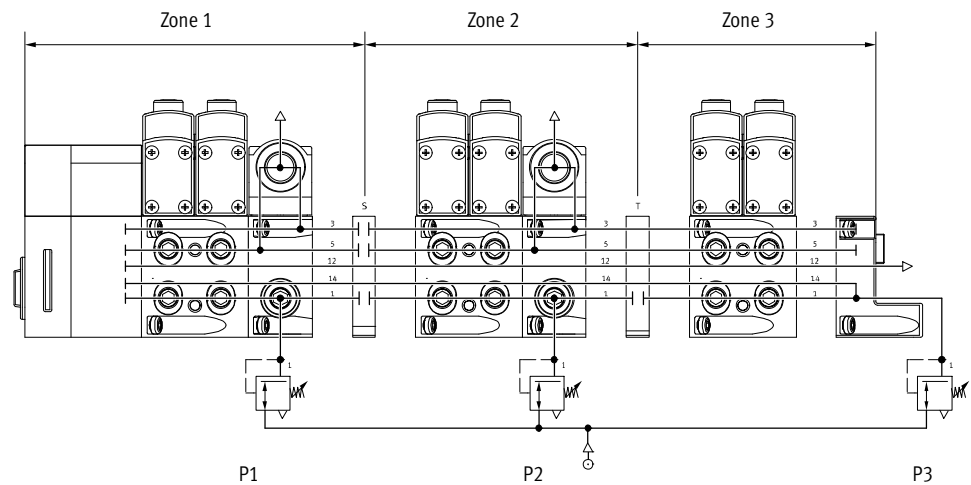

- - Note
 Examples with pressure zones and soft-start valve are described separately in the chapter "Soft-start valve" → page 163.

Valve terminal VTSA/VTSA-F

Key features – Assembly

Valve terminal assembly

Sturdy valve terminal mounting thanks to:

- Through-holes for wall mounting
- Additional mounting brackets
- H-rail mounting (horizontal permitted mounting position)

 Note


Further information on installing the valve terminal, arranged by valve terminal configuration, can be found

on the catalogue DVD or online.

➔ Internet: 2D/3D CAD

➔ www.festo.com/sp

Wall mounting, general

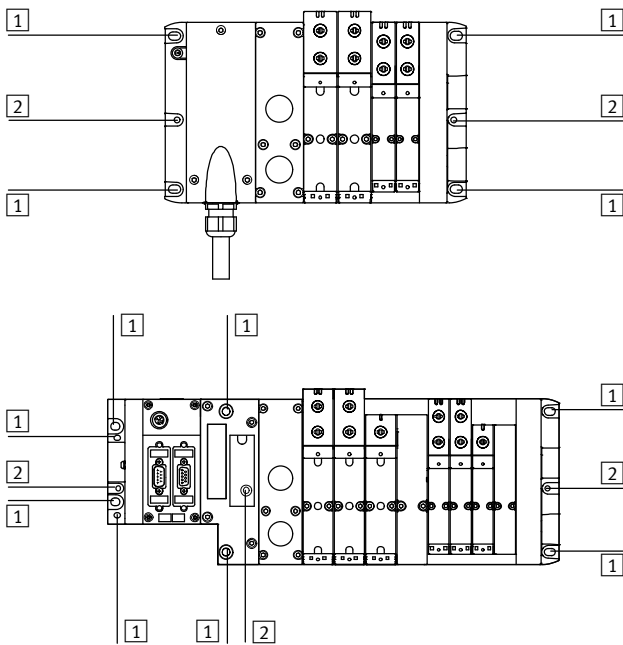

1 Hole for M6 screw

2 Hole for H-rail mounting

The valve terminal VTSA/VTSA-F is screwed onto the mounting surface using M6 screws. The mounting holes are located at the following points:

- Multi-pin plug (4 pieces):
2 each on the multi-pin connection block and the right-hand end plate
- Fieldbus, CPX (6 pieces):
2 each on the left-hand (CPX) and right-hand (VTSA/VTSA-F) end plate and the pneumatic interface

Mounting brackets can be mounted on pneumatic supply plates and manifold sub-bases.

If using CPX components, see:

➔ Internet: cpx


 Note

Wall mounting of the VTSA/VTSA-F with more than five pneumatic modules

Note the following information to avoid damage to the valve terminal:

- Additionally use mounting brackets of the type VAME-S6-W-M46
- Mount these at each fourth plate (manifold sub-base, supply plate or exhaust plate), counting from left to right, starting after the pneumatic interface.
- No mounting bracket is required next to the right-hand end plate.
- Make sure to use the pre-assembled mounting brackets when mounting factory pre-assembled valve terminals on a wall.

Wall mounting with CPX polymer interface

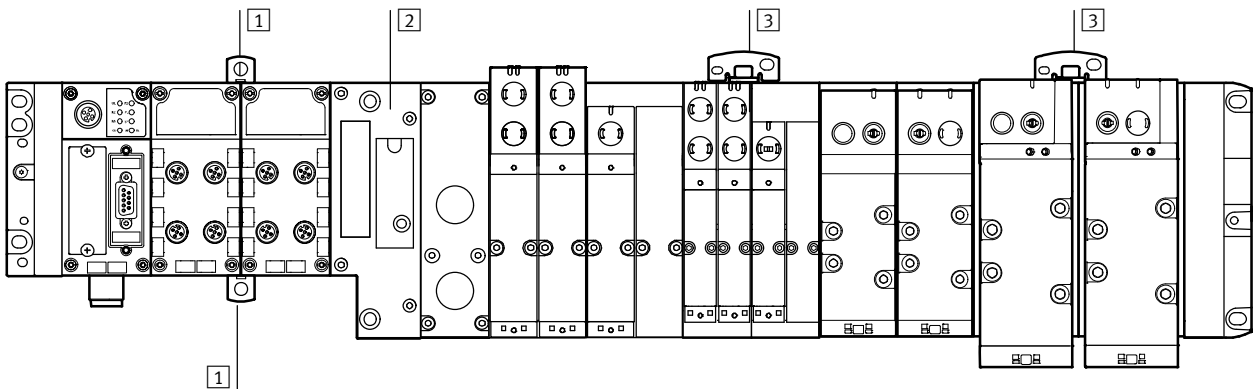

1 Additional wall mounting for polymer CPX terminal

2 Pneumatic interface

3 Additional wall mounting for VTSA/VTSA-F

(with hole for M5 and M6 screw)

In the case of CPX terminals in polymer design with 4 and more interlinking blocks, additional wall mountings of the type CPX-BG-RW must be used

approx. every 100 ... 150 mm. These mountings are clipped in at the top and bottom between the CPX modules.


In the case of the VTSA/VTSA-F, mounting brackets must be mounted on the wall as instructed above.

Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

Valve terminal VTSA/VTSA-F

Key features – Assembly

Wall mounting with CPX metal interface

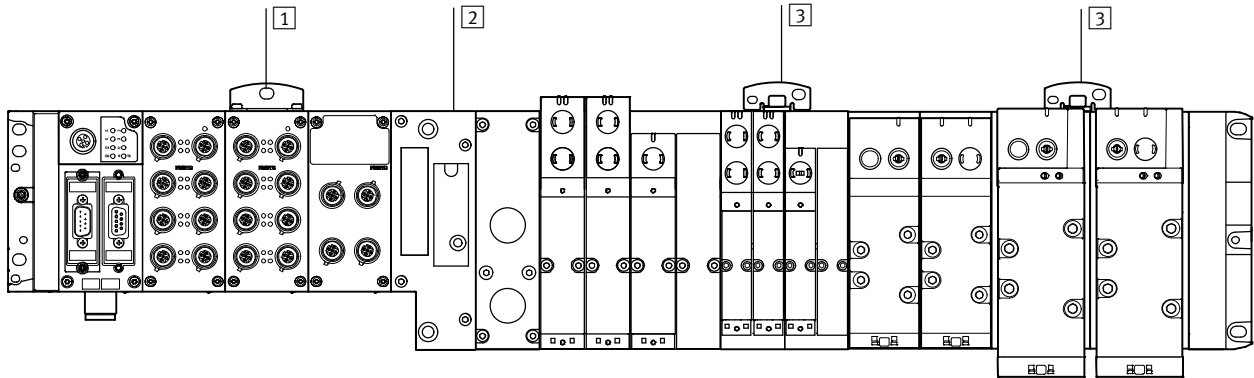

1 Additional wall mounting for metal CPX terminal

2 Pneumatic interface

3 Additional wall mounting for VTSA/VTSA-F


(with hole for M5 and M6 screw)

In the case of CPX terminals in metal design with 4 and more interlinking blocks, additional wall mountings of the type CPX-M-BG-RW must be used

approx. every 100 ... 150 mm. These wall mountings are screwed in at the top on the corresponding CPX module.

In the case of the VTSA/VTSA-F, mounting brackets must be mounted on the wall as instructed above. Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

Mounting on support system with CPX metal interface

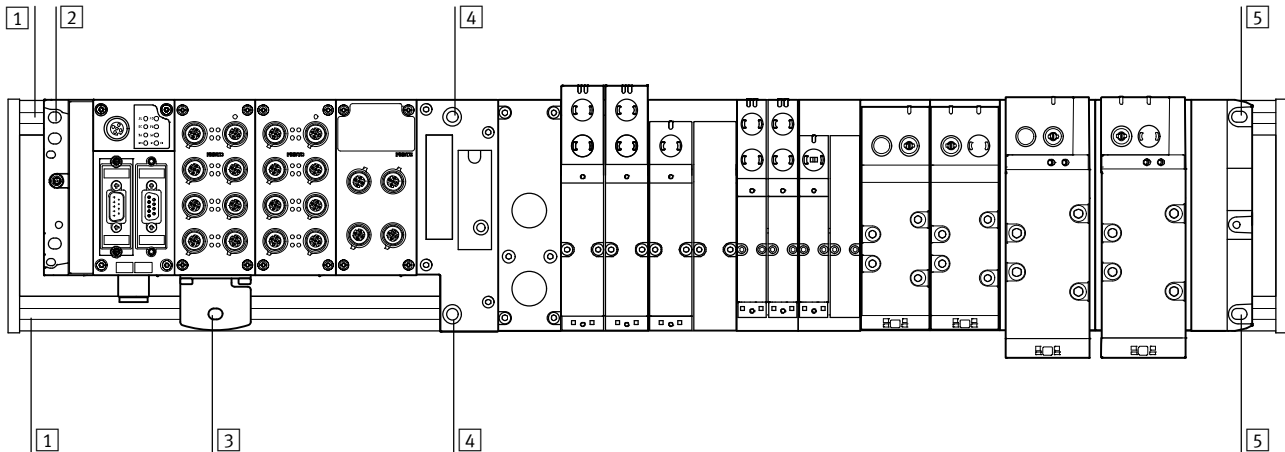

1 Support system (DIN mounting rail)

2 Upper mounting for CPX metal, left-hand end plate on DIN mounting rail

3 Lower mounting for CPX metal on DIN mounting rail with mounting bracket CPX-M-BG-VT-2X

4 Mounting for pneumatic interface on DIN mounting rail

5 Mounting for right-hand end plate on DIN mounting rail

If a terminal CPX (metal version) with VTSA pneumatics is mounted on DIN mounting rails, it may be necessary to have one or more mounting brackets on the CPX side to compensate for the length. Length compensation is made

possible by special mounting brackets CPX-M-BG-VT-2X. The mounting bracket connects the terminal CPX (metal version) to the DIN mounting rail.

- Note


- Only CPX modules (metal version) with VTSA/VTSA-F modules of width 18 ... 52 mm may be used.
- The number of mounting brackets required depends on the number of CPX modules installed and whether any system feeds are

present. Further information about assembling the valve terminal can be found in the assembly instructions in the Festo Support portal.
 → Internet: 2D/3D CAD
 → www.festo.com/sp

Valve terminal VTSA/VTSA-F

Key features – Assembly

H-rail mounting

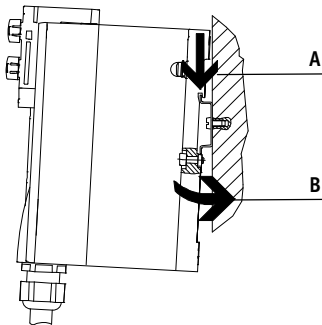

The valve terminal VTSA/VTSA-F is hooked onto the H-rail (see arrow A). It is then swivelled onto the H-rail and secured in place with the clamping component (see arrow B).

For H-rail mounting of the valve terminal you will need the following VTSA/VTSA-F mounting kit:


- CPX-CPA-BG-NRH

This enables the valve terminal to be mounted on an H-rail to EN 60715.

 Note

- Wall mounting is recommended if more than one vertical stacking element or a long valve terminal design is required.
- Vibration/shock loads are not permissible with H-rail mounting.
- Only horizontal mounting position are permissible with H-rail mounting.

Individual valve mounting

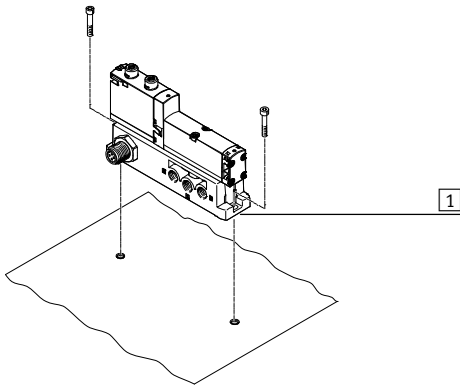

1 Vertical mounting holes

The individual sub-base for wall mounting is designed for integration into a system or machine. It is mounted vertically.

Valve terminal VTSA/VTSA-F

Key features – Display and operation

Display and operation

Each solenoid coil is allocated an LED which indicates its switching status.

- Indicator 12 shows the switching status of the pilot control for output 2
- Indicator 14 shows the switching status of the pilot control for output 4

Manual override (MO):

The manual override enables the valve to be switched when not electrically actuated or when de-energised.

The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override.

Alternatives:

- The cover cap (code N) limits the function of the manual override, preventing it from being locked. The valve can then be actuated with non-detenting operation only.
- The cover cap (code V) can be used to secure the manual override against accidental actuation.
- The heavy-duty cover cap protects the manual override located on the valve. The valve can be actuated as non-detenting or as detenting via accessory.




Note

Special valve variants with pre-assembled cover caps for the manual

override are available for valve terminal VTSA/VTSA-F.

Pneumatic connection and control elements

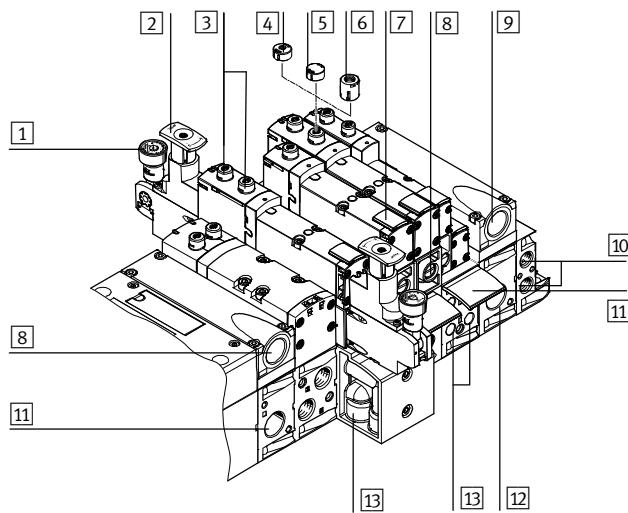


- 1 Pressure gauge (optional)
- 2 Adjusting knob for optional pressure regulator plate
- 3 Manual override (MO) (for each pilot solenoid coil, non-detenting or non-detenting/detenting)
- 4 Cover cap for MO, non-detenting
- 5 Cover cap for MO, covered
- 6 Cover cap for MO, non-detenting, heavy-duty, detenting via accessory
- 7 Inscription label holder for valve
- 8 Adjusting screw of optional flow control plate
- 9 Exhaust ports "Valves" (3/5)
- 10 Pilot ports 12 and 14 for supplying external pilot air
- 11 Inscription label holder for sub-base
- 12 Supply port 1 (operating pressure)
- 13 Working ports 2 and 4, for each valve position



Note

A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

Electrical connection and display components

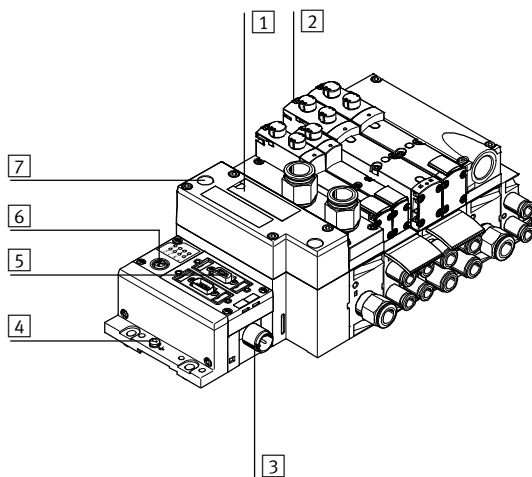


- 1 Inscription area and cover for H-rail mounting
- 2 Yellow LEDs: signal status display for pilot solenoid coils
- 3 Power supply connection
- 4 Earth terminal
- 5 Fieldbus connection (bus-specific)
- 6 Service interface for handheld unit, etc.
- 7 Red LED: common error display for valves

Valve terminal VTSA/VTSA-F

Key features – Display and operation


Manual override (MO) – Function

MO with automatic reset (non-detenting)



- 1 Press in the stem of the manual override using a pointed object or screwdriver. The valve is in switching position.
- 2 Remove the pointed object or screwdriver. The spring force pushes the stem of the manual override back. The valve returns to its initial position (not with double solenoid valve code J).

MO with detent (covered)



- 1 Press in the stem of the manual override using a pointed object or screwdriver until the valve switches and then turn the stem clockwise by 90° until the stop is reached. The valve remains in switching position.
- 2 Turn the stem anti-clockwise by 90° until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the stem of the manual override back. The valve returns to its initial position (not with double solenoid valve code J or D).


Cover caps for manual override

Cover cap for MO, non-detenting, heavy-duty, with automatic reset (non-detenting/detenting via accessory)




- 1 Non-detenting: push in key for MO. The valve is in switching position. Detenting: turn coded key in switching position clockwise through 90° until stop. Valve remains in switching position. In this position the key is latched and cannot be removed.
- 2 Turn key anticlockwise through 90° until the stop. The key is now unlatched. The key is pushed out by the spring force of the manual override. The valve returns to its initial position (not with double solenoid valve code J or D).

Cover cap for MO, with automatic return (non-detenting)



- 1 Restricted function, non-detenting: push in the stem of the MO cap using a pointed object or screwdriver. The valve is in switching position.
- 2 Remove the pointed object or screwdriver. The spring force pushes the stem of the manual override back. The valve returns to its initial position (not with double solenoid valve code J or D).

Cover cap for MO, covered



By covering the cover cap, the MO can be secured against accidental actuation.

- - Note









Cover caps for the manual override can be ordered separately as accessories.

There are also VSVA valve variants with pre-assembled cover caps.

Valve terminal VTSA/VTSA-F

Key features – Display and operation



| Overview of valve variants and cover caps for manual override (MO) | | | | |
|---|---------------|--|--|---|
| Illustration | Terminal code | Description of valve terminal order code | Manual override (MO) | Valve code identification on the rating plate sticker ¹⁾ |
| VSVA solenoid valve without cover cap | | | | |
|  | R | Without cover cap on MO | Non-detenting, detenting | VSVA-B- ... -MZD- ... |
| VSVA solenoid valve with pre-assembled cover cap on MO | | | | |
|  | B | MO non-detenting/heavy duty with cover cap, can be used as detenting via accessory (key), as valve variant | Non-detenting, detenting via accessory (key) | VSVA-B- ... -MZTR- ... |
|  | C | MO can be used as non-detenting only with coded cover cap, as valve variant | Non-detenting | VSVA-B- ... -MZH- ... |
|  | D | MO concealed by cover cap – MO operation prevented, as valve variant | Covered | VSVA-B- ... -MZ- ... |
| Cover caps for MO | | | | |
|  | N | MO can be used as non-detenting only with coded cover cap | Non-detenting | VSVA-B- ... -MZD- ... |
|  | V | MO concealed by cover cap – MO operation prevented | Covered | VSVA-B- ... -MZD- ... |
|  | A | MO non-detenting/heavy duty with cover cap, detenting via accessory (key) | Non-detenting, detenting via accessory | VSVA-B- ... -MZD- ... |
| Accessory for manual override, heavy duty | | | | |
|  | - | Coded key (accessory) for actuating MO, non-detenting/heavy duty, for detenting position | For manual override, detenting | - |

1) As an example, here the part code for a 5/2-way single solenoid valve, mechanical spring return is used (e.g.: VSVA-B-M52-MZTR-A2-1T1L)

 Note


Cover caps for non-detenting/heavy duty manual override, detenting via accessory, are provided for one-time use only.

In the event of multiple use, reliable locking of the cover cap cannot be guaranteed.

Valve terminal VTSA/VTSA-F

Key features – Electrical components

Identification system

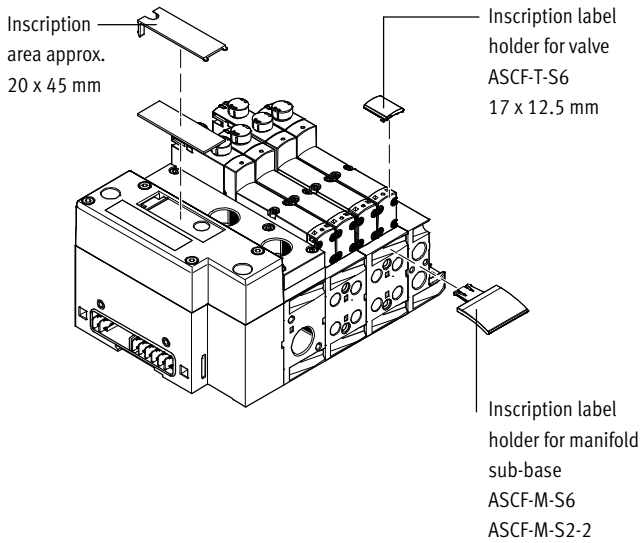

Inscription label holders can be applied to the valves and manifold sub-bases to identify them. These inscription label holders can be ordered by entering the code B or T in the order code for accessories.

Scope of delivery: inscription label holder including inscription label. The following inscription labels can be used as spares:

- Inscription label holder for valve type ASCF-T-S6: Part No. 540888


- Inscription label holder for manifold sub-base type ASCF-M-S6: Part No. 540889
 - Inscription label holder for manifold sub-base (for valve width 52 mm) Type ASCF-M-S2-2 Part No. 562577
- Large inscription labels can be attached to the pneumatic interface as an alternative or in addition to the smaller labels.

Protective circuit


Each VSVA solenoid coil is provided with a spark arresting protective circuit and protected against polarity reversal.

The 24 V DC version of width 52 mm additionally features integrated holding current reduction.


24 V DC version (width 18 to 42 mm)

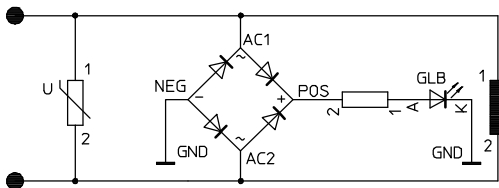

110 V AC version (width 18 to 52 mm)

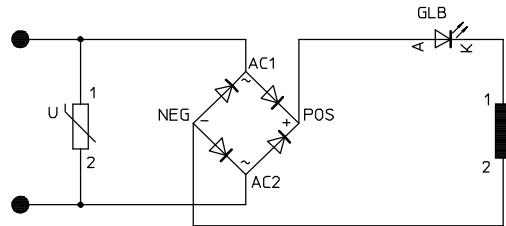

24 V DC version (width 52 mm)

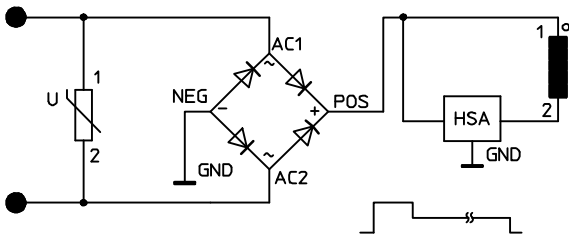

Individual valve

Valves can also be used on individual sub-bases if actuators are further away from the valve terminal.

- Electrical connection M12, 4-pin 24 V DC
- 4-pin clamped terminal connection for configuration by the user 24 V DC or 110 V AC
- Cable (open end) for configuration by the user 24 V DC or 110 V AC

Individual electrical connection

A maximum of 20 solenoid coils can be actuated. 2 solenoid coils per valve can be addressed.

Individual electrical connection:

- M12
- 6-way or 10-way
- 5-pin
- 24 V DC

Valve terminal VTSA/VTSA-F

Key features – Electrical components

Electrical multi-pin plug connection

The following multi-pin plug connection variants are offered for the valve terminal VTSA/VTSA-F:

- Sub-D multi-pin plug connection (37-pin for 24 V DC): this valve terminal can be equipped with 1 ... 16 valve positions (with double solenoid valves) or with 1 ... 32 valve positions (with single solenoid valves). A maximum of 32 solenoid coils can be actuated.
- Terminal box (terminal strip for 24 V DC or 110 V AC): this valve terminal can be equipped with 1 ... 16 valve positions (with double

solenoid valves), or with 1 ... 32 valve positions (with single solenoid valves). A maximum of 32 solenoid coils can be actuated.

- Multi-pin node (round plug connector): electrical multi-pin plug connection with round plug connector, 19-pin to CNOMO E03.62.530.N, connecting thread M23 for 24 V DC. The valve terminal can be fitted with max. 16 solenoid coils.

The valves are switched by means of positive or negative logic (PNP or

NPN). Mixed operation is not permitted.

Each pin on the multi-pin plug (Sub-D) or terminal box (terminal strip) can actuate exactly one solenoid coil.

When using the maximum configurable number of 32 valve positions, 32 valves can be addressed, each with a single solenoid coil.

With 16 or fewer valve positions, 2 solenoid coils per valve can be addressed.



Note

Use the following 37-pin connecting cables from Festo to connect the valve terminal VTSA/VTSA-F with Sub-D multi-pin plug connection:

- NEBV-S1W37-...-LE10 for max. 8 solenoid coils
- NEBV-S1W37-...-LE26 for max. 22 solenoid coils
- NEBV-S1W37-...-LE37 for max. 32 solenoid coils
- NECV-S1W37 plug connector for self-assembly

AS-Interface connection

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils.

The valve terminal with AS-Interface connection is based on the same

electrical interlinking module as the valve terminal with multi-pin plug connection.

This means it is possible to convert a valve terminal with multi-pin plug connection using an AS-Interface

module.

The technical specifications of the AS-Interface system must be observed in this case.



Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if 4 solenoid coils (width 52 mm) are simultaneously supplied with current.

More information can be found at:

➔ Internet: as-interface

Fieldbus connection/control block

All functions and features of the electrical peripherals CPX apply in connection with the CPX interface. This means:

- The valves and electrical outputs are supplied via the operating voltage connection CPX

- The valves are supplied and switched off independently via a separate port on the CPX



Note

More information can be found at:

➔ Internet: cpx

Valve terminal VTSA/VTSA-F

Key features – Electrical components

Rules for addressing

Address allocation

Address allocation does not depend on whether single- or double solenoid valves are fitted.

Addresses are allocated in ascending order without gaps, from left to right.

Single solenoid valve

A valve position for actuating one solenoid coil (VABV...T1) occupies one address.

Double solenoid valve

A valve position for actuating two solenoid coils (VABV...T2) occupies two addresses. The following assignment applies in this case:

- Coil 14: lower-value address
- Coil 12: higher-value address

Pin allocation – Multi-pin plug, Sub-D socket, 24 V DC; electrical connection code MP1

| | Pin ²⁾ | Address/coil | Wire colour ¹⁾ | Pin ²⁾ | Address/coil | Wire colour ¹⁾ |
|---|-------------------|-------------------|---------------------------|-------------------|-------------------|---------------------------|
| | 1 | 0 | WH | 17 | 16 | WH PK |
| | 2 | 1 | BN | 18 | 17 | PK BN |
| | 3 | 2 | GN | 19 | 18 | WH BU |
| | 4 | 3 | YE | 20 | 19 | BN BU |
| | 5 | 4 | GY | 21 | 20 | WH RD |
| | 6 | 5 | PK | 22 | 21 | BN RD |
| | 7 | 6 | BU | 23 | 22 | GY GN |
| | 8 | 7 | RD | 24 | 23 | YE GY |
| | 9 | 8 | GY PK | 25 | 24 | PK GN |
| | 10 | 9 | RD BU | 26 | 25 | YE PK |
| | 11 | 10 | WH GN | 27 | 26 | GN BU |
| | 12 | 11 | BN GN | 28 | 27 | YE BU |
| | 13 | 12 | WH YE | 29 | 28 | GN RD |
| | 14 | 13 | YE BN | 30 | 29 | YE RD |
| | 15 | 14 | WH GY | 31 | 30 | GN BK |
| | 16 | 15 | GY BN | 32 | 31 | GY BU |
| <p>Note</p> <p>The drawing shows a plan view of the Sub-D plug socket on the connecting cable NEBV-S1W37-....</p> | Conductor | | | | | |
| | 33 | 0 V ³⁾ | YE BK | 35 | 0 V ³⁾ | BN BK |
| | 34 | 0 V ³⁾ | WH BK | 36 | 0 V ³⁾ | BK |
| | Earthing | | | | | |
| 37 | FE | VT | - | - | - | |

1) To IEC 757

2) Pin 9 ... 35: not assigned with connecting cable NEBV-S1-W37-...-LE10

Pin 23 ... 33: not assigned with connecting cable NEBV-S1-W37-...-LE26

Pin 24 ... 33: not assigned with connecting cable NEBV-S1-W37-...-LE27

3) 0 V for positive switching control signals; connect 24 V for negative switching control signals; mixed operation is not permitted.

Valve terminal VTSA/VTSA-F


Key features – Electrical components



Dimensions

Download CAD data → www.festo.com

Connecting cable NEBV-S1W37-...

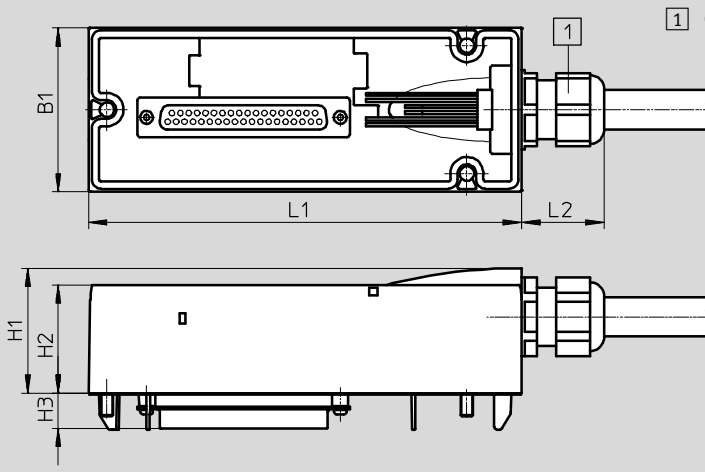

1 Cable connector M20x1.5

The wire colours refer to the following pre-assembled connecting cables from Festo:

- NEBV-S1W37-...-LE10 for valve terminal with max. 8 solenoid coils
- NEBV-S1W37-...-LE26 for valve terminal with max. 22 solenoid coils
- NEBV-S1W37-...-LE37 for valve terminal with max. 32 solenoid coils

| Type | B1 | H1 | H2 | H3 | L1 | L2 |
|------------|----|----|----|------|-----|----|
| NEBV-S1W37 | 54 | 41 | 36 | 11.6 | 142 | 27 |

Pin allocation – Multi-pin plug, Sub-D plug, 24 V DC, connecting cable; electrical connection code MP1

| | Sheath | Length [m] | Cable composition [mm ²] | Cable diameter [mm] | Part No. | Type |
|-----|---|------------|--------------------------------------|---------------------|------------------------|------------------------|
| | Polyurethane | 2.5 | 10 x 0.34 | 7.7 | 539240 | NEBV-S1W37-E2.5-LE10 |
| | | 5 | | | 539241 | NEBV-S1W37-E5-LE10 |
| | | 10 | | | 539242 | NEBV-S1W37-E10-LE10 |
| | | 2.5 | 26 x 0.34 | 11.5 | 539243 | NEBV-S1W37-E2.5-LE26 |
| | | 5 | | | 539244 | NEBV-S1W37-E5-LE26 |
| | | 10 | | | 539245 | NEBV-S1W37-E10-LE26 |
| | | 2.5 | 37 x 0.34 | 13 | 539246 | NEBV-S1W37-K2.5-LE37 |
| | | 5 | | | 539247 | NEBV-S1W37-K5-LE37 |
| | | 10 | | | 539248 | NEBV-S1W37-K10-LE37 |
| | Polyvinyl chloride Cable properties (standard) | 2.5 | 10 x 0.34 | 7.7 | 543271 | NEBV-S1W37-KM-2.5-LE10 |
| | | 5 | | | 543272 | NEBV-S1W37-KM-5-LE10 |
| | | 10 | | | 543273 | NEBV-S1W37-KM-10-LE10 |
| | | 2.5 | 27 x 0.34 | 11.5 | 543274 | NEBV-S1W37-KM-2.5-LE27 |
| | | 5 | | | 543275 | NEBV-S1W37-KM-5-LE27 |
| | | 10 | | | 543276 | NEBV-S1W37-KM-10-LE27 |
| 2.5 | | 37 x 0.34 | 13 | 543277 | NEBV-S1W37-KM-2.5-LE37 | |
| 5 | | | | 543278 | NEBV-S1W37-KM-5-LE37 | |
| 10 | | | | 543279 | NEBV-S1W37-KM-10-LE37 | |

Valve terminal VTSA/VTSA-F

Key features – Electrical components



| Pin allocation – Multi-pin, terminal strip (Cage Clamp®), 24 V DC and 110 V AC; electrical connection code T (based on standard: EN 61984) | | | | | |
|--|-----------|--------------|--|----------|--------------|
| | Terminal | Coil/address | | Terminal | Coil/address |
| <p>Each solenoid coil must be assigned to a specific terminal on the terminal strip in order for the valves to be actuated.</p> | 1 | 0 | | 17 | 16 |
| | 2 | 1 | | 18 | 17 |
| | 3 | 2 | | 19 | 18 |
| | 4 | 3 | | 20 | 19 |
| | 5 | 4 | | 21 | 20 |
| | 6 | 5 | | 22 | 21 |
| | 7 | 6 | | 23 | 22 |
| | 8 | 7 | | 24 | 23 |
| | 9 | 8 | | 25 | 24 |
| | 10 | 9 | | 26 | 25 |
| | 11 | 10 | | 27 | 26 |
| | 12 | 11 | | 28 | 27 |
| | 13 | 12 | | 29 | 28 |
| | 14 | 13 | | 30 | 29 |
| | 15 | 14 | | 31 | 30 |
| | 16 | 15 | | 32 | 31 |
| <p> Note</p> <p>The drawing shows a plan view of the multi-pin terminal strip (Cage Clamp®).</p> | Conductor | | | | |
| | 33 | 0 V | | 35 | 0 V |
| | 34 | 0 V | | 36 | 0 V |

| Pin allocation – Multi-pin, round plug connector, 24 V DC; electrical connection code MP4 | | | | | |
|---|---------|-------------------|--|---------|-------------------|
| | Address | Pin ¹⁾ | | Address | Pin ¹⁾ |
| | 0 | 15 | | 8 | 17 |
| | 1 | 7 | | 9 | 9 |
| | 2 | 5 | | 10 | 2 |
| | 3 | 4 | | 11 | 13 |
| | 4 | 16 | | 12 | 11 |
| | 5 | 8 | | 13 | 10 |
| | 6 | 3 | | 14 | 1 |
| | 7 | 14 | | 15 | 18 |



| Pin allocation – Multi-pin plug, round plug connector, 24 V DC; electrical connection – CNOMO assignment | | | | | |
|--|-----|----------------------------------|----|--------|----------------------------------|
| | Pin | Valve position/ solenoid coil | | Pin | Valve position/ solenoid coil |
| | 1 | 8/14 | | 10 | 7/12 |
| | 2 | 6/14 | | 11 | 7/14 |
| | 3 | 4/14 | | 12 | FE |
| | 4 | 2/12 | | 13 | 6/12 |
| | 5 | 2/14 | | 14 | 4/12 |
| | 6 | 0 V ¹⁾ | | 15 | 1/14 |
| | 7 | 1/12 | | 16 | 3/14 |
| | 8 | 3/12 | | 17 | 5/14 |
| | 9 | 5/12 | | 18 | 8/12 |
| | | | 19 | Unused | |

1) Pin 6: 0 V for positive switching control signals; connect 24 V for negative switching control signals; mixed operation is not permitted.
 Pin 12: earth
 Pin 19: unused

Valve terminal VTSA/VTSA-F

Key features – Electrical components

Electrical connection, individual valve with connector plug 24 V DC up to width 52 mm

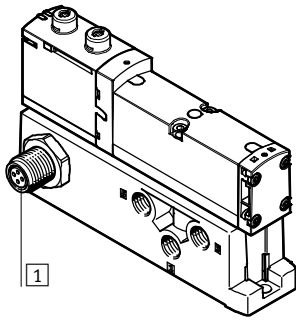

1 Connector plug M12x1, 4-pin to EN 61076-2-101

Pin allocation M12 on individual valve to ISO 20401



With positive logic:

- Pin1 – Unused
- Pin2 – U_B for coil 12
- Pin3 – 0 V for coil 12 and 14
- Pin4 – U_B for coil 14

With negative logic:

- Pin1 – Unused
- Pin2 – 0 V for coil 12
- Pin3 – U_B for coil 12 and 14
- Pin4 – 0 V for coil 14

Electrical connection, individual valve 24 V DC or 110 V AC up to width 52 mm

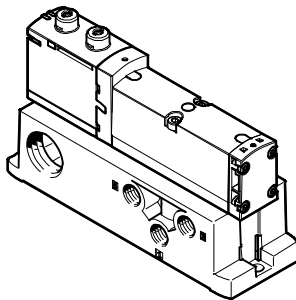

1 Connector plug M12x1, 5-pin

Pin allocation for assembly by the user



With positive logic:

- Pin1 – Unused (with 110 V AC connection for earthing)
- Pin2 – U_B for coil 12
- Pin3 – 0 V for coil 12 and 14
- Pin4 – U_B for coil 14

With negative logic:

- Pin1 – Unused
- Pin2 – 0 V for coil 12
- Pin3 – U_B for coil 12 and 14
- Pin4 – 0 V for coil 14

Individual electrical connection, 6-way or 10-way, 24 V DC, code MP2/MP3 for valve terminal up to width 52 mm

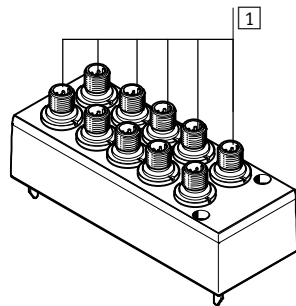

1 Connector plug M12x1, 5-pin

Pin allocation M12

With positive logic:

- Pin1 – Unused
- Pin2 – U_B for coil 12
- Pin3 – 0 V for coil 12 and 14
- Pin4 – U_B for coil 14
- Pin5 – Functional earth

Pin allocation M12

With negative logic:

- Pin1 – Unused
- Pin2 – 0 V for coil 12
- Pin3 – U_B for coil 12 and 14
- Pin4 – 0 V for coil 14
- Pin5 – Functional earth

-  - Note

Mixed operation of positive switching (PNP) and negative switching (NPN) control signals is not permitted.

Valve terminal VTSA/VTSA-F

Instructions for use

FESTO

System equipment

Operate system equipment with unlubricated compressed air if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life.

The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate all of your system equipment with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the actuator used.

Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal.

Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40 °C).

Bio-oils





When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m³ must not be exceeded (see ISO 8573-1:2010 Class 2).


Mineral oils

When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alpha-olefins (PAO), the maximum residual oil content of 5 mg/m³ must not be exceeded (see ISO 8573-1:2010 Class 4). A higher residual oil content irrespective of the compressor oil cannot be permitted, as the basic lubricant would be flushed out over time.

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal


-  - Valve width to ISO 15407-2
 - 18 mm
 - 26 mm
-  - to ISO 5599-2
 - 42 mm (ISO 1)
 - 52 mm (ISO 2)
-  - Voltage
 - 24 V DC
 - 110 V AC
-  - Flow rate¹⁾
 - Width 18 mm: up to 550 (700) l/min
 - Width 26 mm: up to 1100 (1350) l/min
 - Width 42 mm: up to 1300 (1860) l/min
 - Width 52 mm: up to 2900 l/min

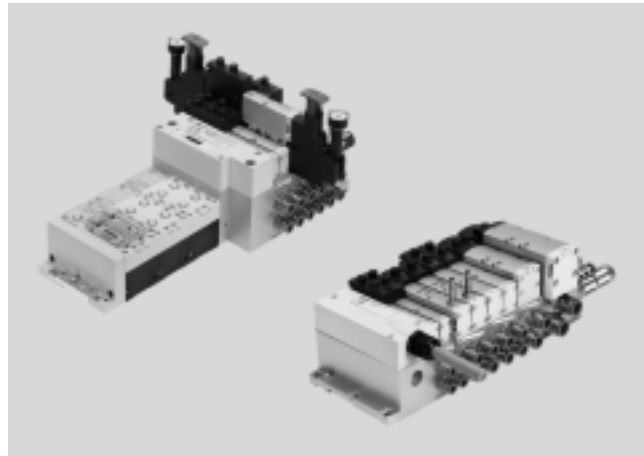

1) Flow rates in brackets apply to VTSA-F

| General technical data | | |
|---|--|--|
| Terminal type VTSA/VTSA-F | VTSA is the standard type, VTSA-F is the type with optimised flow rate | |
| Valve sizes | Widths 18 mm, 26 mm, 42 mm, 52 mm, extendable with adapter to 65 mm | |
| Actuation type | Electrical | |
| Electrical actuation | With multi-pin plug: multi-pin | |
| | With fieldbus: integrated controller, fieldbus, Industrial Ethernet | |
| Type of control | Piloted | |
| Exhaust function, with flow control | Via flow control plate | |
| Type of mounting | Wall mounting | |
| | On H-rail to EN 60715 | |
| Mounting position | Any | |
| Manual override | Detenting, non-detenting, covered | |
| Suitable for vacuum | Yes | |
| Valve terminal design | Modular, valve sizes can be mixed | |
| Max. no. of valve positions | 32 ¹⁾ | |
| Pneumatic connections – Threaded connection | | |
| Pneumatic port | Via manifold sub-base | |
| Supply port | 1 | Dependent on the end plate or air supply plate used (and adapter plate when using ISO size 3 valves) |
| Exhaust port | 3/5 | Dependent on the end plate or air supply plate used (and adapter plate when using ISO size 3 valves) |
| Working ports | 2/4 | Depending on the connection type selected |
| External pilot air supply port | 14 | Dependent on the end plate used (and adapter plate when using ISO size 3 valves) |
| Pilot exhaust air port | 12 | Dependent on the end plate used (and adapter plate when using ISO size 3 valves) |

1) Dependent on the electrical interface and the manifold sub-bases used

-  - Note: This product conforms to ISO 1179-1 and to ISO 228-1

**New**

Valves with terminal code SA, SB, SD, SE for widths 18 and 26

FESTO

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

| Standard nominal flow rate of valve/valve terminal [l/min], 24 V DC, 110 V AC | | | | | | | |
|--|---------------|--|--|--|---|---|---|
| Valve function (with valve code) | Terminal code | Width 18 mm | | | Width 26 mm | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F |
| 5/2-way, double solenoid (B52) | J | 750 | 550 | 700 | 1400 | 1100 | 1350 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 750 | 550 | 700 | 1400 | 1100 | 1350 |
| 5/2-way, single solenoid, pneum. spring (M52-A) | M | 750 | 550 | 700 | 1400 | 1100 | 1350 |
| 5/2-way single solenoid, mech. spring (M52-M) | O | 750 | 550 | 700 | 1400 | 1100 | 1350 |
| 5/3-way, closed (P53C) | G | 700 | 450 | 650 | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted (P53E) | E | 700 ¹⁾ 330 ²⁾ | 450 ¹⁾ 330 ²⁾ | 480 ¹⁾ 330 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 700 ¹⁾ 330 ²⁾ | 450 ¹⁾ 330 ²⁾ | 480 ¹⁾ 330 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ |
| 5/3-way vented, switching position 14 detenting, switching position 14 detenting (P53ED) ³⁾ | SA | – | 380 ¹⁾ 380 ²⁾ | 430 ¹⁾ 430 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) ³⁾ | SE | – | 380 ¹⁾ 300 ²⁾ | 460 ¹⁾ 350 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) ³⁾ | SB | – | 380 ¹⁾ 350 ²⁾ | 440 ¹⁾ 400 ²⁾ | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) ³⁾ | SD | – | 370 ¹⁾ 340 ²⁾ | 430 ¹⁾ 360 ²⁾ | – | 850 ¹⁾ 820 ²⁾ | 950 ¹⁾ 860 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x3/2-way, single solenoid, open (T32U) | N | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x3/2-way, single solenoid, open (T32F) | P | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 600 | 400 | 550 | 1250 | 900 | 1150 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 700 | 500 | 650 | 1350 | 1000 | 1300 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 700 | 500 | 650 | 1350 | 1000 | 1300 |

1) Switching position

2) Mid-position

3) The valve functions P53ED, P53EP, P53AD and P53BD are only available in the 24 V DC version. Values only apply to 24 V DC.

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

| Standard nominal flow rate of valve/valve terminal [l/min], 24 V DC, 110 V AC | | | | | | | |
|---|---------------|---|---|---|--|--|--|
| Valve function (with valve code) | Terminal code | Width 42 mm | | | Width 52 mm | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F |
| 5/2-way, double solenoid (B52) | J | 2000 | 1300 | 1860 | 4000 | 2900 | 2900 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 2000 | 1300 | 1860 | 4000 | 2900 | 2900 |
| 5/2-way, single solenoid, pneum. spring (M52-A) | M | 2000 | 1300 | 1860 | 4000 | 2900 | 2900 |
| 5/2-way single solenoid, mech. spring (M52-M) | O | 2000 | 1300 | 1860 | 4000 | 2900 | 2900 |
| 5/3-way, closed (P53C) | G | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ |
| 5/3-way, exhausted (P53E) | E | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) ³⁾ | VG | 1700 ¹⁾ 700 ²⁾ | 1400 ¹⁾ 800 ²⁾ | 1700 ¹⁾ 700 ²⁾ | 3000 ¹⁾ 900 ²⁾ | 2300 ¹⁾ 900 ²⁾ | 2300 ¹⁾ 900 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1600 | 1200 | 1300 | 3000 | 2400 | 2400 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1600 | 1400 | 1500 | 4000 | 2800 | 2800 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1600 | 1400 | 1500 | – | – | – |

1) Switching position

2) Mid-position


3) The valve function P53F is only available in the 24 V DC version. Values only apply to 24 V DC.

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal


Flow rate q_n as a function of output pressure p_2 with pressure regulator plates (P regulator plate) for port 1

6 bar

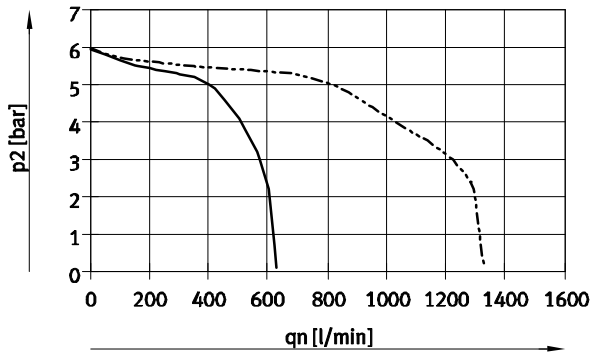


— Width 18 mm
 - - - Width 26 mm

10 bar

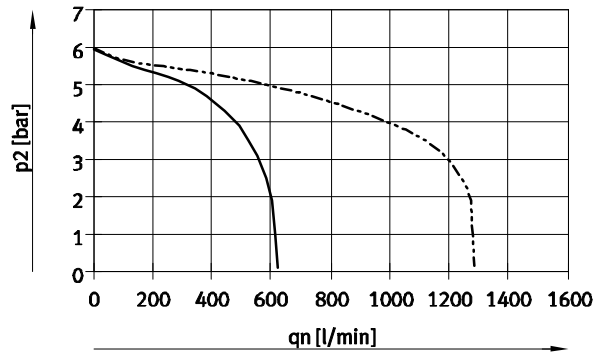


— Width 18 mm
 - - - Width 26 mm

Supply pressure 10 bar, set regulated pressure 6 bar

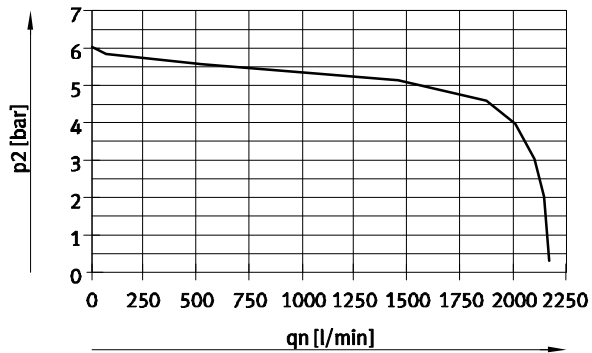

Width 42 mm (ISO 1)

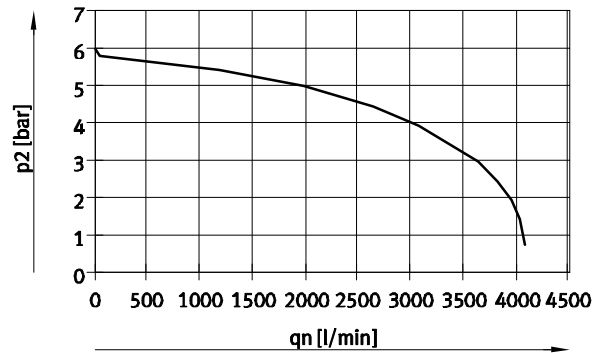


Width 52 mm (ISO 2)

Valve terminal VTSA/VTSA-F


Technical data – Valve terminal

Flow rate q_n as a function of output pressure p_2 with pressure regulator plates (AB regulator plates) for port 2, 4 or ports 4/2



6 bar

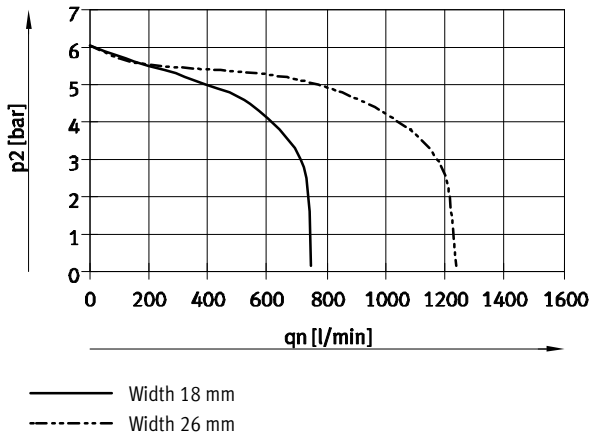

10 bar

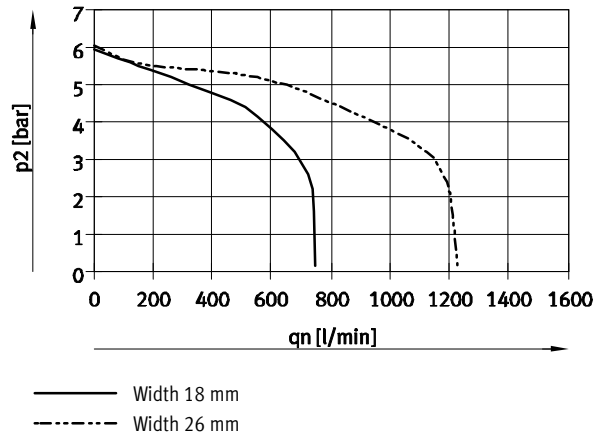

Supply pressure 10 bar, set regulated pressure 6 bar

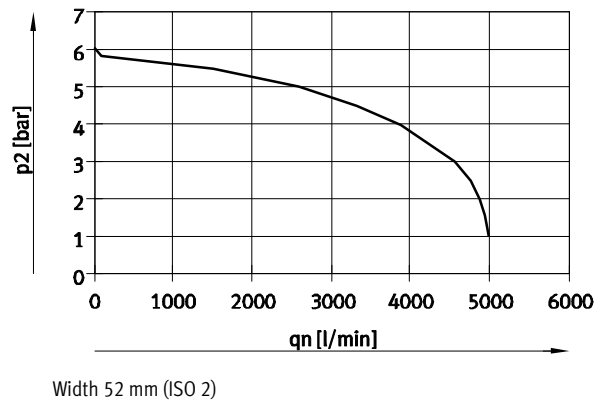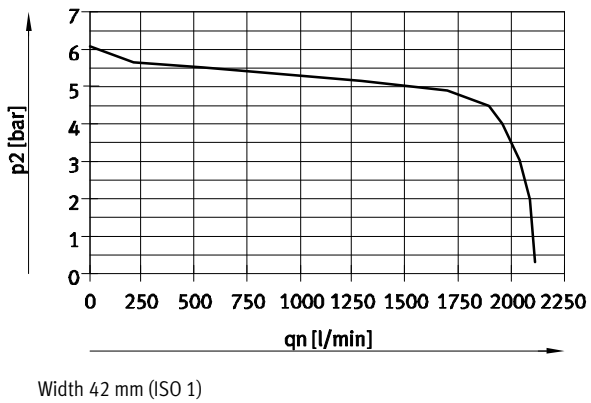


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal


Flow rate q_n as a function of output pressure p_2 with pressure regulator plates (AB regulator plates, rev.) for ports 4/2, reversible

6 bar

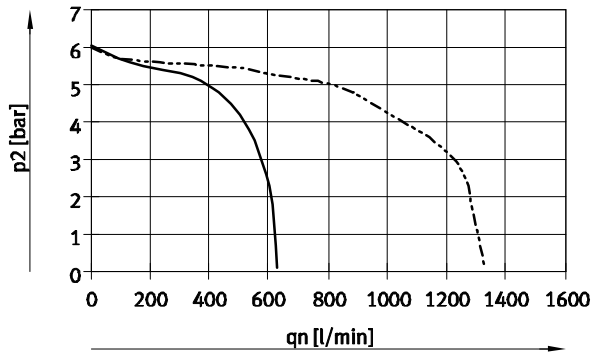


— Width 18 mm
 - - - Width 26 mm

10 bar

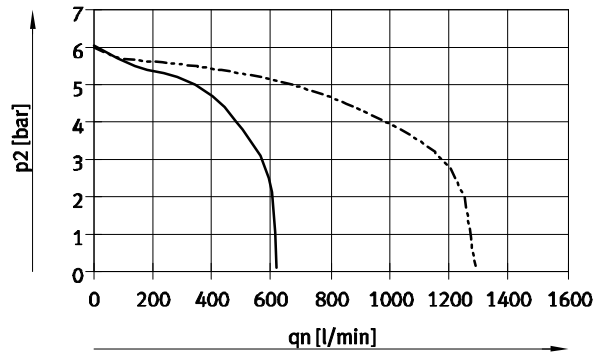


— Width 18 mm
 - - - Width 26 mm

Supply pressure 10 bar, set regulated pressure 6 bar

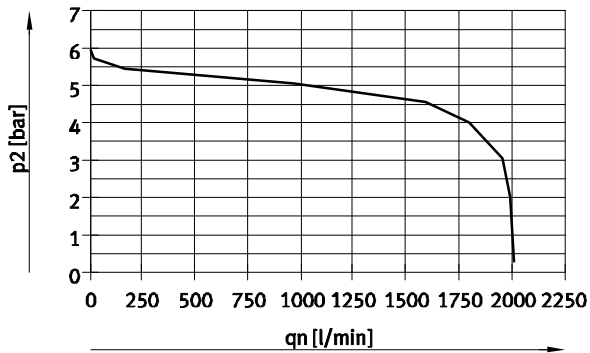

Width 42 mm (ISO 1)

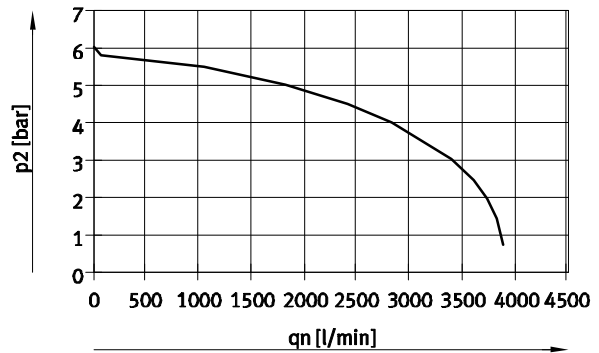


Width 52 mm (ISO 2)


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal


Flow rate q_n as a function of flow control

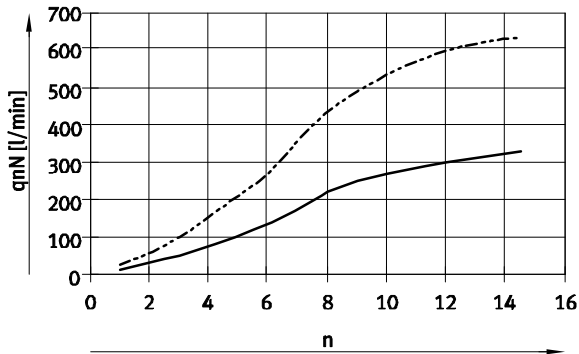

— Width 18 mm
 - - - Width 26 mm

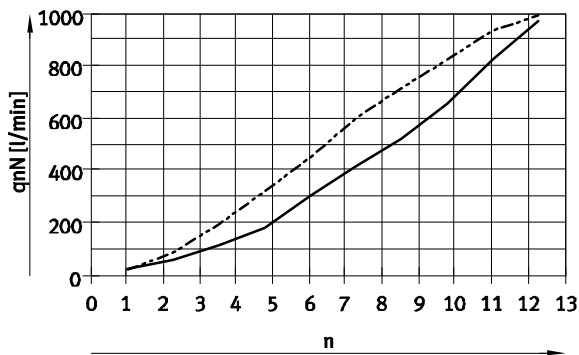


Width 42 mm (ISO 1)
 — Flow control screw from 2 \rightarrow 3
 - - - Flow control screw from 4 \rightarrow 5
 n Revolutions of the adjusting screw

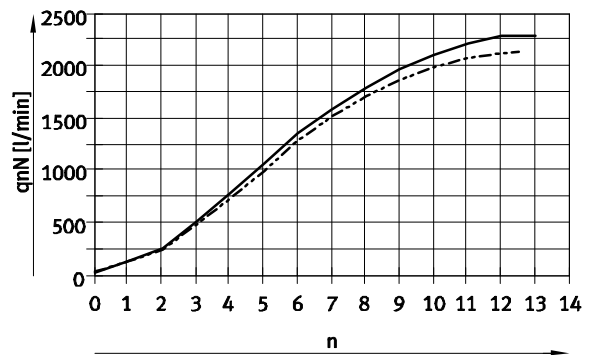

Width 52 mm (ISO 2)
 — Flow control screw from 2 \rightarrow 3
 - - - Flow control screw from 4 \rightarrow 5
 n Revolutions of the adjusting screw

Pilot pressure $p_{12/14}$ as a function of operating pressure p_1

for 3/2-way solenoid valves

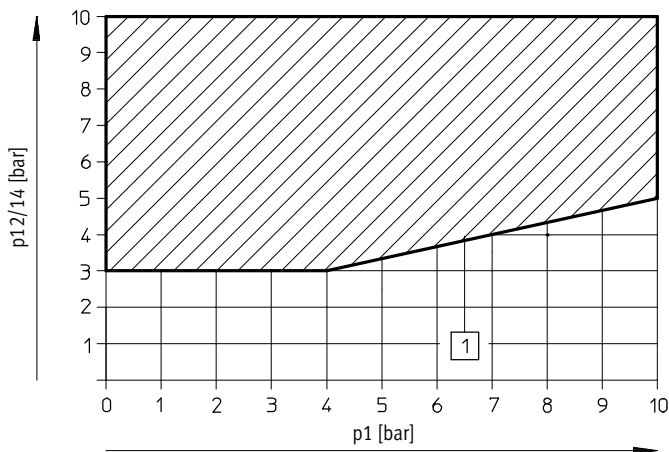

1 Operating range for valves with external pilot air supply

**New**Vertical pressure shut-off plate,
key-operated**FESTO**

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

| Standard nominal flow rate of vertical stacking [l/min] | | | | |
|---|--------------------------|--------------------------|-------|--------------------------|
| Width | 18 mm | 26 mm | 42 mm | 52 mm |
| Flow control plate | | | | |
| VABF-S4-2-F1B1-C | See characteristic curve | – | – | – |
| VABF-S4-1-F1B1-C | – | See characteristic curve | – | – |
| VABF-S2-1-F1B1-C | – | – | 1100 | – |
| VABF-S2-2-F1B1-C | – | – | – | See characteristic curve |
| Vertical supply plate | | | | |
| VABF-S4-2-P1A ... -G18 | 430 | – | – | – |
| VABF-S4-1-P1A ... -G14 | – | 900 | – | – |
| VABF-S2-1-P1A ... -G38 | – | – | 1300 | – |
| VABF-S2-2-P1A ... -G12 | – | – | – | 2800 |
| Vertical pressure shut-off plate | | | | |
| VABF-S4-2-L1D1-C | 400 | – | – | – |
| VABF-S4-2-L1D2-C ¹⁾ | 320 | – | – | – |
| VABF-S4-1-L1D1-C | – | 800 | – | – |
| VABF-S4-1-L1D2-C ¹⁾ | – | 620 | – | – |
| VABF-S2-1-L1D1-M5 | – | – | 1200 | – |
| VABF-S2-2-L1D1-C | – | – | – | 1950 |

1) Key-operated

| Operating and environmental conditions | |
|--|---|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Pilot medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/ pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure for valve terminal, pilot air supply ²⁾ [bar] | –0.9 ... +10 |
| • External | 3 ... 10 |
| • Internal | 3 ... 10 |
| Pilot pressure [bar] | 3 ... 10 |
| Noise level LpA [dB(A)] | 85 |
| Ambient temperature [°C] | –5 ... +50 |
| Temperature of medium [°C] | –5 ... +50 |
| Storage temperature [°C] | –20 ... +60 |
| Relative humidity [%] | 90 |
| Approval certificate | BIA C-Tick c UL us – Recognized (OL) (24 V DC only) CSA (OL) ³⁾ |
| CE marking (see declaration of conformity) | In accordance with EU Low Voltage Directive (only VTSA/VTSA-F-MP, only 110 V AC) In accordance with EU EMC Directive ¹⁾ In accordance with EU Explosion Protection Directive (ATEX, EX1E ²⁾) |
| ATEX category for gas | II 3G (EX1E) |
| Explosion ignition protection type for gas | Ex nA IIC T3 X Gc (EX1E) |
| Explosion-proof ambient temperature [°C] | –5 ... +50 (EX1E) |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

2) Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; operating pressure is 3 ... 10 bar here

3) Approval certificate is valid for VTSA/VTSA-F-MP, VTSA/VTSA-F-FB

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

| Electrical data – Individual electrical connection | | |
|--|--------|--|
| Load voltage supply for valves (U_{val}) | | |
| Operating voltage | [V DC] | 24 ±10% |
| Max. residual current at 24 V DC | [A] | 10 |
| Duty cycle | | 100% |
| Protection class | | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

| Electrical data – Multi-pin plug connection | | |
|--|--------|--|
| Load voltage supply for valves (U_{val}) | | |
| Operating voltage | [V DC] | 24 ±10% |
| | [V AC] | 110 ±10% (50 ... 60 Hz) |
| Max. residual current | [A] | 6 |
| Acceptable current load at 40 °C | [A] | 1 |
| Surge resistance | [kV] | 1.5 |
| Degree of contamination | | 3 |
| Duty cycle | | 100% |
| Protection class | | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

| Electrical data – With CPX terminal | | |
|---|--------|--|
| Power supply for electronics ($U_{EL/SEN}$) | | |
| Operating voltage | [V DC] | 24 ±10% |
| Max. intrinsic current consumption at 24 V DC | [mA] | 20 |
| Duty cycle | | 100% |
| Load voltage supply for valves (U_{val}) | | |
| Operating voltage | [V DC] | 24 ±10% |
| Diagnostic message undervoltage U_{OFF} , load voltage outside function range | [V] | 21.6 ... 21.5 |
| Protection class | | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

| Materials | |
|---|------------------------|
| Manifold sub-base | Die-cast aluminium |
| Valve | Die-cast aluminium, PA |
| Seals | FPM, NBR, HNBR |
| Supply plate | Die-cast aluminium |
| Right-hand end plate | Die-cast aluminium |
| Pneumatic interface for CPX | Die-cast aluminium |
| Flow control plate | Die-cast aluminium |
| Pressure regulator plate | Die-cast aluminium, PA |
| Multi-pin connection block | Die-cast aluminium |
| Cover for the pneumatic interface and multi-pin plug connection | PA |
| Note on materials | RoHS-compliant |

**New**Vertical pressure shut-off plate,
key-operated**FESTO**

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

| Product weight | | | | |
|---|-------|-------|-------|-------|
| Approx. weight | [g] | | | |
| Width | 18 mm | 26 mm | 42 mm | 52 mm |
| Multi-pin node with Sub-D or terminal strip ¹⁾ | 550 | | | |
| Multi-pin node with M12 individual connection | 760 | | | |
| Pneumatic interface CPX ¹⁾ | 1470 | | | |
| Electrical connection for AS-Interface | 300 | | | |
| AS-Interface module | 850 | | | |
| Supply plate ²⁾ | | | | |
| • Exhaust plate with 3 and 5 common | 617 | | | |
| • Exhaust port cover with 3 and 5 separated | 597 | | | |
| Right-hand end plate ³⁾ | | | | |
| – With threaded connections | 339 | | | 336 |
| – Selector | 281 | | | – |
| Manifold sub-base ⁴⁾ | 447 | 634 | 340 | 815 |
| 90° connection plate ³⁾ | 170 | 230 | 176 | 359 |
| Pressure regulator plate for port 1 (P) | 350 | 402 | 640 | 1190 |
| for port 4 or 2 (A or B) | 367 | 448 | 640 | 1230 |
| for ports 4 and 2 (A/B) | 611 | 692 | 920 | 1990 |
| Flow control plate | 228 | 320 | 220 | 565 |
| Vertical supply plate ³⁾ | 140 | 191 | 340 | 605 |
| Vertical pressure shut-off plate | 209 | 273 | 600 | 1030 |
| Vertical pressure shut-off plate (key-operated) | 231 | 290 | – | – |
| Valves → Solenoid valves, widths | | | | |
| Blanking plate | 34 | 73 | 68 | 146 |

1) With sheet metal seal, printed circuit board

2) With sheet metal seal and electrical interlinking module

3) With screws

4) With sheet metal seal, electrical interlinking module, inscription label holder, 4 screws

Valve terminal VTSA/VTSA-F


Technical data – Valve terminal

FESTO

Dimensions

Download CAD data → www.festo.com

Valve terminal with individual electrical connection

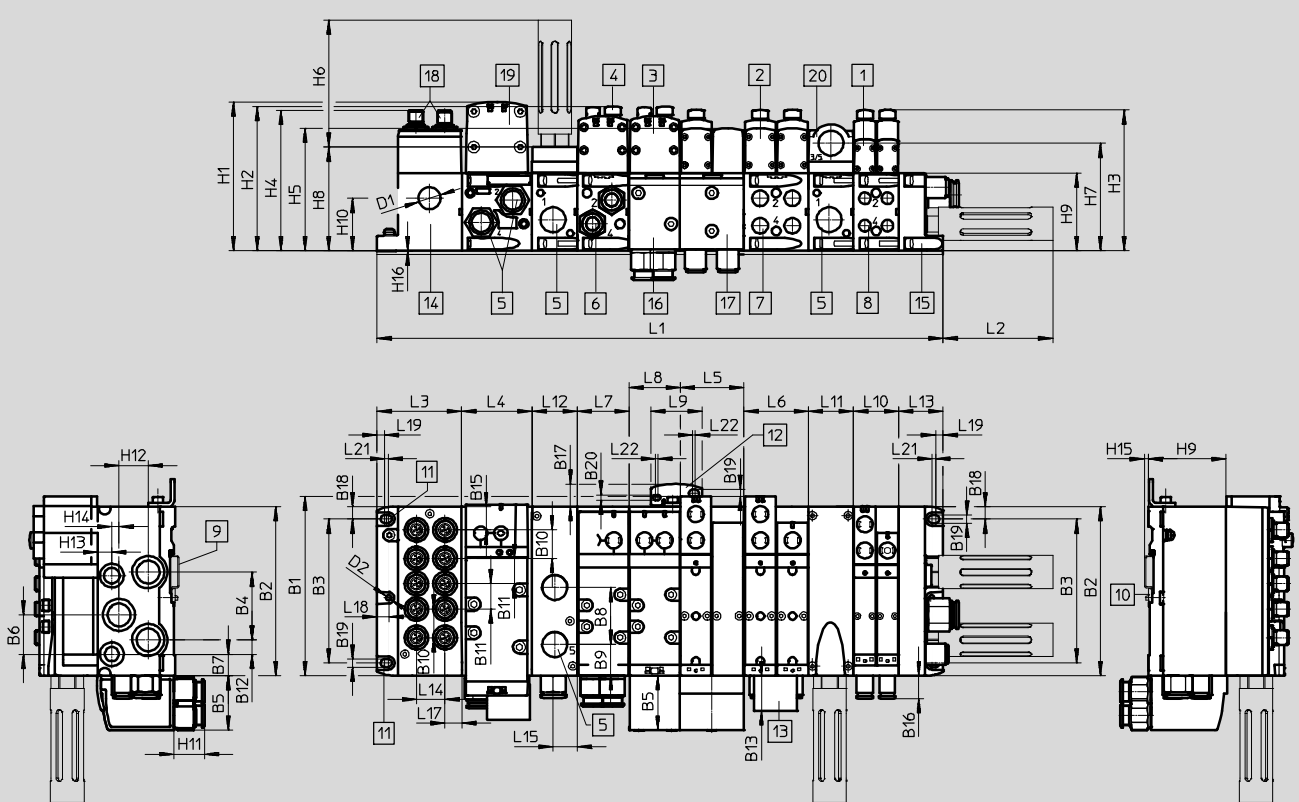

- | | | | |
|---------------------------------------|---------------------------------------|--|---|
| 1 Solenoid valve, width 18 mm | 7 Threaded connection G $\frac{1}{4}$ | 16 90° connection plate 43 mm, G $\frac{3}{8}$ | n02 Number of manifold sub-bases 38 mm |
| 2 Solenoid valve, width 26 mm | 8 Threaded connection G $\frac{1}{8}$ | 17 90° connection plate 54 mm, G $\frac{1}{4}$ | n01 Number of manifold sub-bases 54 mm |
| 3 Solenoid valve, width 42 mm | 9 H-rail | 18 M12 plug, 5-pin (6-way or 10-way) | n1 Number of manifold sub-bases 43 mm |
| 4 Cover cap/manual override | 10 H-rail mounting | 19 Solenoid valve, width 52 mm | n2 Number of manifold sub-bases 59 mm |
| 5 Threaded connection G $\frac{1}{2}$ | 11 Mounting hole | 20 Supply plate | n Number of supply plates (only with end plate with pilot air selector) |
| 6 Threaded connection G $\frac{3}{8}$ | 12 Additional mounting bracket | | |
| | 13 Inscription label holder | | |
| | 14 Individual connection | | |
| | 15 End plate | | |

| Dim. | B1 | B2 | B3 | B4 | B5 | B6 | B7 | B8 | B9 | B10 | B11 | B12 | B13 | B14 | B15 | B16 | B17 | B18 | B19 | B20 |
|------|-------|-----|-----|----|----|----|----|----|----|-----|------|-----|------|-----|------|------|-----|------|-----|-----|
| [mm] | 150.5 | 142 | 121 | 57 | 46 | 33 | 18 | 48 | 26 | 24 | 21.3 | 12 | 29.6 | 23 | 19.6 | 19.5 | 19 | 10.5 | 6.6 | 4.5 |

| Dim. | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12 | L13 | L14 | L15 | L16 | L17 | L18 | L19 |
|------|------|------|-------|--------|----|-------|----|------|--------|------|-----|------|-----|------|-----|------|-----|-----|
| [mm] | 92.4 | 71.3 | n2x59 | n01x54 | 54 | n1x43 | 43 | 43.5 | n02x38 | nx38 | 38 | 37.3 | 24 | 20.5 | 20 | 14.1 | 9.8 | 6.3 |

| Dim. | L20 | L21 | L22 | D1∅ | D2∅ | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 | H9 | H10 | H11 | H12 | H13 | H14 | H15 | H16 |
|------|-----|-----|-----|------|-----|-----|-------|-------|-----|-----|-------|------|----|----|-----|------|------|-----|-----|-----|-----|
| [mm] | 5.5 | 3 | 2 | 18.5 | 4.5 | 125 | 121.3 | 118.2 | 118 | 103 | 107.8 | 90.3 | 87 | 65 | 44 | 25.7 | 24.5 | 12 | 6 | 3.5 | 0.5 |

| Width | L1 |
|--|---|
| 18 mm | $71.3 + n02 \times 38 + n \times 38 + 37.3$ |
| 26 mm | $71.3 + n01 \times 54 + n \times 38 + 37.3$ |
| 42 mm | $71.3 + n1 \times 43 + n \times 38 + 37.3$ |
| 52 mm | $71.3 + n2 \times 59 + n \times 38 + 37.3$ |
| Mixture of 18 mm, 26 mm, 42 mm and 52 mm | $71.3 + n02 \times 38 + n01 \times 54 + n1 \times 43 + n2 \times 59 + n \times 38 + 37.3$ |

– Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

Dimensions

Download CAD data → www.festo.com

Valve terminal with multi-pin plug connection

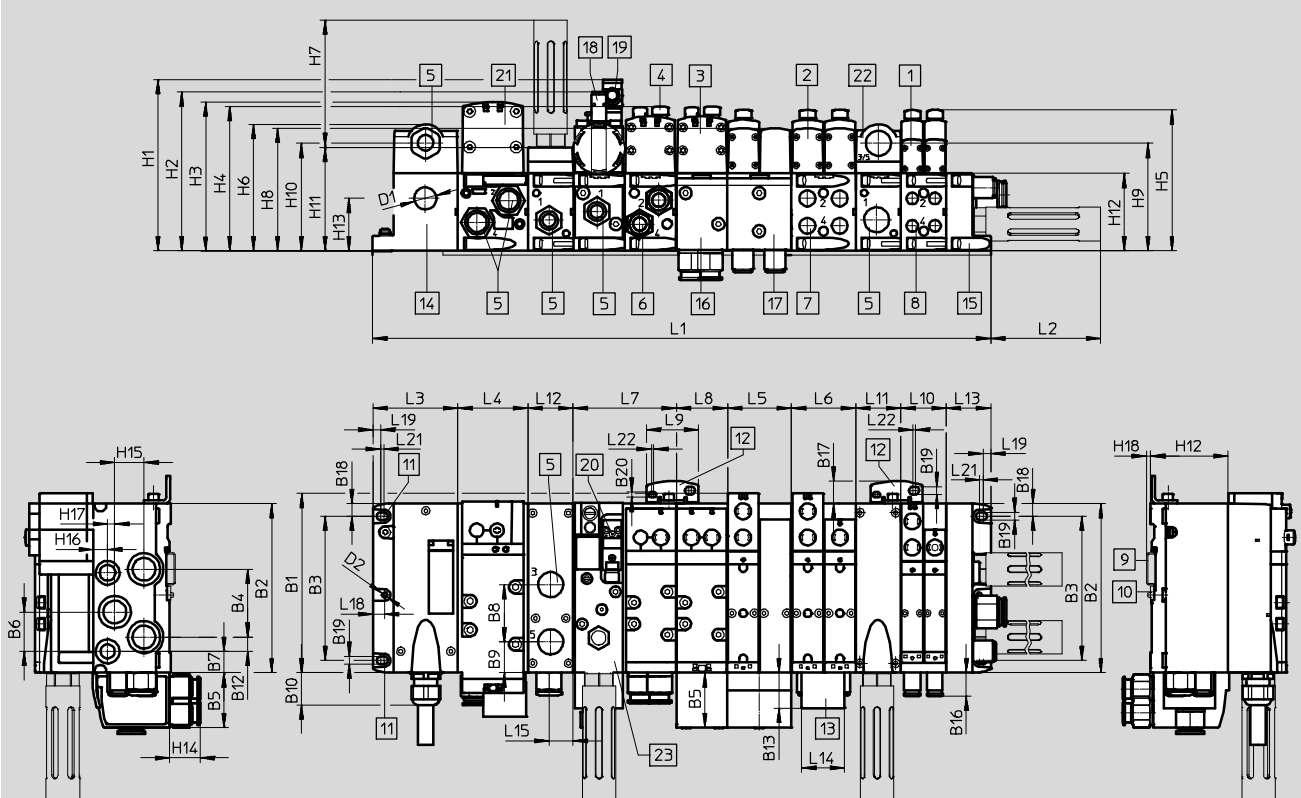

- | | | | |
|---------------------------------------|--|---|---|
| 1 Solenoid valve, width 18 mm | 9 H-rail | 17 90° connection plate 54 mm, G $\frac{1}{4}$ | n02 Number of manifold sub-bases 38 mm |
| 2 Solenoid valve, width 26 mm | 10 H-rail mounting | 18 Proximity sensor M12x1 | n01 Number of manifold sub-bases 54 mm |
| 3 Solenoid valve, width 42 mm | 11 Mounting hole | 19 Plug socket M12x1 | n1 Number of manifold sub-bases 43 mm |
| 4 Cover cap/manual override | 12 Additional mounting bracket | 20 Electrical connection to EN 175301-803, type C | n2 Number of manifold sub-bases 59 mm |
| 5 Threaded connection G $\frac{1}{2}$ | 13 Inscription label holder | 21 Solenoid valve, width 52 mm | n Number of supply plates (only with end plate with pilot air selector) |
| 6 Threaded connection G $\frac{3}{8}$ | 14 Multi-pin plug connection | 22 Supply plate | |
| 7 Threaded connection G $\frac{1}{4}$ | 15 End plate | 23 Soft-start valve | |
| 8 Threaded connection G $\frac{1}{8}$ | 16 90° connection plate 43 mm, G $\frac{3}{8}$ | | |

| Dim. | B1 | B2 | B3 | B4 | B5 | B6 | B7 | B8 | B9 | B10 | B11 | B12 | B13 | B14 | B16 | B17 | B18 | B19 | B20 |
|------|-------|-----|-----|----|----|----|----|----|----|-----|-----|-----|------|-----|------|-----|------|-----|-----|
| [mm] | 150.5 | 142 | 121 | 57 | 46 | 33 | 18 | 48 | 26 | 27 | 2 | 12 | 29.6 | 23 | 19.5 | 19 | 10.5 | 6.6 | 4.5 |

| Dim. | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12 | L13 | L14 | L15 | L16 | L18 | L19 | L20 | L21 |
|------|------|------|-------|--------|----|-------|----|------|--------|------|-----|------|-----|------|-----|-----|-----|-----|-----|
| [mm] | 92.4 | 71.3 | n2x59 | n01x54 | 54 | n1x43 | 43 | 43.5 | n02x38 | nx38 | 38 | 37.3 | 36 | 20.5 | 20 | 9.8 | 6.3 | 5.5 | 3 |

| Dim. | L22 | D1Ø | D2Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 | H9 | H10 | H11 | H12 | H13 | H14 | H15 | H16 | H17 | H18 |
|------|-----|------|-----|-------|-------|-----|-------|-------|-------|-------|-----|------|------|-----|-----|-----|------|------|-----|-----|-----|
| [mm] | 2 | 18.5 | 4.5 | 143.9 | 133.3 | 125 | 121.3 | 118.2 | 106.3 | 107.8 | 103 | 90.3 | 90.3 | 87 | 65 | 44 | 25.7 | 24.5 | 12 | 6 | 3.5 |

| Width | L1 |
|--|--|
| 18 mm | 71.3 + n02 x 38 + n x 38 + 37.3 |
| 26 mm | 71.3 + n01 x 54 + n x 38 + 37.3 |
| 42 mm | 71.3 + n1 x 43 + n x 38 + 37.3 |
| 52 mm | 71.3 + n2 x 59 + n x 38 + 37.3 |
| Mixture of 18 mm, 26 mm, 42 mm and 52 mm | 71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 + n x 38 + 37.3 |

– Note: This product conforms to ISO 1179-1 and to ISO 228-1

Valve terminal VTSA/VTSA-F

Technical data – Valve terminal





Dimensions

Download CAD data → www.festo.com

Multi-pin, terminal strip (CageClamp®), VABE-S6-1LF-C-M1-C...

Multi-pin, round plug connector, VABE-S6-1LF-C-M1-R...

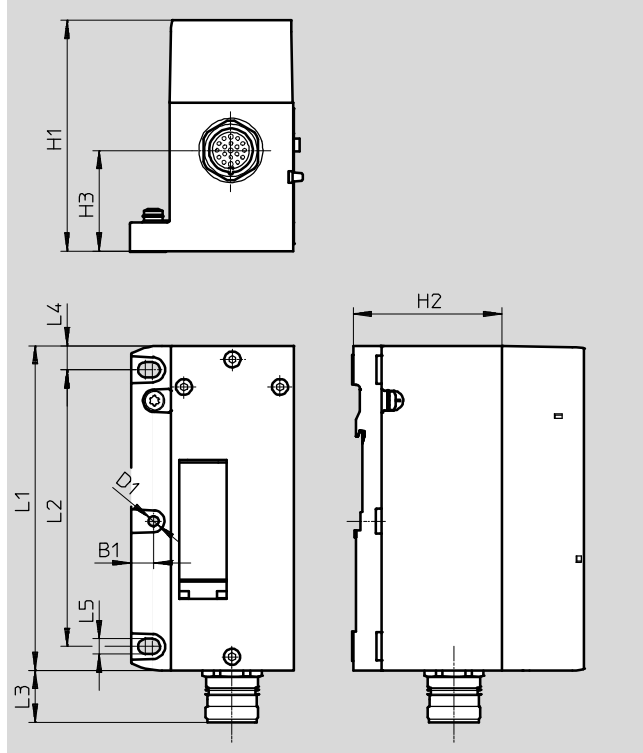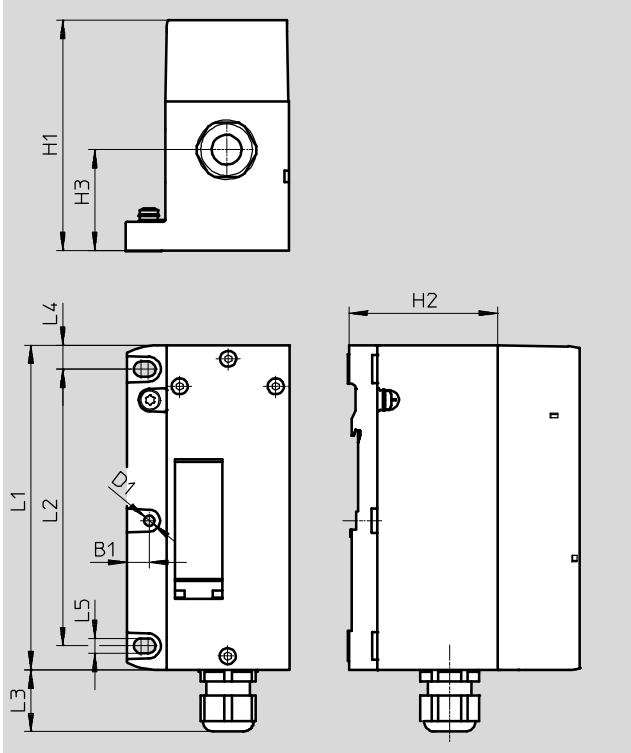

| Type | H1 | H2 | H3 | D1Ø | L1 | L2 | L3 | L4 | L5 | B1 |
|-----------------------|-------|----|----|-----|-----|-----|----|------|-----|-----|
| VABE-S6-1LF-C-M1-C... | 106.1 | 65 | 44 | 4.5 | 142 | 121 | 27 | 10.5 | 6.6 | 9.8 |
| VABE-S6-1LF-C-M1-R... | 101 | 65 | 44 | 4.5 | 142 | 121 | 23 | 10.5 | 6.6 | 9.8 |


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

Dimensions

Download CAD data → www.festo.com

Valve terminal with AS-Interface connection

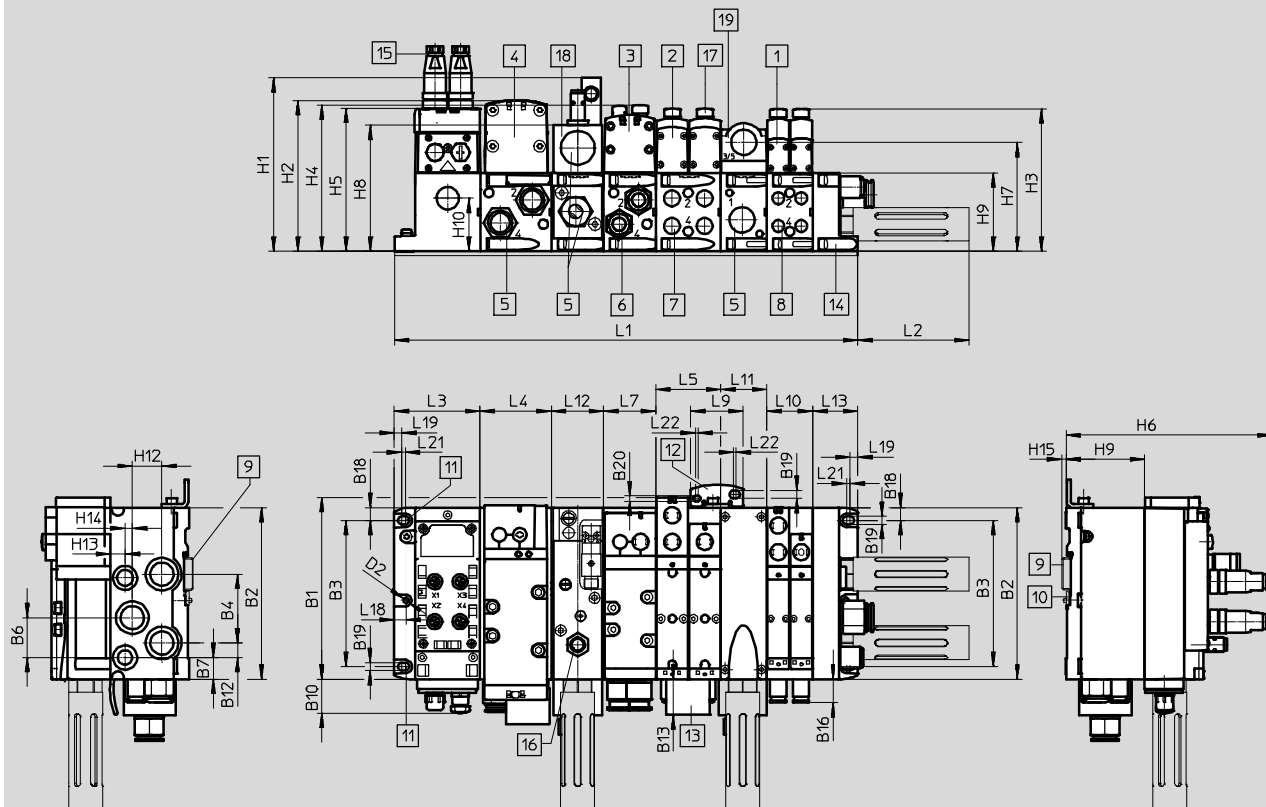

- | | | | |
|---------------------------------------|---------------------------------------|----------------------------------|--|
| 1 Solenoid valve, width 18 mm | 7 Threaded connection G $\frac{1}{4}$ | 16 Proximity sensor M12x1 | n02 Number of manifold sub-bases 38 mm |
| 2 Solenoid valve, width 26 mm | 8 Threaded connection G $\frac{1}{8}$ | 17 Cover cap/manual override | n01 Number of manifold sub-bases 54 mm |
| 3 Solenoid valve, width 42 mm | 9 H-rail | 18 Soft-start valve, width 43 mm | n1 Number of manifold sub-bases 43 mm |
| 4 Solenoid valve, width 52 mm | 10 H-rail mounting | 19 Supply plate | n2 Number of manifold sub-bases 59 mm |
| 5 Threaded connection G $\frac{1}{2}$ | 11 Mounting hole | | n Number of supply plates |
| 6 Threaded connection G $\frac{3}{8}$ | 12 Additional mounting bracket | | |
| | 13 Inscription label | | |
| | 14 End plate | | |
| | 15 Plug M12 | | |

| Dim. | B1 | B2 | B3 | B4 | B6 | B7 | B10 | B12 | B13 | B14 | B16 | B18 | B19 | B20 |
|------|-------|-----|-----|----|----|----|-----|-----|------|-----|------|------|-----|-----|
| [mm] | 150.5 | 142 | 121 | 57 | 33 | 18 | 28 | 12 | 29.6 | 23 | 19.5 | 10.5 | 6.6 | 4.5 |

| Dim. | L2 | L3 | L4 | L5 | L7 | L9 | L10 | L11 | L12 | L13 | L16 | L18 | L19 | L20 | L21 |
|------|------|------|-------|--------|-------|------|--------|------|-----|------|-----|-----|-----|-----|-----|
| [mm] | 92.4 | 71.3 | n2x59 | n01x54 | n1x43 | 43.5 | n02x38 | nx38 | 43 | 37.3 | 20 | 9.8 | 6.3 | 5.5 | 3 |

| Dim. | L22 | D2 \varnothing | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 | H9 | H10 | H12 | H13 | H14 | H15 |
|------|-----|------------------|-------|-----|-------|-------|-------|-----|------|-------|----|-----|------|-----|-----|-----|
| [mm] | 2 | 4.5 | 143.9 | 125 | 118.2 | 121.3 | 118.6 | 171 | 90.3 | 104.5 | 65 | 44 | 24.5 | 12 | 6 | 3.5 |

| Width | L1 |
|--|---|
| 18 mm | $71.3 + n02 \times 38 + n \times 38 + 37.3$ |
| 26 mm | $71.3 + n01 \times 54 + n \times 38 + 37.3$ |
| 42 mm | $71.3 + n1 \times 43 + n \times 38 + 37.3$ |
| 52 mm | $71.3 + n2 \times 59 + n \times 38 + 37.3$ |
| Mixture of 18 mm, 26 mm, 42 mm and 52 mm | $71.3 + n02 \times 38 + n01 \times 54 + n1 \times 43 + n2 \times 59 + n \times 38 + 37.3$ |

Valve terminal VTSA/VTSA-F


Technical data – Valve terminal



Dimensions

Download CAD data → www.festo.com

Valve terminal with fieldbus connection

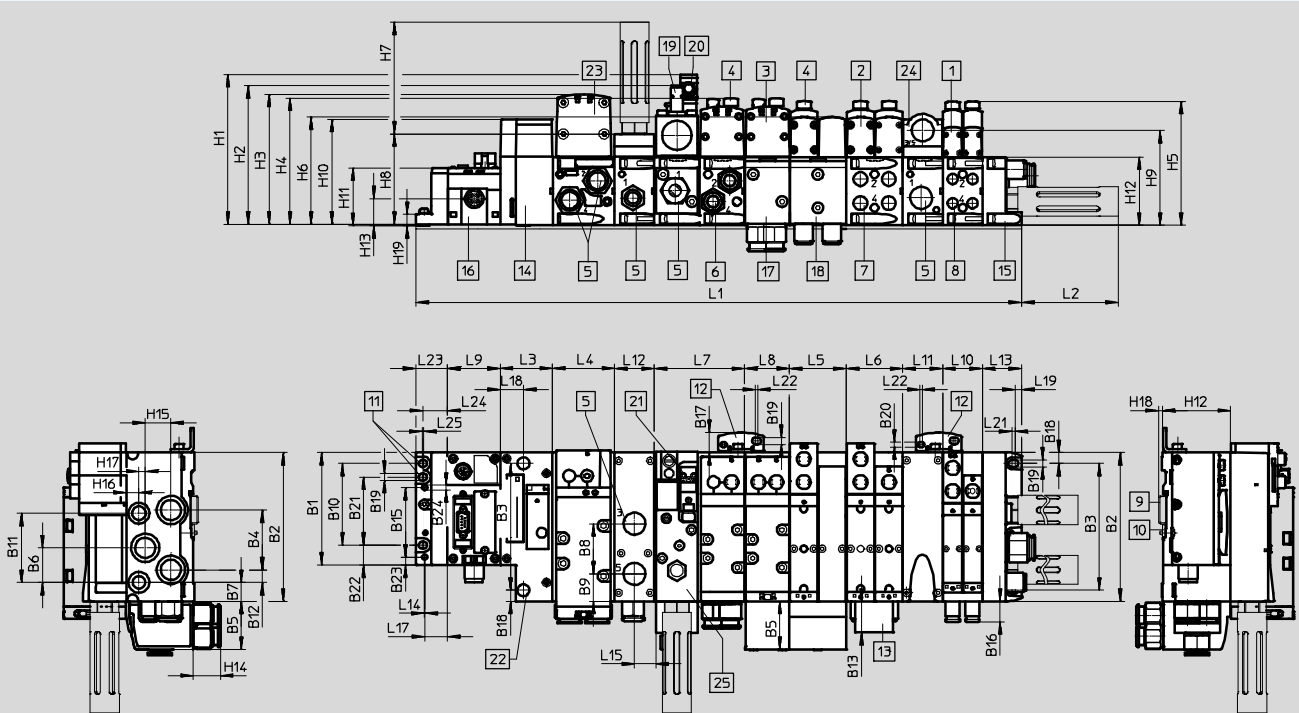

- | | | | |
|-------------------------------|-------------------------------------|---|---|
| 1 Solenoid valve, width 18 mm | 10 H-rail mounting | 20 Plug socket M12x1 | n02 Number of manifold sub-bases 38 mm |
| 2 Solenoid valve, width 26 mm | 11 Mounting hole | 21 Electrical connection to EN 175301-803, type C | n01 Number of manifold sub-bases 54 mm |
| 3 Solenoid valve, width 42 mm | 12 Additional mounting bracket | 22 Hole for additional mounting, diameter 6.4 2x | n1 Number of manifold sub-bases 43 mm |
| 4 Cover cap/manual override | 13 Inscription label holder | 23 Solenoid valve, width 52 mm | n2 Number of manifold sub-bases 59 mm |
| 5 Threaded connection G½ | 14 Pneumatic interface CPX | 24 Supply plate | n Number of supply plates (only with end plate with pilot air selector) |
| 6 Threaded connection G3/8 | 15 End plate | 25 Soft-start valve | m Number of CPX modules |
| 7 Threaded connection G¼ | 16 CPX module/fieldbus node | | |
| 8 Threaded connection G1/8 | 17 90° connection plate 43 mm, G3/8 | | |
| 9 H-rail | 18 90° connection plate 54 mm, G¼ | | |
| | 19 Proximity sensor M12x1 | | |

| Dim. | B1 | B2 | B3 | B4 | B5 | B6 | B7 | B8 | B9 | B10 | B11 | B12 | B13 | B14 | B16 | B18 | B19 | B20 | B21 | B22 | B23 | B24 |
|------|-------|-----|-----|----|----|----|----|----|----|-----|-----|-----|------|-----|------|------|-----|-----|-----|------|-----|-----|
| [mm] | 107.3 | 142 | 121 | 57 | 46 | 33 | 18 | 48 | 26 | 78 | 66 | 12 | 29.6 | 23 | 19.5 | 10.5 | 6.6 | 4.5 | 65 | 18.9 | 7.5 | 4.4 |

| Dim. | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12 | L13 | L14 | L15 | L16 | L17 | L18 | L19 | L20 | L21 | L22 |
|------|------|----|-------|--------|----|-------|----|--------|--------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|-----|
| [mm] | 92.4 | 50 | n2x59 | n01x54 | 54 | n1x43 | 43 | mx20.1 | n02x38 | nx38 | 38 | 37.3 | 1 | 20.5 | 20 | 22 | 22 | 6.3 | 5.5 | 3 | 2 |

| Dim. | L23 | L24 | L25 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 | H9 | H10 | H11 | H12 | H13 | H14 | H15 | H16 | H17 | H18 | H19 |
|------|------|------|-----|-------|-------|-----|-------|-------|-----|-------|----|------|-------|------|-----|------|------|------|-----|-----|-----|------|
| [mm] | 30.4 | 23.7 | 1.5 | 143.9 | 133.3 | 125 | 121.3 | 118.2 | 103 | 106.8 | 87 | 90.3 | 101.4 | 55.1 | 65 | 25.8 | 25.7 | 24.5 | 12 | 6 | 3.5 | 10.8 |

| Width | L1 |
|--|--|
| 18 mm | $30.4 + m \times 50.1 + 50 + n02 \times 38 + n \times 38 + 37.3$ |
| 26 mm | $30.4 + m \times 50.1 + 50 + n01 \times 54 + n \times 38 + 37.3$ |
| 42 mm | $30.4 + m \times 50.1 + 50 + n1 \times 43 + n \times 38 + 37.3$ |
| 52 mm | $30.4 + m \times 50.1 + 50 + n2 \times 59 + n \times 38 + 37.3$ |
| Mixture of 18 mm, 26 mm, 42 mm and 52 mm | $30.4 + m \times 50.1 + 50 + n02 \times 38 + n01 \times 54 + n1 \times 43 + n2 \times 59 + n \times 38 + 37.3$ |

– Note: This product conforms to ISO 1179-1 and to ISO 228-1



New

Vertical pressure shut-off plate,
key-operated

FESTO


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

Dimensions


Download CAD data → www.festo.com

Vertical stacking components, width 18 mm

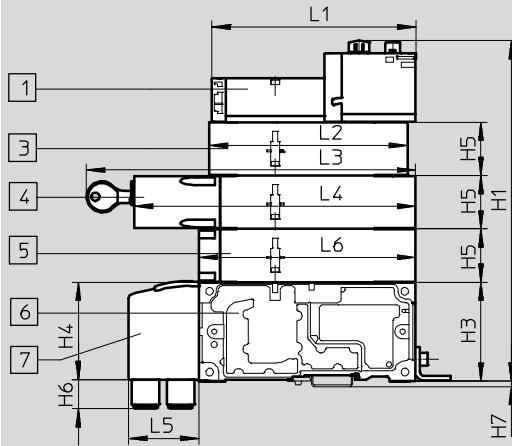

- 1 Solenoid valve with two solenoid coils, width 18 mm
- 3 Flow control plate
- 4 Vertical pressure shut-off plate, can be shut-off (code ZT), optionally key-operated (code ZS)
- 5 Vertical supply plate
- 6 Manifold sub-base
- 7 90° connection plate


| Dim. | L1 | L2 | L3 (Code ZT) | L4 (Code ZT) | L3 (Code ZS) | L4 (Code ZS) | L5 | L6 | H1 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-----|-----------------|-----------------|-----------------|-----------------|----|-----|-----|----|----|----|----|-----|
| [mm] | 133.8 | 130 | - | 184.1 | 222.3 | 198.3 | 46 | 142 | 224 | 65 | 64 | 35 | 19 | 3.5 |

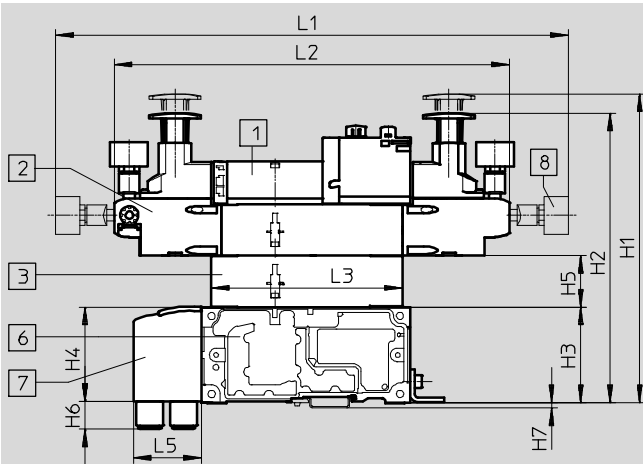

- 1 Solenoid valve with two solenoid coils, width 18 mm
- 2 Pressure regulator plate
- 3 Flow control plate
- 6 Manifold sub-base
- 7 90° connection plate
- 8 Pressure gauge, freely positionable

| Dim. | L1 | L2 | L3 | L5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-------|-----|----|-----|-----|----|----|----|----|-----|
| [mm] | 348.2 | 268.6 | 130 | 46 | 210 | 197 | 65 | 64 | 35 | 19 | 3.5 |

Vertical stacking components, width 18 mm, with the pressure regulator plate also suitable for valves with symmetrical coil layout

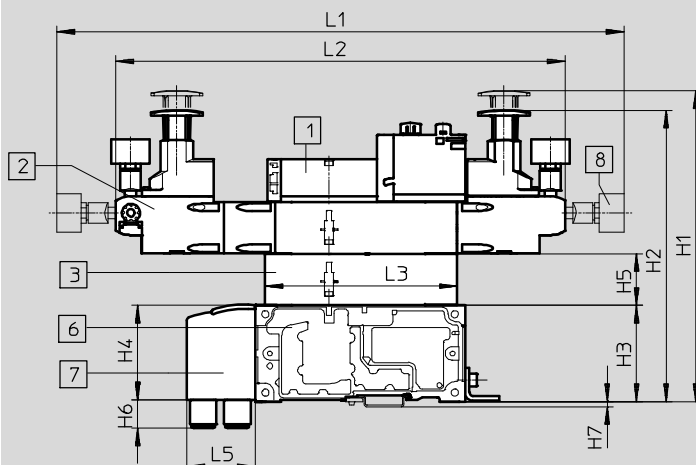

- 1 Solenoid valve with two solenoid coils, width 18 mm
- 2 Pressure regulator plate
- 3 Flow control plate
- 6 Manifold sub-base
- 7 90° connection plate
- 8 Pressure gauge, freely positionable

| Dim. | L1 | L2 | L3 | L5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-------|-----|----|-----|-----|----|----|----|----|-----|
| [mm] | 383.2 | 303.6 | 130 | 46 | 210 | 197 | 65 | 64 | 35 | 19 | 3.5 |


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

Dimensions


Download CAD data → www.festo.com

Vertical stacking components, width 26 mm

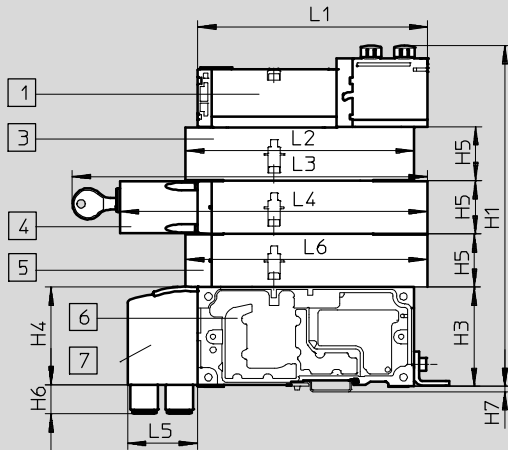

- 1 Solenoid valve with two solenoid coils, width 26 mm
- 3 Flow control plate
- 4 Vertical pressure shut-off plate, can be shut-off (code ZT), optionally key-operated (code ZS)
- 5 Vertical supply plate
- 6 Manifold sub-base
- 7 90° connection plate


| Dim. | L1 | L2 | L3 (Code ZT) | L4 (Code ZT) | L3 (Code ZS) | L4 (Code ZS) | L5 | L6 | H1 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-----|-----------------|-----------------|-----------------|-----------------|----|-------|-----|----|----|----|----|-----|
| [mm] | 150.8 | 150 | - | 201.4 | 239.5 | 215.5 | 46 | 158.5 | 224 | 65 | 64 | 35 | 19 | 3.5 |

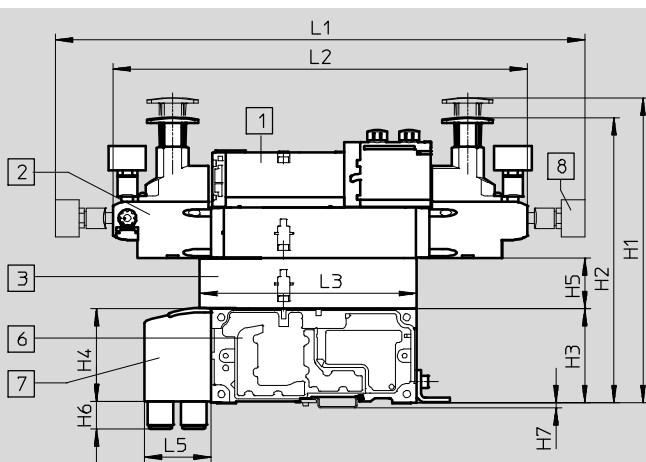

- 1 Solenoid valve with two solenoid coils, width 26 mm
- 2 Pressure regulator plate
- 3 Flow control plate
- 6 Manifold sub-base
- 7 90° connection plate
- 8 Pressure gauge, freely positionable

| Dim. | L1 | L2 | L3 | L5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-------|-----|----|-----|-----|----|----|----|----|-----|
| [mm] | 365.7 | 286.1 | 150 | 46 | 210 | 197 | 65 | 64 | 35 | 19 | 3.5 |

Vertical stacking components, width 26 mm, with the pressure regulator plate also suitable for valves with symmetrical coil layout

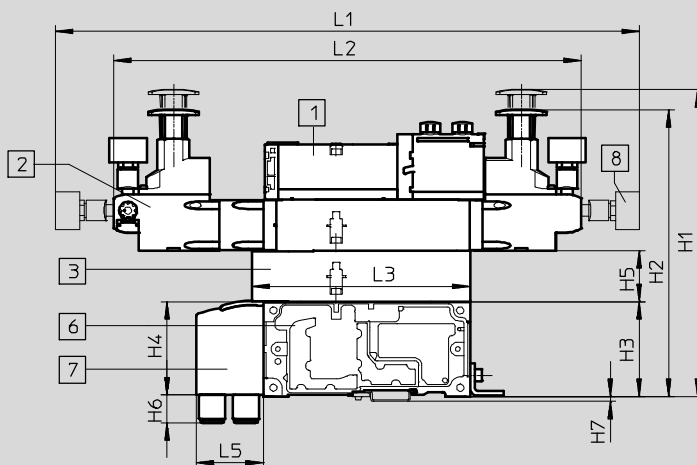

- 1 Solenoid valve with two solenoid coils, width 26 mm
- 2 Pressure regulator plate
- 3 Flow control plate
- 6 Manifold sub-base
- 7 90° connection plate
- 8 Pressure gauge, freely positionable

| Dim. | L1 | L2 | L3 | L5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|------|-------|-------|-----|----|-----|-----|----|----|----|----|-----|
| [mm] | 400.7 | 321.1 | 150 | 46 | 210 | 197 | 65 | 64 | 35 | 19 | 3.5 |


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal


Dimensions

Download CAD data → www.festo.com

Vertical stacking components, width 42 mm

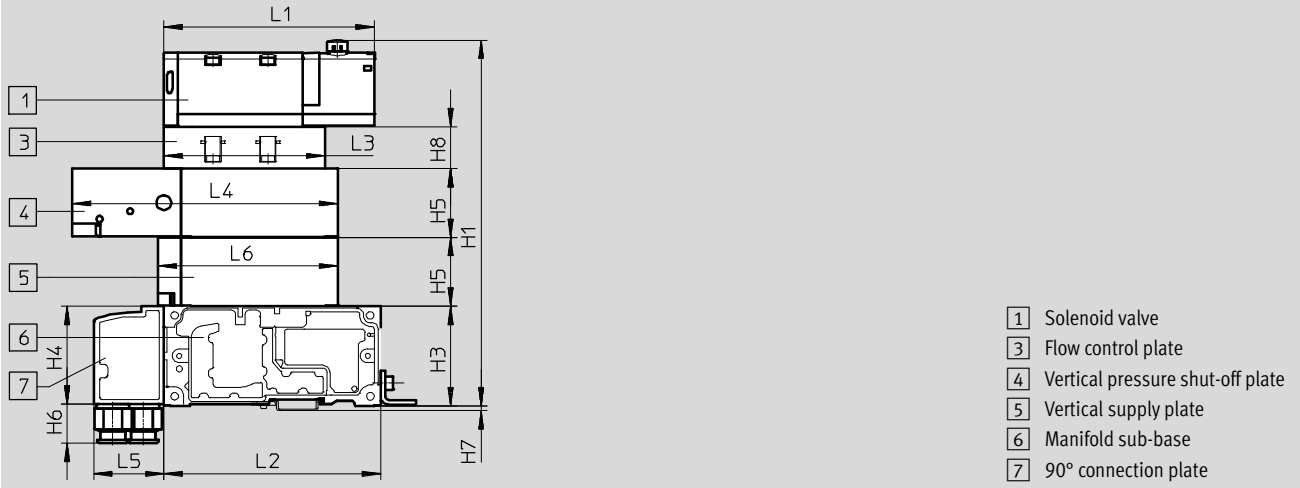

| Dim. | L1 | L2 | L3 | L4 | L5 | L6 | H1 | H3 | H4 | H5 | H6 | H7 | H8 |
|------|-------|-----|-------|-------|----|-------|-----|----|----|------|------|-----|----|
| [mm] | 137.8 | 142 | 105.3 | 173.8 | 46 | 117.6 | 236 | 65 | 64 | 45.3 | 25.7 | 3.5 | 28 |

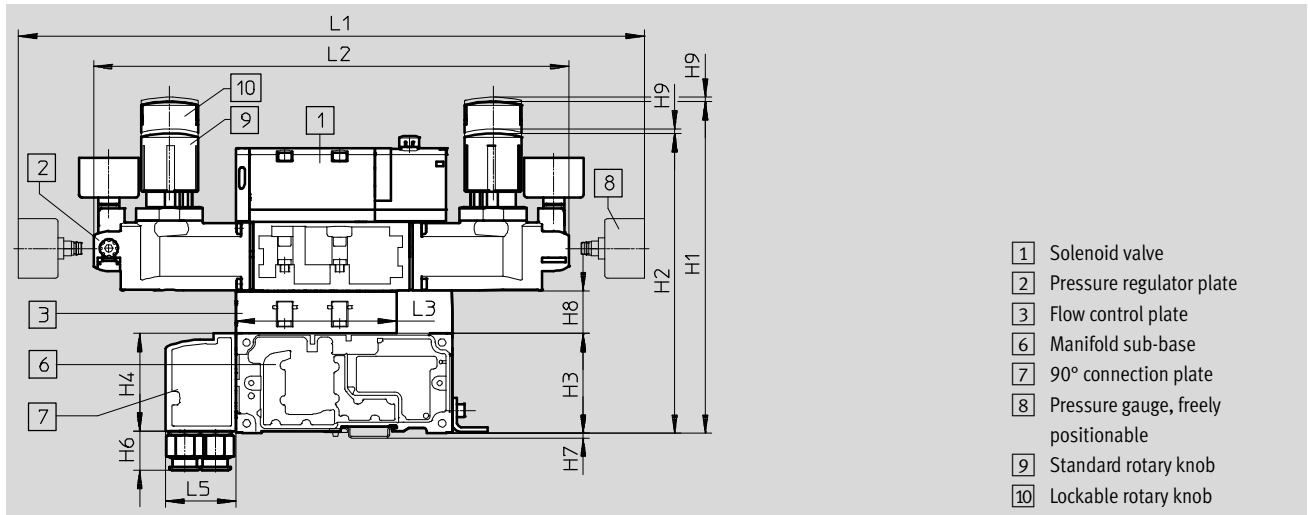

| Dim. | L1 | L2 | L3 | L5 | H1 | H2 | H3 | H4 | H6 | H7 | H8 | H9 |
|------|-------|-------|-------|----|-------|-------|----|----|------|-----|----|----|
| [mm] | 410.3 | 311.6 | 105.3 | 46 | 220.7 | 196.1 | 65 | 64 | 25.7 | 3.5 | 28 | 3 |

Note

Pressure regulator plates for valves with symmetrical coil layout with widths of 42 mm and 52 mm can

only be ordered via the pressure regulator configurator VABF-S2.
 → Internet: vabf-s2

Valve terminal VTSA/VTSA-F


Technical data – Valve terminal



Dimensions


Download CAD data → www.festo.com

Vertical stacking components, width 52 mm

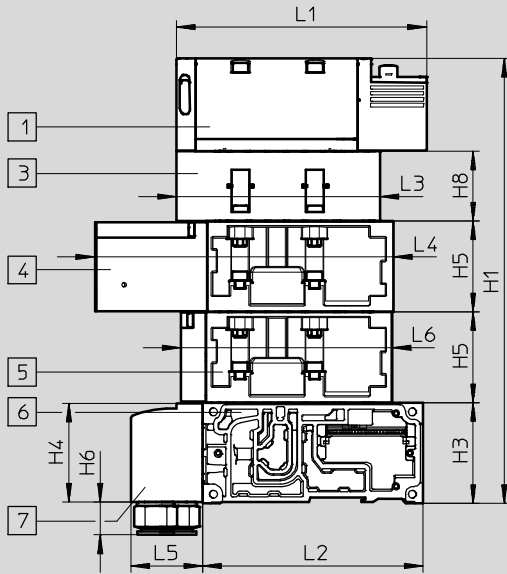

- 1 Solenoid valve
- 3 Flow control plate
- 4 Vertical pressure shut-off plate
- 5 Vertical supply plate
- 6 Manifold sub-base
- 7 90° connection plate

| Dim. | L1 | L2 | L3 | L4 | L5 | L6 | H1 | H3 | H4 | H5 | H6 | H8 |
|------|-------|-----|-----|-------|----|-----|-------|----|------|------|------|----|
| [mm] | 160.7 | 142 | 131 | 191.2 | 46 | 136 | 287.4 | 65 | 63.5 | 58.7 | 21.2 | 45 |

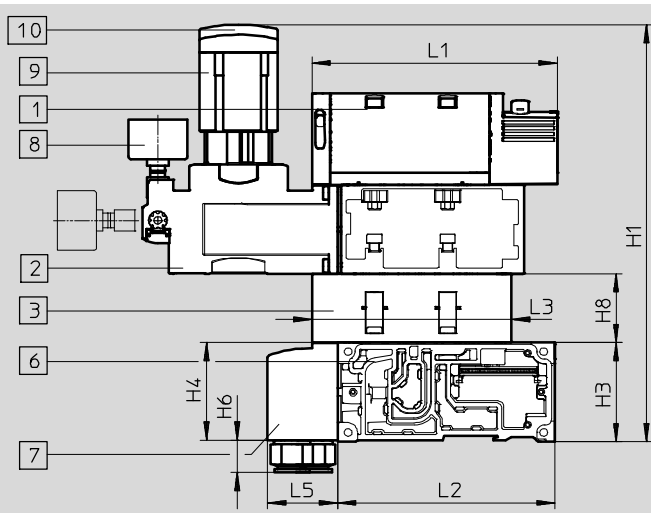

- 1 Solenoid valve
- 2 Pressure regulator plate
- 3 Flow control plate
- 6 Manifold sub-base
- 7 90° connection plate
- 8 Pressure gauge, freely positionable
- 9 Standard rotary knob
- 10 Lockable rotary knob

| Dim. | L1 | L2 | L3 | L5 | H1 | H3 | H4 | H6 | H8 |
|------|-------|-----|-----|----|-----|------|------|------|------|
| [mm] | 160.7 | 142 | 131 | 46 | 278 | 32.5 | 63.5 | 21.2 | 22.5 |

- - Note

Pressure regulator plates for valves with symmetrical coil layout with widths of 42 mm and 52 mm can

only be ordered via the pressure regulator configurator VABF-S2.
→ Internet: vabf-s2


Valve terminal VTSA/VTSA-F

Technical data – Valve terminal

Dimensions

Download CAD data → www.festo.com


Supply plate with silencer

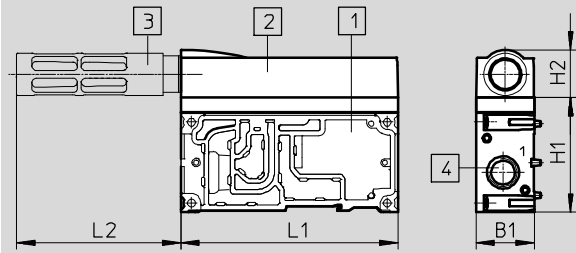

- 1 Supply plate
- 2 Exhaust port cover
- 3 Silencer U-1/2-B
- 4 Threaded connection G3/4


| Dim. | L1 | L2 | H1 | H2 | B1 |
|------|-----|-------|----|------|----|
| [mm] | 142 | 107.5 | 75 | 31.5 | 38 |

Right-hand end plate, VABE-S6-1R...

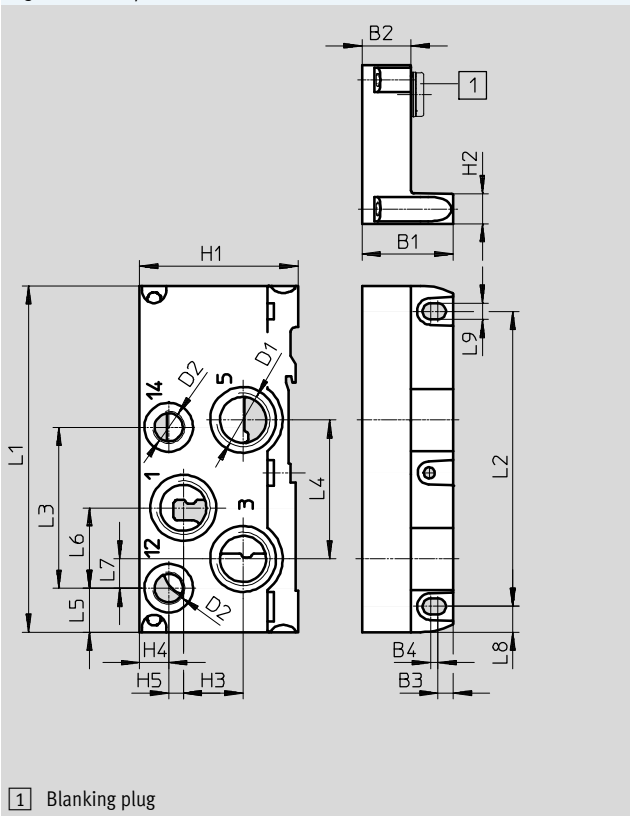

- 1 Blanking plug

Right-hand end plate, VABE-S6-2R...

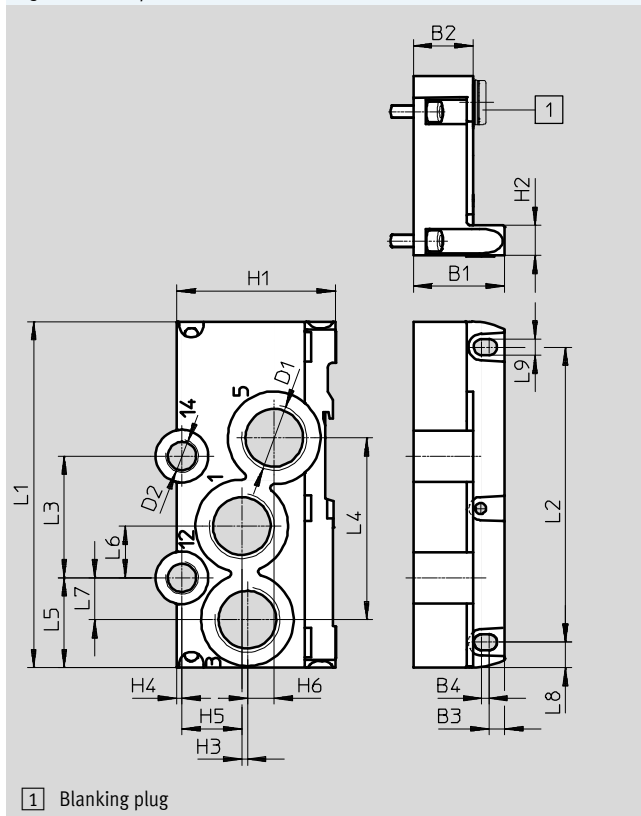

- 1 Blanking plug

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | D1 | D2 | H1 | H2 | H3 | H4 | H5 | H6 | B1 | B2 | B3 | B4 | With ¹⁾ |
|-----------------|-----|-----|------|------|------|------|------|------|-----|------|------|----|------|------|-----|------|----|------|------|-----|----|--------------------|
| VABE-S6-1R-G12 | 142 | 121 | 66 | 57 | 18 | 33 | 12 | 10.5 | 6.6 | G1/2 | G3/4 | 65 | 12.5 | 24.5 | 12 | 6 | - | 37.3 | 22 | 6.3 | 3 | 1 |
| VABE-S6-1RZ-G12 | | | | | | | | | | | | | | | | | | | | | | - |
| VABE-S6-2R-G34 | 142 | 121 | 49.9 | 74.6 | 36.9 | 21.2 | 17.2 | 10.5 | 6.6 | G3/4 | G1/4 | 65 | 12.5 | 2.3 | 2.2 | 24.5 | 11 | 37.3 | 24.5 | 6.3 | 3 | 1 |
| VABE-S6-2RZ-G34 | | | | | | | | | | | | | | | | | | | | | | - |

1) With blanking plug = internal pilot air supply, - without blanking plug = external pilot air supply

- - Note: This product conforms to ISO 1179-1 and to ISO 228-1

Valve terminal VTSA/VTSA-F


Technical data – Valve terminal

FESTO

Dimensions

Download CAD data → www.festo.com

Right-hand end plate with pilot air selector, VABE-S6-1RZ-G-B1

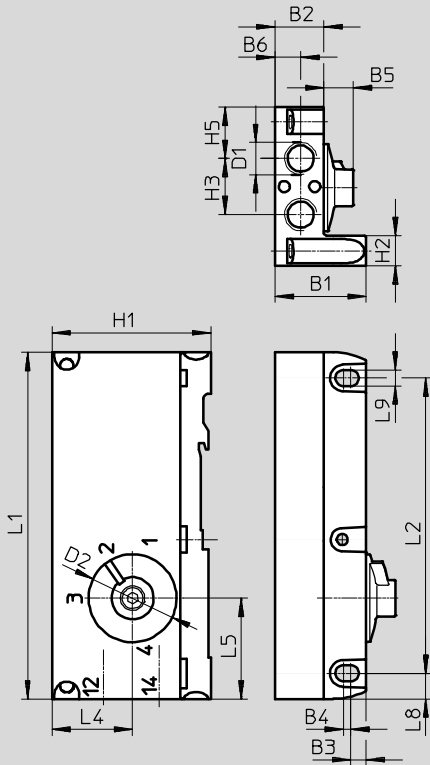




| Type | L1 | L2 | L5 | L8 | L9 | D1 | D2 | H1 | H2 | H3 | H4 | H5 | B1 | B2 | B3 | B4 | B5 | B6 |
|------------------|-----|-----|------|------|-----|------|----|------|------|----|----|----|------|----|-----|----|----|------|
| VABE-S6-1RZ-G-B1 | 142 | 121 | 41.3 | 10.5 | 6.6 | G1/4 | 37 | 65.4 | 12.5 | 23 | 33 | 21 | 37.3 | 20 | 6.3 | 3 | 12 | 10.5 |


• Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Solenoid valves VSVA

-  - Valve width to ISO 15407-2
 - 18 mm
 - 26 mm
-  - Valve width to ISO 5599-2
 - 42 mm (ISO 1)
 - 52 mm (ISO 2)

-  - Voltage
 - 24 V DC
 - 110 V AC

-  - Flow rate¹⁾
 - Width 18 mm: up to 550 (700) l/min
 - Width 26 mm: up to 1100 (1350) l/min
 - Width 42 mm: up to 1300 (1860) l/min
 - Width 52 mm: up to 2900 l/min

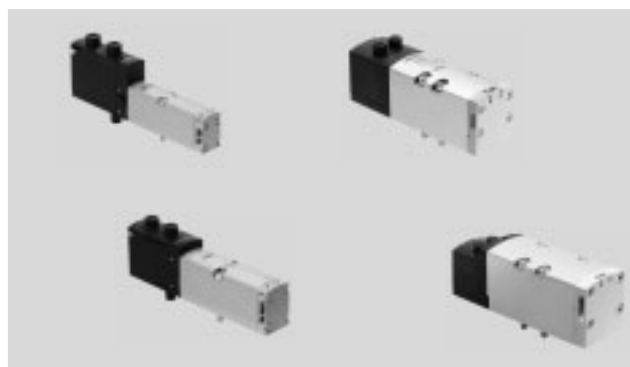

1) Flow rates in brackets apply to VTSA-F

| General technical data - Solenoid valves | | |
|--|---|-------------------------------|
| Design | Piston spool valve | |
| Sealing principle | Soft | |
| Type of reset | Mechanical or pneumatic, depending on type used | |
| Actuation type | Electrical | |
| Electrical connection | Plug to ISO 15407-2, 2-pin (single solenoid types) or 4-pin (double solenoid and 5/3-way types) | |
| Type of control | Piloted | |
| Protection class to EN 60529 | IP65, NEMA 4 (for all types of signal transmission in assembled state) | |
| Exhaust function, with flow control | Via individual sub-base, via flow control plate (not with valve type T22) | |
| Type of mounting | On manifold sub-base, on individual sub-base | |
| Mounting position | Any | |
| Manual override | Detenting, non-detenting, covered | |
| Switching status display | LED (except types with switching status display sensor, and part nos.: 560727 and 560728) | |
| Switching status display sensor | Yellow LED | |
| Duty cycle [%] | 100 | |
| Degree of contamination | 3 | |
| Surge resistance [kV] | 2.5 | |
| Nominal operating voltage | [V DC] | 24 (dependent on valve type) |
| | [AC V] | 110 (dependent on valve type) |
| Permissible voltage fluctuations [%] | ±10 | |
| Pneumatic connections | | |
| Supply port 1 | Via the manifold sub-base of the valve terminal or via individual sub-base | |
| Exhaust port 3/5 | | |
| Working ports 2/4 | | |
| Pilot air supply 12/14 | | |
| Pilot exhaust air port 82/84 | Either ducted or unducted | |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valves

| Pneumatic characteristic data | | | | | | | | | | |
|-------------------------------|------|-------|------|------|------|------|------|------|-------|-------|
| Terminal code | VC | VV | N | C | H | P | Q | R | M | O |
| Valve code | T22C | T22CV | T32U | T32C | T32H | T32F | T32N | T32W | M52-A | M52-M |
| Direction of flow | | | | | | | | | | |
| Any | - | ■ | - | - | - | - | - | - | ■ | ■ |
| Reversible only | - | - | - | - | - | ■ | ■ | ■ | - | - |
| Non-reversible | ■ | - | ■ | ■ | ■ | - | - | - | - | - |
| Reset method | | | | | | | | | | |
| Pneumatic spring | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - |
| Mechanical spring | - | - | - | - | - | - | - | - | - | ■ |

| Pneumatic characteristic data | | | | | | | | | | |
|-------------------------------|-----|-----|------|------|------|-------|-------|-------|-------|------|
| Terminal code | J | D | B | G | E | SA | SB | SD | SE | VG |
| Valve code | B52 | D52 | P53U | P53C | P53E | P53ED | P53AD | P53BD | P53EP | P53F |
| Direction of flow | | | | | | | | | | |
| Any | ■ | ■ | ■ | ■ | ■ | - | ■ | - | - | ■ |
| Reversible only | - | - | - | - | - | - | - | - | - | - |
| Non-reversible | - | - | - | - | - | ■ | - | ■ | ■ | - |
| Reset method | | | | | | | | | | |
| Pneumatic spring | - | - | - | - | - | - | - | - | - | - |
| Mechanical spring | - | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Direction of flow of solenoid valves

- | | |
|---|---|
| <p>Solenoid valves with reversible only flow direction</p> <ul style="list-style-type: none"> • These valves must only be operated on pressure zones with reversible supply (3 and 5 with supply pressure 1 as exhaust air) or on a reversible pressure regulator. If necessary create pressure separation zones with duct separation. • Reversible 3/2-way solenoid valves do not permit the special function "ducted pilot exhaust air" • Ports 12 and 14 on the end plate variants must be supplied with the same pressure • Right-hand end plate with pilot air selector: can be realised via position 1 or 2 • Right-hand end plate with threaded connections: 12 and 14 must be supplied with the same pressure level | <p>Solenoid valves with any flow direction</p> <ul style="list-style-type: none"> • Valves with any flow direction such as the 5/2-way solenoid valve, code M, for example, are suitable for vacuum operation (standard valves such as the 2x 2/2-way solenoid valve with code VC, for example, may not be used for vacuum operation). • An exception is the 2x 2/2-way solenoid valve with code VV (T22CV), which only allows vacuum operation at ports 3 and 5. The solenoid valve with code VV (T22CV) cannot be combined with other valve functions; a separate pressure zone is required. |
|---|---|

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valves



| Operating and environmental conditions | | |
|--|----------|--|
| Operating medium | | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Pilot medium | | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/pilot medium | | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure, pilot air supply ²⁾ | [bar] | -0.9 ... +10 (valves with any flow direction and reversible valves) |
| | | 3 ... 10 (non-reversible valves) |
| Pilot pressure | [bar] | 3 ... 10 |
| Pilot air supply | | External |
| | | Internal via valve terminal |
| Ambient temperature | [°C] | -5 ... +50 |
| Approval certificate | | BIA (for characteristic SP and/or SN only) |
| | 24 V DC | C-Tick (only size 52 mm and solenoid valve with sensor (position sensing)) |
| | | c UL us – Recognized (OL) |
| | | CSA (OL) |
| | | c CSA us (OL) (only valves of size 52 mm) |
| CE marking (see declaration of conformity) | 110 V AC | In accordance with EU Low Voltage Directive (only VTSA/VTSA-F-MP) |
| | 24 V DC | In accordance with EU EMC Directive ¹⁾ |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

2) Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; operating pressure is 3 ... 10 bar here

Valve terminals VTSA/VTSA-F

Type code – Solenoid valves VSVA

VSVA – B – T 22 CV – A Z D

| Valve series | |
|--------------|-----------------------------------|
| VSVA | Standard valves to ISO 15407-1/-2 |

| Valve type | |
|------------|----------------|
| B | Sub-base valve |

| Valve function | |
|----------------|--|
| M | Single solenoid |
| B | Double solenoid |
| D | Double solenoid with dominant signal at 14 |
| P | Single solenoid, mid-position |
| T | 2 single solenoid valves in one housing |

| Connections/switching positions | |
|---------------------------------|---------------|
| 22 | 2/2-way valve |
| 32 | 3/2-way valve |
| 52 | 5/2-way valve |
| 53 | 5/3-way valve |

| Normal position | |
|-----------------|---|
| AD | Port 2 pressurised, port 4 exhausted, switching position 14 detenting, 12 mechanical spring |
| BD | Port 4 pressurised, port 2 exhausted, switching position 14 detenting, 12 mechanical spring |
| C | Closed |
| CV | Closed, vacuum operation possible at 3 and 5 |
| N | Code T with 2x closed, reverse operation |
| U | Open |
| F | Code T with 2x open, reverse operation |
| E | Exhausting |
| ED | Exhausting, switching position 14 detenting, 12 mechanical spring |
| EP | Exhausting, switching position 12 detenting, 14 mechanical spring |
| H | Code T with 1x open, 1x closed |
| W | Code T with 1x open, 1x closed, reverse operation |
| – | Double solenoid valve |

| Type of reset | |
|---------------|-----------------------|
| A | Pneumatic spring |
| M | Mechanical spring |
| – | Double solenoid valve |

| Pilot air supply | |
|------------------|----------|
| Z | External |
| – | Internal |

| Manual override | |
|-----------------|---|
| D | Non-detenting/detenting |
| TR | Non-detenting, heavy duty, detenting via accessory (as valve variant) |
| H | Non-detenting (as valve variant) |
| – | Covered (as valve variant) |

Valve terminals VTSA/VTSA-F

Type code – Solenoid valves VSVA



- A1 - 1 T1 L - APX - 0,5 - -

Standard

| | |
|----|--------------------------|
| A1 | ISO size 01, width 26 mm |
| A2 | ISO size 02, width 18 mm |
| D1 | ISO size 1, width 42 mm |
| D2 | ISO size 2, width 52 mm |

Operating voltage

| | |
|----|----------|
| 1 | 24 V DC |
| 2A | 110 V AC |

Electrical connection

| | |
|----|---|
| T1 | Plug-in (via valve terminal) |
| T2 | PIN with separate loads (for Interlock) |

Signal status display

| | |
|---|------------------|
| L | LED (integrated) |
| - | Without LED |

Sensor characteristic

| | |
|-----|--|
| ANC | NPN with cable |
| ANP | NPN with plug connector M8 |
| APC | PNP with cable |
| APP | PNP with plug connector M8 |
| APX | PNP with connecting cable and plug connector M12 |
| - | Without sensor |

Cable length

| | |
|-----|-------|
| 0,5 | 0.5 m |
| - | 2.5 m |

EU certification

| | |
|------|-------------------------------|
| EX1E | II 3G installation in housing |
| - | None |

Component for EU certification

| | |
|---|--------------------------|
| C | Compatible component |
| - | Non-compatible component |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 18 mm

J - Valve width
to ISO 15407-2
18 mm

Q - Flow rate
Valve width 18 mm:
VTSA up to 550 l/min
VTSA-F up to 700 l/min

L - Voltage
24 V DC
110 V AC



| Safety characteristics - Valve, width 18 mm | |
|---|---|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Min. 1/week |
| CE marking (see declaration of conformity) | 110 V AC 24 V DC |
| | To EU Low Voltage Directive In accordance with EU EMC Directive ¹⁾ (only solenoid valves with sensor) |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

| Safety characteristics - Valve width 18 mm, 24 V DC | | | |
|--|---------------|---|---|
| Valve function (with valve code) | Terminal code | Test pulses | |
| | | Max. positive test pulse with 0 signal [µs] | Max. negative test pulse with 1 signal [µs] |
| 5/2-way, double solenoid (B52) | J | 1500 | 800 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1700 | 1200 |
| 5/2-way, single solenoid (M52-A) | M | 1500 | 800 |
| 5/2-way, single solenoid (M52-M) | O | 1500 | 800 |
| 5/3-way, closed (P53C) | G | 1500 | 800 |
| 5/3-way, exhausted (P53E) | E | 1500 | 800 |
| 5/3-way, pressurised (P53U) | B | 1500 | 800 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 1500 | 800 |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 1500 | 800 |
| 5/3-way, port 2 pressurised, port 4 exhausted, switching position 14 detenting (P53AD) | SB | 1500 | 800 |
| 5/3-way, port 4 pressurised, port 2 exhausted, switching position 14 detenting (P53BD) | SD | 1500 | 800 |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1700 | 1200 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1700 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1700 | 1200 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1700 | 1200 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1700 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1700 | 1200 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1700 | 1200 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1700 | 1200 |

**New**

Valves with terminal code SA, SB, SE

FESTO

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 18 mm

| Technical data - Valve, width 18 mm | | | | | | | |
|--|---------------|----------------|-----------------|----------------|------------------|-------------------|------------|
| Valve function (with valve code) | Terminal code | Flow direction | | | Type of reset | | Weight [g] |
| | | Any | Reversible only | Non-reversible | Pneumatic spring | Mechanical spring | |
| 5/2-way, double solenoid (B52) | J | ■ | – | – | – | – | 172 |
| 5/2-way, double solenoid with dominant signal (D52) | D | ■ | – | – | – | – | 172 |
| 5/2-way, single solenoid (M52-A) | M | ■ | – | – | ■ | – | 163 |
| 5/2-way, single solenoid (M52-M) | O | ■ | – | – | – | ■ | 163 |
| 5/3-way, closed ¹⁾ (P53C) | G | ■ | – | – | – | ■ | 191 |
| 5/3-way, exhausted ¹⁾ (P53E) | E | ■ | – | – | – | ■ | 191 |
| 5/3-way, pressurised ¹⁾ (P53U) | B | ■ | – | – | – | ■ | 191 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | – | – | ■ | – | ■ | 170 |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | – | – | ■ | – | ■ | 170 |
| 5/3-way, port 2 pressurised, port 4 exhausted, switching position 14 detenting (P53AD) | SB | ■ | – | – | – | ■ | 172 |
| 5/3-way, port 4 pressurised, port 2 exhausted, switching position 14 detenting (P53BD) | SD | – | – | ■ | – | ■ | 172 |
| 2x3/2-way, single solenoid, closed (T32C) | K | – | – | ■ | ■ | – | 190 |
| 2x3/2-way, single solenoid, open (T32U) | N | – | – | ■ | ■ | – | 190 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | – | – | ■ | ■ | – | 190 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | – | ■ | – | ■ | – | 190 |
| 2x3/2-way, single solenoid, open (T32F) | P | – | ■ | – | ■ | – | 190 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | – | ■ | – | ■ | – | 190 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | – | – | ■ | ■ | – | 190 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | ■ | – | – | ■ | – | 190 |

- 1) If neither solenoid coil is energised, the valve assumes its mid-position by means of spring force.
If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 18 mm

| Standard nominal flow rate - Valve/valve terminal [l/min], width 18 mm | | | | | |
|--|---------------|--|--|--|--|
| Valve function (with valve code) | Terminal code | Flow rate | | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | J | 750 | 550 | 700 | 600 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 750 | 550 | 700 | 600 |
| 5/2-way, single solenoid (M52-A) | M | 750 | 550 | 700 | 600 |
| 5/2-way, single solenoid (M52-M) | O | 750 | 550 | 700 | 600 |
| 5/3-way, closed (P53C) | G | 700 | 450 | 650 | 550 |
| 5/3-way, exhausted (P53E) | E | 700 ¹⁾ 330 ²⁾ | 450 ¹⁾ 330 ²⁾ | 480 ¹⁾ 330 ²⁾ | 500 ¹⁾ 330 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 700 ¹⁾ 330 ²⁾ | 450 ¹⁾ 330 ²⁾ | 480 ¹⁾ 330 ²⁾ | 500 ¹⁾ 330 ²⁾ |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | – | 380 ¹⁾ 380 ²⁾ | 430 ¹⁾ 430 ²⁾ | 390 ¹⁾ 390 ²⁾ |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | – | 380 ¹⁾ 300 ²⁾ | 460 ¹⁾ 350 ²⁾ | 390 ¹⁾ 320 ²⁾ |
| 5/3-way, port 2 pressurised, port 4 exhausted, switching position 14 detenting (P53AD) | SB | – | 380 ¹⁾ 350 ²⁾ | 440 ¹⁾ 400 ²⁾ | 380 ¹⁾ 360 ²⁾ |
| 5/3-way, port 4 pressurised, port 2 exhausted, switching position 14 detenting (P53BD) | SD | – | 370 ¹⁾ 340 ²⁾ 360 ³⁾ 360 ⁴⁾ | 430 ¹⁾ 360 ²⁾ 450 ³⁾ 450 ⁴⁾ | 400 ¹⁾ 350 ²⁾ 390 ³⁾ 380 ⁴⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 600 | 400 | 550 | 500 |
| 2x3/2-way, single solenoid, open (T32U) | N | 600 | 400 | 550 | 500 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 600 | 400 | 550 | 500 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 600 | 400 | 550 | 500 |
| 2x3/2-way, single solenoid, open (T32F) | P | 600 | 400 | 550 | 500 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 600 | 400 | 550 | 500 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 700 | 500 | 650 | 500 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 700 | 500 | 650 | 500 |

- 1) Switching position
- 2) Mid-position
- 3) Switching position 4 → 5
- 4) Mid-position 2 → 3

 **Note**

When using the solenoid valves VSVA-B-P53AD-...- or VSVA-B-P53BD-...- (terminal code SB or SD) for free venting (1-->2 or 1-->4) in the detenting or mid-position, in the event of an operating pressure

greater than 6 bar, the flow can reduce or drop to 0 l/min. This does not happen if a tube measuring at least 15 cm in length is used at port 2/4.

**New**

Valves with terminal code SA, SB, SE

FESTO

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 18 mm


| Valve switching times in [ms], width 18 mm, nominal operating voltage 24 V DC/110 V AC | | | | |
|--|---------------|--|----------------------------|------------|
| Valve function (with valve code) | Terminal code | On | Off | Changeover |
| 5/2-way, double solenoid (B52) | J | – | – | 11 |
| 5/2-way, double solenoid with dominant signal (D52) | D | – | – | 13 |
| 5/2-way, single solenoid (M52-A) | M | 22 | 28 | – |
| 5/2-way, single solenoid (M52-M) | O | 12 | 38 | – |
| 5/3-way, closed (P53C) | G | 15 | 44 | – |
| 5/3-way, exhausted (P53E) | E | 15 | 44 | – |
| 5/3-way, pressurised (P53U) | B | 15 | 44 | – |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 13 for the control side 12 10 for the control side 14 | 37 for the control side 12 | (24) |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 10 for the control side 12 13 for the control side 14 | 30 for the control side 12 | (23) |
| 5/3-way, port 2 pressurised, port 4 exhausted, switching position 14 detenting (P53AD) | SB | 12 for the control side 12 9 for the control side 14 | 28 for the control side 12 | – |
| 5/3-way, port 4 pressurised, port 2 exhausted, switching position 14 detenting (P53BD) | SD | 12 for the control side 12 9 for the control side 14 | 28 for the control side 12 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 12 | 30 | – |
| 2x3/2-way, single solenoid, open (T32U) | N | 12 | 30 | – |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 12 | 30 | – |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 25 | 12 | – |
| 2x3/2-way, single solenoid, open (T32F) | P | 25 | 12 | – |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 25 | 12 | – |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 12 | 30 | – |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 12 | 30 | – |

| Coil characteristics, width 18 mm | | | |
|--|---------------|--|--|
| Valve function (with valve code) | Terminal code | Coil characteristics at 24 V DC in [W] | Coil characteristics at 110/120 V AC in [VA] |
| 5/2-way, double solenoid (B52) | J | 1.6 | 1.6 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1.3 | 1.0 |
| 5/2-way, single solenoid (M52-A) | M | 1.6 | 1.6 |
| 5/2-way, single solenoid (M52-M) | O | 1.6 | 1.6 |
| 5/3-way, closed (P53C) | G | 1.6 | 1.6 |
| 5/3-way, exhausted (P53E) | E | 1.6 | 1.6 |
| 5/3-way, pressurised (P53U) | B | 1.6 | 1.6 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 1.6 | – |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 1.6 | – |
| 5/3-way, port 2 pressurised, port 4 exhausted, switching position 14 detenting (P53AD) | SB | 1.6 | – |
| 5/3-way, port 4 pressurised, port 2 exhausted, switching position 14 detenting (P53BD) | SD | 1.6 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1.3 | 1.0 |

| Materials | |
|-------------------|------------------------|
| Housing | Die-cast aluminium, PA |
| Seals | FPM, NBR, HNBR |
| Screws | Galvanised steel |
| Note on materials | RoHS-compliant |

Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 18 mm | 561155 | VSVA-B-T22C-AZD-A2-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 18 mm | 561159 | VSVA-B-T22CV-AZD-A2-1T1L |
| | N | 2x 3/2-way solenoid valve, single solenoid, normally open | T32U | 18 mm | 539178 | VSVA-B-T32U-AZD-A2-1T1L |
| | K | 2x 3/2-way solenoid valve, single solenoid, normally closed | T32C | 18 mm | 539176 | VSVA-B-T32C-AZD-A2-1T1L |
| | H | 2x 3/2-way solenoid valve, single solenoid, 1x normally open, 1x normally closed | T32H | 18 mm | 539180 | VSVA-B-T32H-AZD-A2-1T1L |
| | P | 2x 3/2-way solenoid valve, single solenoid, reverse operation, normally open | T32F | 18 mm | 539179 | VSVA-B-T32F-AZD-A2-1T1L |
| | Q | 2x 3/2-way solenoid valve, single solenoid, reverse operation, normally closed | T32N | 18 mm | 539177 | VSVA-B-T32N-AZD-A2-1T1L |
| | R | 2x 3/2-way solenoid valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 18 mm | 539181 | VSVA-B-T32W-AZD-A2-1T1L |
| | M | 5/2-way solenoid valve, single solenoid, pneumatic spring return | M52-A | 18 mm | 539184 | VSVA-B-M52-AZD-A2-1T1L |
| | O | 5/2-way solenoid valve, single solenoid, mechanical spring return | M52-M | 18 mm | 539185 | VSVA-B-M52-MZD-A2-1T1L |
| | J | 5/2-way solenoid valve, double solenoid | B52 | 18 mm | 539182 | VSVA-B-B52-ZD-A2-1T1L |
| | D | 5/2-way solenoid valve, double solenoid, with dominant signal | D52 | 18 mm | 539183 | VSVA-B-D52-ZD-A2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 18 mm | 539186 | VSVA-B-P53U-ZD-A2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 18 mm | 539188 | VSVA-B-P53C-ZD-A2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 18 mm | 539187 | VSVA-B-P53E-ZD-A2-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 18 mm | 8031814 | VSVA-B-P53ED-ZD-A2-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 18 mm | 8031818 | VSVA-B-P53EP-ZD-A2-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, reset via mechanical spring | P53AD | 18 mm | 8031815 | VSVA-B-P53AD-ZD-A2-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 18 mm | 8031817 | VSVA-B-P53BD-ZD-A2-1T1L |


**New**

Valves with terminal code SA, SB, SE

FESTO


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR) | | | | | | |
|--|---|---|------------|---------|--------------------------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 18 mm | 8033457 | VSVA-B-T22C-AZTR-A2-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 18 mm | 8033458 | VSVA-B-T22CV-AZTR-A2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 18 mm | 8033446 | VSVA-B-T32U-AZTR-A2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 18 mm | 8033444 | VSVA-B-T32C-AZTR-A2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 18 mm | 8033448 | VSVA-B-T32H-AZTR-A2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 18 mm | 8033447 | VSVA-B-T32F-AZTR-A2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 18 mm | 8033445 | VSVA-B-T32N-AZTR-A2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 18 mm | 8033449 | VSVA-B-T32W-AZTR-A2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 18 mm | 8033452 | VSVA-B-M52-AZTR-A2-1T1L |
| | O | 5/2-way valve, single solenoid, reset via mechanical spring | M52-M | 18 mm | 8033453 | VSVA-B-M52-MZTR-A2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 18 mm | 8033450 | VSVA-B-B52-ZTR-A2-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 18 mm | 8033451 | VSVA-B-D52-ZTR-A2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 18 mm | 8033454 | VSVA-B-P53U-ZTR-A2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 18 mm | 8033456 | VSVA-B-P53C-ZTR-A2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 18 mm | 8033455 | VSVA-B-P53E-ZTR-A2-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 18 mm | 8039181 | VSVA-B-P53ED-ZTR-A2-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 18 mm | 8039190 | VSVA-B-P53EP-ZTR-A2-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, reset via mechanical spring | P53AD | 18 mm | 8039184 | VSVA-B-P53AD-ZTR-A2-1T1L |
| SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 18 mm | 8040110 | VSVA-B-P53BD-ZTR-A2-1T1L | |

Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, non-detenting (H) | | | | | | |
|---|---------------|---|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 18 mm | 8033475 | VSVA-B-T22C-AZH-A2-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 18 mm | 8033476 | VSVA-B-T22CV-AZH-A2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 18 mm | 8033464 | VSVA-B-T32U-AZH-A2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 18 mm | 8033462 | VSVA-B-T32C-AZH-A2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 18 mm | 8033466 | VSVA-B-T32H-AZH-A2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 18 mm | 8033465 | VSVA-B-T32F-AZH-A2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 18 mm | 8033463 | VSVA-B-T32N-AZH-A2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 18 mm | 8033467 | VSVA-B-T32W-AZH-A2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 18 mm | 8033470 | VSVA-B-M52-AZH-A2-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 18 mm | 8033471 | VSVA-B-M52-MZH-A2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 18 mm | 8033468 | VSVA-B-B52-ZH-A2-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 18 mm | 8033469 | VSVA-B-D52-ZH-A2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 18 mm | 8033472 | VSVA-B-P53U-ZH-A2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 18 mm | 8033474 | VSVA-B-P53C-ZH-A2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 18 mm | 8033473 | VSVA-B-P53E-ZH-A2-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 18 mm | 8039182 | VSVA-B-P53ED-ZH-A2-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 18 mm | 8039191 | VSVA-B-P53EP-ZH-A2-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, reset via mechanical spring | P53AD | 18 mm | 8039185 | VSVA-B-P53AD-ZH-A2-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 18 mm | 8040111 | VSVA-B-P53BD-ZH-A2-1T1L |

**New**

Valves with terminal code SA, SB, SE


FESTO**Valve terminal VTSA/VTSA-F**

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, covered | | | | | | |
|--|---|---|------------|---------|------------------------|-------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
| | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 18 mm | 8033493 | VSVA-B-T22C-AZ-A2-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 18 mm | 8033494 | VSVA-B-T22CV-AZ-A2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 18 mm | 8033482 | VSVA-B-T32U-AZ-A2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 18 mm | 8033480 | VSVA-B-T32C-AZ-A2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 18 mm | 8033484 | VSVA-B-T32H-AZ-A2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 18 mm | 8033483 | VSVA-B-T32F-AZ-A2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 18 mm | 8033481 | VSVA-B-T32N-AZ-A2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 18 mm | 8033485 | VSVA-B-T32W-AZ-A2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 18 mm | 8033488 | VSVA-B-M52-AZ-A2-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 18 mm | 8033489 | VSVA-B-M52-MZ-A2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 18 mm | 8033486 | VSVA-B-B52-Z-A2-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 18 mm | 8033487 | VSVA-B-D52-Z-A2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 18 mm | 8033490 | VSVA-B-P53U-Z-A2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 18 mm | 8033492 | VSVA-B-P53C-Z-A2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 18 mm | 8033491 | VSVA-B-P53E-Z-A2-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 18 mm | 8039183 | VSVA-B-P53ED-Z-A2-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 18 mm | 8039192 | VSVA-B-P53EP-Z-A2-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, reset via mechanical spring | P53AD | 18 mm | 8039186 | VSVA-B-P53AD-Z-A2-1T1L |
| SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 18 mm | 8040112 | VSVA-B-P53BD-Z-A2-1T1L | |


Valve terminal VTSA/VTSA-F


Ordering data – Solenoid valve 110/120 V AC


| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 110/120 V AC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 18 mm | 561156 | VSVA-B-T22C-AZD-A2-2AT1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 18 mm | 561160 | VSVA-B-T22CV-AZD-A2-2AT1L |
| | N | 2x 3/2-way solenoid valve, single solenoid, normally open | T32U | 18 mm | 539165 | VSVA-B-T32U-AZD-A2-2AT1L |
| | K | 2x 3/2-way solenoid valve, single solenoid, normally closed | T32C | 18 mm | 539163 | VSVA-B-T32C-AZD-A2-2AT1L |
| | H | 2x 3/2-way solenoid valve, single solenoid, 1x normally open, 1x normally closed | T32H | 18 mm | 539167 | VSVA-B-T32H-AZD-A2-2AT1L |
| | P | 2x 3/2-way solenoid valve, single solenoid, reverse operation, normally open | T32F | 18 mm | 539166 | VSVA-B-T32F-AZD-A2-2AT1L |
| | Q | 2x 3/2-way solenoid valve, single solenoid, reverse operation, normally closed | T32N | 18 mm | 539164 | VSVA-B-T32N-AZD-A2-2AT1L |
| | R | 2x 3/2-way solenoid valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 18 mm | 539168 | VSVA-B-T32W-AZD-A2-2AT1L |
| | M | 5/2-way solenoid valve, single solenoid, pneumatic spring return | M52-A | 18 mm | 539171 | VSVA-B-M52-AZD-A2-2AT1L |
| | O | 5/2-way solenoid valve, single solenoid, mechanical spring return | M52-M | 18 mm | 539172 | VSVA-B-M52-MZD-A2-2AT1L |
| | J | 5/2-way solenoid valve, double solenoid | B52 | 18 mm | 539169 | VSVA-B-B52-ZD-A2-2AT1L |
| | D | 5/2-way solenoid valve, double solenoid, with dominant signal | D52 | 18 mm | 539170 | VSVA-B-D52-ZD-A2-2AT1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 18 mm | 539173 | VSVA-B-P53U-ZD-A2-2AT1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 18 mm | 539175 | VSVA-B-P53C-ZD-A2-2AT1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 18 mm | 539174 | VSVA-B-P53E-ZD-A2-2AT1L |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 26 mm

 Valve width
to ISO 15407-2
26 mm

 Flow rate
Valve width 26 mm:
VTSA up to 1100 l/min
VTSA-F up to 1350 l/min

 Voltage
24 V DC
110 V AC



Safety characteristics - Valve, width 26 mm

| | |
|--|---|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Min. 1/week |
| CE marking (see declaration of conformity) | 110 V AC 24 V DC |
| | To EU Low Voltage Directive In accordance with EU EMC Directive ¹⁾ (only solenoid valves with sensor) |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Safety characteristics - Valve, width 26 mm, 24 V DC

| Valve function (with valve code) | Terminal code | Test pulses | |
|---|---------------|---|---|
| | | Max. positive test pulse with 0 signal [µs] | Max. negative test pulse with 1 signal [µs] |
| 5/2-way, double solenoid (B52) | J | 1200 | 800 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1500 | 1200 |
| 5/2-way, single solenoid (M52-A) | M | 1200 | 800 |
| 5/2-way, single solenoid (M52-M) | O | 1200 | 800 |
| 5/3-way, closed (P53C) | G | 1200 | 800 |
| 5/3-way, exhausted (P53E) | E | 1200 | 800 |
| 5/3-way, pressurised (P53U) | B | 1200 | 800 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 1200 | 1100 |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 1200 | 1000 |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) | SB | 1200 | 1100 |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) | SD | 1200 | 1100 |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1500 | 1200 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1500 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1500 | 1200 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1500 | 1200 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1500 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1500 | 1200 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1500 | 1200 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1500 | 1200 |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 26 mm

| Technical data - Valve, width 26 mm | | | | | | | |
|---|---------------|----------------|-----------------|----------------|------------------|-------------------|------------|
| Valve function (with valve code) | Terminal code | Flow direction | | | Type of reset | | Weight [g] |
| | | Any | Reversible only | Non-reversible | Pneumatic spring | Mechanical spring | |
| 5/2-way, double solenoid (B52) | J | ■ | – | – | – | – | 276 |
| 5/2-way, double solenoid with dominant signal (D52) | D | ■ | – | – | – | – | 276 |
| 5/2-way, single solenoid (M52-A) | M | ■ | – | – | ■ | – | 293 |
| 5/2-way, single solenoid (M52-M) | O | ■ | – | – | – | ■ | 293 |
| 5/3-way, closed ¹⁾ (P53C) | G | ■ | – | – | – | ■ | 320 |
| 5/3-way, exhausted ¹⁾ (P53E) | E | ■ | – | – | – | ■ | 320 |
| 5/3-way, pressurised ¹⁾ (P53U) | B | ■ | – | – | – | ■ | 320 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | – | – | ■ | – | ■ | 291 |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | – | – | ■ | – | ■ | 291 |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) | SB | ■ | – | – | – | ■ | 301 |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) | SD | – | – | ■ | – | ■ | 301 |
| 2x3/2-way, single solenoid, closed (T32C) | K | – | – | ■ | ■ | – | 335 |
| 2x3/2-way, single solenoid, open (T32U) | N | – | – | ■ | ■ | – | 335 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | – | – | ■ | ■ | – | 335 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | – | ■ | – | ■ | – | 335 |
| 2x3/2-way, single solenoid, open (T32F) | P | – | ■ | – | ■ | – | 335 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | – | ■ | – | ■ | – | 335 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | – | – | ■ | ■ | – | 335 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | ■ | – | – | ■ | – | 335 |

- 1) If neither solenoid coil is energised, the valve assumes its mid-position by means of spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 26 mm

| Standard nominal flow rate - Valve/valve terminal [l/min], width 26 mm | | | | | |
|---|---------------|---|---|---|---|
| Valve function (with valve code) | Terminal code | Flow rate | | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | J | 1400 | 1100 | 1350 | 1200 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1400 | 1100 | 1350 | 1200 |
| 5/2-way, single solenoid (M52-A) | M | 1400 | 1100 | 1350 | 1200 |
| 5/2-way, single solenoid (M52-M) | O | 1400 | 1100 | 1350 | 1200 |
| 5/3-way, closed (P53C) | G | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted (P53E) | E | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 1400 ¹⁾ 700 ²⁾ | 1000 ¹⁾ 700 ²⁾ | 1350 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) | SB | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) | SD | – | 850 ¹⁾ 820 ²⁾ | 950 ¹⁾ 860 ²⁾ | 900 ¹⁾ 840 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1250 | 900 | 1150 | 1100 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1250 | 900 | 1150 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1250 | 900 | 1150 | 1100 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1250 | 900 | 1150 | 1100 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1250 | 900 | 1150 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1250 | 900 | 1150 | 1100 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1350 | 1000 | 1300 | 1100 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1350 | 1000 | 1300 | 1100 |

- 1) Switching position
2) Mid-position



Note

The solenoid valves V5VA-B-P53BD-...-A1-1T1L (terminal code SD) can be operated without restrictions at an operating pressure of less than 6 bar. At an operating pressure of more than 6 bar, the actual flow must not exceed 1900 l/min (e.g. 10-->2 bar) or these

solenoid valves may switch unintentionally (to the mid-position or switching position 14). At high pressures, this can be achieved using a flow control valve/restrictor, for example. (e.g. a reducing adapter on port 2 or 4 to reduce it from G1/4 to G1/8).

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 26 mm


| Valve switching times in [ms], width 26 mm, nominal operating voltage 24 V DC/110 V AC | | | | |
|--|---------------|--|--|------------|
| Valve function (with valve code) | Terminal code | On | Off | Changeover |
| 5/2-way, double solenoid (B52) | J | – | – | 18 |
| 5/2-way, double solenoid with dominant signal (D52) | D | – | – | 21 |
| 5/2-way, single solenoid (M52-A) | M | 25 | 45 | – |
| 5/2-way, single solenoid (M52-M) | O | 20 | 65 | – |
| 5/3-way, closed (P53C) | G | 22 | 65 | – |
| 5/3-way, exhausted (P53E) | E | 22 | 65 | – |
| 5/3-way, pressurised (P53U) | B | 22 | 65 | – |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 22 for the control side 12 9 for the control side 14 | 49 for the control side 12 | 33 |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 10 for the control side 12 22 for the control side 14 | 50 for the control side 14 | 40 |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) | SB | 19 for the control side 12 9 for the control side 14 | 36 for the control side 12 | 32 |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) | SD | 16 for the control side 12 9 for the control side 14 | 26 for the control side 12 36 for the control side 14 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 20 | 38 | – |
| 2x3/2-way, single solenoid, open (T32U) | N | 20 | 38 | – |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 20 | 38 | – |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 32 | 30 | – |
| 2x3/2-way, single solenoid, open (T32F) | P | 32 | 30 | – |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 32 | 30 | – |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 20 | 38 | – |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 20 | 38 | – |

| Coil characteristics, width 26 mm | | | |
|---|---------------|--|--|
| Valve function (with valve code) | Terminal code | Coil characteristics at 24 V DC in [W] | Coil characteristics at 110/120 V AC in [VA] |
| 5/2-way, double solenoid (B52) | J | 1.6 | 1.6 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1.3 | 1.0 |
| 5/2-way, single solenoid (M52-A) | M | 1.6 | 1.6 |
| 5/2-way, single solenoid (M52-M) | O | 1.6 | 1.6 |
| 5/3-way, closed (P53C) | G | 1.6 | 1.6 |
| 5/3-way, exhausted (P53E) | E | 1.6 | 1.6 |
| 5/3-way, pressurised (P53U) | B | 1.6 | 1.6 |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) | SA | 1.6 | – |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) | SE | 1.6 | – |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) | SB | 1.6 | – |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) | SD | 1.6 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1.3 | 1.0 |

| Materials | |
|-------------------|------------------------|
| Housing | Die-cast aluminium, PA |
| Seals | FPM, NBR, HNBR |
| Screws | Galvanised steel |
| Note on materials | RoHS-compliant |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 26 mm | 561149 | VSVA-B-T22C-AZD-A1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 26 mm | 561153 | VSVA-B-T22CV-AZD-A1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 26 mm | 539152 | VSVA-B-T32U-AZD-A1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 26 mm | 539150 | VSVA-B-T32C-AZD-A1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 26 mm | 539154 | VSVA-B-T32H-AZD-A1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 26 mm | 539153 | VSVA-B-T32F-AZD-A1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 26 mm | 539151 | VSVA-B-T32N-AZD-A1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 26 mm | 539155 | VSVA-B-T32W-AZD-A1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 26 mm | 539158 | VSVA-B-M52-AZD-A1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 26 mm | 539159 | VSVA-B-M52-MZD-A1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 26 mm | 539156 | VSVA-B-B52-ZD-A1-1T1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 26 mm | 539157 | VSVA-B-D52-ZD-A1-1T1L |
| | B | 5/3-way valve, mid-position pressurised | P53U | 26 mm | 539160 | VSVA-B-P53U-ZD-A1-1T1L |
| | G | 5/3-way valve, mid-position closed | P53C | 26 mm | 539162 | VSVA-B-P53C-ZD-A1-1T1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 26 mm | 539161 | VSVA-B-P53E-ZD-A1-1T1L |
| | SA | 5/3-way valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 26 mm | 560727 | VSVA-B-P53ED-ZD-A1-1T1L |
| | SE | 5/3-way valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 26 mm | 8026638 | VSVA-B-P53EP-ZD-A1-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return | P53AD | 26 mm | 560728 | VSVA-B-P53AD-ZD-A1-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 18 mm | 8031816 | VSVA-B-P53BD-ZD-A1-1T1L |

Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC


| Ordering data – VSVA solenoid valve with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR) | | | | | | |
|--|---------------|---|------------|-------|----------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 26 mm | 8033032 | VSVA-B-T22C-AZTR-A1-1T1L |
| | VV | 2x 2/2-way solenoid valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 26 mm | 8033033 | VSVA-B-T22CV-AZTR-A1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 26 mm | 8033015 | VSVA-B-T32U-AZTR-A1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 26 mm | 8033013 | VSVA-B-T32C-AZTR-A1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 26 mm | 8033017 | VSVA-B-T32H-AZTR-A1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 26 mm | 8033016 | VSVA-B-T32F-AZTR-A1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 26 mm | 8033014 | VSVA-B-T32N-AZTR-A1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 26 mm | 8033018 | VSVA-B-T32W-AZTR-A1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 26 mm | 8033021 | VSVA-B-M52-AZTR-A1-1T1L |
| | O | 5/2-way valve, single solenoid, reset via mechanical spring | M52-M | 26 mm | 8033022 | VSVA-B-M52-MZTR-A1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 26 mm | 8033019 | VSVA-B-B52-ZTR-A1-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 26 mm | 8033020 | VSVA-B-D52-ZTR-A1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 26 mm | 8033023 | VSVA-B-P53U-ZTR-A1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 26 mm | 8033025 | VSVA-B-P53C-ZTR-A1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 26 mm | 8033024 | VSVA-B-P53E-ZTR-A1-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 26 mm | 8033028 | VSVA-B-P53ED-ZTR-A1-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 26 mm | 8033035 | VSVA-B-P53EP-ZTR-A1-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, reset via mechanical spring | P53AD | 26 mm | 8033029 | VSVA-B-P53AD-ZTR-A1-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 26 mm | 8039187 | VSVA-B-P53BD-ZTR-A1-1T1L |

**New**

Valves with terminal code SD


FESTO**Valve terminal VTSA/VTSA-F**

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, non-detenting (H) | | | | | | |
|---|---------------|---|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 26 mm | 8033055 | VSVA-B-T22C-AZH-A1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 26 mm | 8033056 | VSVA-B-T22CV-AZH-A1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 26 mm | 8033038 | VSVA-B-T32U-AZH-A1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 26 mm | 8033036 | VSVA-B-T32C-AZH-A1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 26 mm | 8033040 | VSVA-B-T32H-AZH-A1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 26 mm | 8033039 | VSVA-B-T32F-AZH-A1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 26 mm | 8033037 | VSVA-B-T32N-AZH-A1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 26 mm | 8033041 | VSVA-B-T32W-AZH-A1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 26 mm | 8033044 | VSVA-B-M52-AZH-A1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 26 mm | 8033045 | VSVA-B-M52-MZH-A1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 26 mm | 8033042 | VSVA-B-B52-ZH-A1-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 26 mm | 8033043 | VSVA-B-D52-ZH-A1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 26 mm | 8033046 | VSVA-B-P53U-ZH-A1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 26 mm | 8033048 | VSVA-B-P53C-ZH-A1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 26 mm | 8033047 | VSVA-B-P53E-ZH-A1-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 26 mm | 8033051 | VSVA-B-P53ED-ZH-A1-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 26 mm | 8033058 | VSVA-B-P53EP-ZH-A1-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return | P53AD | 26 mm | 8033052 | VSVA-B-P53AD-ZH-A1-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 26 mm | 8039188 | VSVA-B-P53BD-ZH-A1-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, covered | | | | | | |
|---|---------------|---|------------|-------|----------------|--------------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 26 mm | 8033078 | VSVA-B-T22C-AZ-A1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 26 mm | 8033079 | VSVA-B-T22CV-AZ-A1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 26 mm | 8033061 | VSVA-B-T32U-AZ-A1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 26 mm | 8033059 | VSVA-B-T32C-AZ-A1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 26 mm | 8033063 | VSVA-B-T32H-AZ-A1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 26 mm | 8033062 | VSVA-B-T32F-AZ-A1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 26 mm | 8033060 | VSVA-B-T32N-AZ-A1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 26 mm | 8033064 | VSVA-B-T32W-AZ-A1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 26 mm | 8033067 | VSVA-B-M52-AZ-A1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 26 mm | 8033068 | VSVA-B-M52-MZ-A1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 26 mm | 8033065 | VSVA-B-B52-Z-A1-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 26 mm | 8033066 | VSVA-B-D52-Z-A1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 26 mm | 8033069 | VSVA-B-P53U-Z-A1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 26 mm | 8033071 | VSVA-B-P53C-Z-A1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 26 mm | 8033070 | VSVA-B-P53E-Z-A1-1T1L |
| | SA | 5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return | P53ED | 26 mm | 8033074 | VSVA-B-P53ED-Z-A1-1T1L |
| | SE | 5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return | P53EP | 26 mm | 8033081 | VSVA-B-P53EP-Z-A1-1T1L |
| | SB | 5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return | P53AD | 26 mm | 8033075 | VSVA-B-P53AD-Z-A1-1T1L |
| | SD | 5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, reset via mechanical spring | P53BD | 26 mm | 8039189 | VSVA-B-P53BD-Z-A1-1T1L |

Valve terminal VTSA/VTSA-F


Ordering data – Solenoid valve 110/120 V AC


| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 110/120 V AC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 26 mm | 561150 | VSVA-B-T22C-AZD-A1-2AT1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 26 mm | 561154 | VSVA-B-T22CV-AZD-A1-2AT1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 26 mm | 539139 | VSVA-B-T32U-AZD-A1-2AT1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 26 mm | 539137 | VSVA-B-T32C-AZD-A1-2AT1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 26 mm | 539141 | VSVA-B-T32H-AZD-A1-2AT1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 26 mm | 539140 | VSVA-B-T32F-AZD-A1-2AT1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 26 mm | 539138 | VSVA-B-T32N-AZD-A1-2AT1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 26 mm | 539142 | VSVA-B-T32W-AZD-A1-2AT1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 26 mm | 539145 | VSVA-B-M52-AZD-A1-2AT1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 26 mm | 539146 | VSVA-B-M52-MZD-A1-2AT1L |
| | J | 5/2-way valve, double solenoid | B52 | 26 mm | 539143 | VSVA-B-B52-ZD-A1-2AT1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 26 mm | 539144 | VSVA-B-D52-ZD-A1-2AT1L |
| | B | 5/3-way valve, mid-position pressurised | P53U | 26 mm | 539147 | VSVA-B-P53U-ZD-A1-2AT1L |
| | G | 5/3-way valve, mid-position closed | P53C | 26 mm | 539149 | VSVA-B-P53C-ZD-A1-2AT1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 26 mm | 539148 | VSVA-B-P53E-ZD-A1-2AT1L |


Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 42 mm

FESTO

-  - Valve width
to ISO 5599-2
42 mm (ISO 1)

-  - Flow rate
Valve width 42 mm:
VTSA up to 1300 l/min
VTSA-F up to 1860 l/min

-  - Voltage
24 V DC
110 V AC



| Safety characteristics - Valve, width 42 mm | |
|---|---|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Min. 1/week |
| CE marking (see 110 V AC declaration of conformity) | To EU Low Voltage Directive |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

| Safety characteristics - Valve, width 42 mm, 24 V DC | | | |
|--|---------------|---|---|
| Valve function (with valve code) | Terminal code | Test pulses | |
| | | Max. positive test pulse with 0 signal [μs] | Max. negative test pulse with 1 signal [μs] |
| 5/2-way, double solenoid (B52) | J | 1400 | 900 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1600 | 1100 |
| 5/2-way, single solenoid (M52-A) | M | 1400 | 900 |
| 5/2-way, single solenoid (M52-M) | O | 1400 | 900 |
| 5/3-way, closed (P53C) | G | 1400 | 900 |
| 5/3-way, exhausted (P53E) | E | 1400 | 900 |
| 5/3-way, pressurised (P53U) | B | 1400 | 900 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | - | - |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1600 | 1100 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1600 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1600 | 1100 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1600 | 1100 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1600 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1600 | 1100 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1600 | 1100 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1600 | 1100 |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 42 mm

| Valve technical data, width 42 mm | | | | | | | |
|---|---------------|----------------|-----------------|----------------|------------------|-------------------|------------|
| Valve function (with valve code) | Terminal code | Flow direction | | | Type of reset | | Weight [g] |
| | | Any | Reversible only | Non-reversible | Pneumatic spring | Mechanical spring | |
| 5/2-way, double solenoid (B52) | J | ■ | – | – | – | – | 439 |
| 5/2-way, double solenoid with dominant signal (D52) | D | ■ | – | – | – | – | 439 |
| 5/2-way, single solenoid (M52-A) | M | ■ | – | – | ■ | – | 426 |
| 5/2-way, single solenoid (M52-M) | O | ■ | – | – | – | ■ | 426 |
| 5/3-way, closed ¹⁾ (P53C) | G | ■ | – | – | – | ■ | 456 |
| 5/3-way, exhausted ¹⁾ (P53E) | E | ■ | – | – | – | ■ | 456 |
| 5/3-way, pressurised ¹⁾ (P53U) | B | ■ | – | – | – | ■ | 456 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | ■ | – | – | – | – | 456 |
| 2x3/2-way, single solenoid, closed (T32C) | K | – | – | ■ | ■ | – | 442 |
| 2x3/2-way, single solenoid, open (T32U) | N | – | – | ■ | ■ | – | 442 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | – | – | ■ | ■ | – | 442 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | – | ■ | – | ■ | – | 442 |
| 2x3/2-way, single solenoid, open (T32F) | P | – | ■ | – | ■ | – | 442 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | – | ■ | – | ■ | – | 442 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | – | – | ■ | ■ | – | 442 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | ■ | – | – | ■ | – | 442 |

- 1) If neither solenoid coil is energised, the valve assumes its mid-position by means of spring force.
If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

| Standard nominal flow rate - Valve/valve terminal [l/min], width 42 mm | | | | | |
|--|---------------|---|---|---|---|
| Valve function (with valve code) | Terminal code | Flow rate | | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | J | 2000 | 1300 | 1860 | 1500 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 2000 | 1300 | 1860 | 1500 |
| 5/2-way, single solenoid (M52-A) | M | 2000 | 1300 | 1860 | 1500 |
| 5/2-way, single solenoid (M52-M) | O | 2000 | 1300 | 1860 | 1500 |
| 5/3-way, closed (P53C) | G | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 1400 ¹⁾ 800 ²⁾ |
| 5/3-way, exhausted (P53E) | E | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 1400 ¹⁾ 800 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 1900 ¹⁾ 950 ²⁾ | 1200 ¹⁾ 800 ²⁾ | 1690 ¹⁾ 830 ²⁾ | 1400 ¹⁾ 800 ²⁾ |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 1700 ¹⁾ 700 ²⁾ | 1400 ¹⁾ 800 ²⁾ | 1700 ¹⁾ 700 ²⁾ | 1400 ¹⁾ 700 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1600 | 1200 | 1300 | 1200 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1600 | 1200 | 1300 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1600 | 1200 | 1300 | 1200 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1600 | 1200 | 1300 | 1200 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1600 | 1200 | 1300 | 1200 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1600 | 1200 | 1300 | 1200 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1600 | 1400 | 1500 | 1400 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1600 | 1400 | 1500 | 1400 |

- 1) Switching position
2) Mid-position

Valve terminal VTSA/VTSA-F

FESTO

Technical data – Solenoid valve, width 42 mm

| Valve switching times in [ms], width 42 mm, nominal operating voltage 24 V DC/110 V AC | | | | | | | |
|--|---------------|---------|-----|------------|----------|-----|----|
| Valve function (with valve code) | Terminal code | 24 V DC | | | 110 V AC | | |
| | | On | Off | Changeover | On | Off | |
| 5/2-way, double solenoid (B52) | J | – | – | 16 | – | – | 16 |
| 5/2-way, double solenoid with dominant signal (D52) | D | – | – | 19 | – | – | 19 |
| 5/2-way, single solenoid (M52-A) | M | 27 | 45 | – | 20 | 55 | – |
| 5/2-way, single solenoid (M52-M) | O | 22 | 60 | – | 20 | 55 | – |
| 5/3-way, closed (P53C) | G | 22 | 65 | 38 | 22 | 68 | 41 |
| 5/3-way, exhausted (P53E) | E | 22 | 65 | 38 | 22 | 68 | 41 |
| 5/3-way, pressurised (P53U) | B | 22 | 65 | 38 | 22 | 68 | 41 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 22 | 65 | 38 | – | – | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 20 | 38 | – | 22 | 46 | – |
| 2x3/2-way, single solenoid, open (T32U) | N | 20 | 38 | – | 22 | 46 | – |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 20 | 38 | – | 22 | 46 | – |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 34 | 28 | – | 34 | 38 | – |
| 2x3/2-way, single solenoid, open (T32F) | P | 34 | 28 | – | 34 | 38 | – |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 34 | 28 | – | 34 | 38 | – |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 20 | 38 | – | 22 | 46 | – |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 20 | 38 | – | 22 | 46 | – |


| Coil characteristics for width 42 mm | | | |
|---|---------------|--|--|
| Valve function (with valve code) | Terminal code | Coil characteristics at 24 V DC in [W] | Coil characteristics at 110/120 V AC in [VA] |
| 5/2-way, double solenoid (B52) | J | 1.6 | 1.6 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1.3 | 1.0 |
| 5/2-way, single solenoid (M52-A) | M | 1.6 | 1.6 |
| 5/2-way, single solenoid (M52-M) | O | 1.6 | 1.6 |
| 5/3-way, closed (P53C) | G | 1.6 | 1.6 |
| 5/3-way, exhausted (P53E) | E | 1.6 | 1.6 |
| 5/3-way, pressurised (P53U) | B | 1.6 | 1.6 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 1.6 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1.3 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1.3 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22CV) | VV | 1.3 | 1.0 |

| Materials | |
|-------------------|------------------------|
| Housing | Die-cast aluminium, PA |
| Seals | FPM, NBR, HNBR |
| Screws | Galvanised steel |
| Note on materials | RoHS-compliant |

Valve terminal VTSA/VTSA-F


Ordering data – Solenoid valve 24 V DC

FESTO

| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 42 mm | 561340 | VSVA-B-T22C-AZD-D1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 42 mm | 561344 | VSVA-B-T22CV-AZD-D1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 42 mm | 543692 | VSVA-B-T32U-AZD-D1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 42 mm | 543690 | VSVA-B-T32C-AZD-D1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 42 mm | 543694 | VSVA-B-T32H-AZD-D1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 42 mm | 543693 | VSVA-B-T32F-AZD-D1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 42 mm | 543691 | VSVA-B-T32N-AZD-D1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 42 mm | 543695 | VSVA-B-T32W-AZD-D1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 42 mm | 543698 | VSVA-B-M52-AZD-D1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 42 mm | 543699 | VSVA-B-M52-MZD-D1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 42 mm | 543696 | VSVA-B-B52-ZD-D1-1T1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 42 mm | 543697 | VSVA-B-D52-ZD-D1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 42 mm | 543700 | VSVA-B-P53U-ZD-D1-1T1L |
| | G | 5/3-way valve, mid-position closed | P53C | 42 mm | 543702 | VSVA-B-P53C-ZD-D1-1T1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 42 mm | 543701 | VSVA-B-P53E-ZD-D1-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 42 mm | 8000464 | VSVA-B-P53F-ZD-D1-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR) | | | | | | |
|--|---------------|---|------------|-------|----------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 42 mm | 8034781 | VSVA-B-T22C-AZTR-D1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 42 mm | 8034782 | VSVA-B-T22CV-AZTR-D1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 42 mm | 8034770 | VSVA-B-T32U-AZTR-D1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 42 mm | 8034768 | VSVA-B-T32C-AZTR-D1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 42 mm | 8034772 | VSVA-B-T32H-AZTR-D1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 42 mm | 8034771 | VSVA-B-T32F-AZTR-D1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 42 mm | 8034769 | VSVA-B-T32N-AZTR-D1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 42 mm | 8034773 | VSVA-B-T32W-AZTR-D1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 42 mm | 8034776 | VSVA-B-M52-AZTR-D1-1T1L |
| | O | 5/2-way valve, single solenoid, reset via mechanical spring | M52-M | 42 mm | 8034777 | VSVA-B-M52-MZTR-D1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 42 mm | 8034774 | VSVA-B-B52-ZTR-D1-1T1L |
| | D | 5/2-way solenoid valve, double solenoid, dominant | D52 | 42 mm | 8034775 | VSVA-B-D52-ZTR-D1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 42 mm | 8034778 | VSVA-B-P53U-ZTR-D1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 42 mm | 8034780 | VSVA-B-P53C-ZTR-D1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 42 mm | 8034779 | VSVA-B-P53E-ZTR-D1-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 42 mm | 8034783 | VSVA-B-P53F-ZTR-D1-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, non-detenting (H) | | | | | | |
|---|--|---|------------|---------|------------------------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 42 mm | 8034812 | VSVA-B-T22C-AZH-D1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 42 mm | 8034813 | VSVA-B-T22CV-AZH-D1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 42 mm | 8034801 | VSVA-B-T32U-AZH-D1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 42 mm | 8034799 | VSVA-B-T32C-AZH-D1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 42 mm | 8034803 | VSVA-B-T32H-AZH-D1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 42 mm | 8034802 | VSVA-B-T32F-AZH-D1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 42 mm | 8034800 | VSVA-B-T32N-AZH-D1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 42 mm | 8034804 | VSVA-B-T32W-AZH-D1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 42 mm | 8034807 | VSVA-B-M52-AZH-D1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 42 mm | 8034808 | VSVA-B-M52-MZH-D1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 42 mm | 8034805 | VSVA-B-B52-ZH-D1-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 42 mm | 8034806 | VSVA-B-D52-ZH-D1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 42 mm | 8034809 | VSVA-B-P53U-ZH-D1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 42 mm | 8034811 | VSVA-B-P53C-ZH-D1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 42 mm | 8034810 | VSVA-B-P53E-ZH-D1-1T1L |
| VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 42 mm | 8034814 | VSVA-B-P53F-ZH-D1-1T1L | |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, covered | | | | | | |
|---|---------------|---|------------|-------|----------------|--------------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 42 mm | 8034843 | VSVA-B-T22C-AZ-D1-1T1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 42 mm | 8034844 | VSVA-B-T22CV-AZ-D1-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 42 mm | 8034832 | VSVA-B-T32U-AZ-D1-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 42 mm | 8034830 | VSVA-B-T32C-AZ-D1-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 42 mm | 8034834 | VSVA-B-T32H-AZ-D1-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 42 mm | 8034833 | VSVA-B-T32F-AZ-D1-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 42 mm | 8034831 | VSVA-B-T32N-AZ-D1-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 42 mm | 8034835 | VSVA-B-T32W-AZ-D1-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 42 mm | 8034838 | VSVA-B-M52-AZ-D1-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 42 mm | 8034839 | VSVA-B-M52-MZ-D1-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 42 mm | 8034836 | VSVA-B-B52-Z-D1-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 42 mm | 8034837 | VSVA-B-D52-Z-D1-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 42 mm | 8034840 | VSVA-B-P53U-Z-D1-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 42 mm | 8034842 | VSVA-B-P53C-Z-D1-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 42 mm | 8034841 | VSVA-B-P53E-Z-D1-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 42 mm | 8034845 | VSVA-B-P53F-Z-D1-1T1L |

Valve terminal VTSA/VTSA-F


Ordering data – Solenoid valve 110/120 V AC


| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|---|------------|-------|----------|---------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 110/120 V AC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 42 mm | 561341 | VSVA-B-T22C-AZD-D1-2AT1L |
| | VV | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5 | T22CV | 42 mm | 561345 | VSVA-B-T22CV-AZD-D1-2AT1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 42 mm | 543679 | VSVA-B-T32U-AZD-D1-2AT1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 42 mm | 543677 | VSVA-B-T32C-AZD-D1-2AT1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 42 mm | 543681 | VSVA-B-T32H-AZD-D1-2AT1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 42 mm | 543680 | VSVA-B-T32F-AZD-D1-2AT1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 42 mm | 543678 | VSVA-B-T32N-AZD-D1-2AT1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 42 mm | 543682 | VSVA-B-T32W-AZD-D1-2AT1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 42 mm | 543685 | VSVA-B-M52-AZD-D1-2AT1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 42 mm | 543686 | VSVA-B-M52-MZD-D1-2AT1L |
| | J | 5/2-way valve, double solenoid | B52 | 42 mm | 543683 | VSVA-B-B52-ZD-D1-2AT1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 42 mm | 543684 | VSVA-B-D52-ZD-D1-2AT1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 42 mm | 543687 | VSVA-B-P53U-ZD-D1-2AT1L |
| | G | 5/3-way valve, mid-position closed | P53C | 42 mm | 543689 | VSVA-B-P53C-ZD-D1-2AT1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 42 mm | 543688 | VSVA-B-P53E-ZD-D1-2AT1L |


Valve terminal VTSA/VTSA-F


Technical data – Solenoid valve, width 52 mm

FESTO

-  - Valve width
to ISO 5599-2
52 mm (ISO 2)

-  - Flow rate
Valve width 52 mm:
VTSA up to 2900 l/min
VTSA-F up to 2900 l/min

-  - Voltage
24 V DC
110 V AC

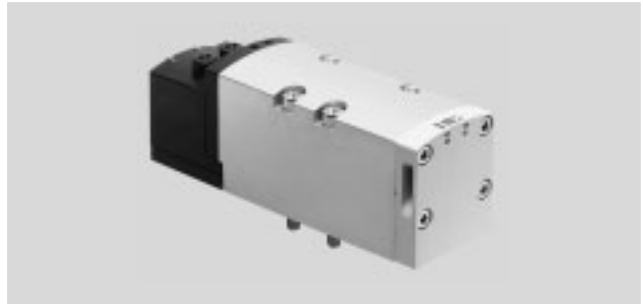

| Safety characteristics - Valve, width 52 mm | |
|---|--|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Min. 1/week |
| CE marking (see declaration of conformity) | 110 V AC 24 V DC |
| | To EU Low Voltage Directive In accordance with EU EMC Directive ¹⁾ |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

| Safety characteristics - Valve, width 52 mm, 24 V DC | | | |
|--|---------------|---|---|
| Valve function (with valve code) | Terminal code | Test pulses | |
| | | Max. positive test pulse with 0 signal [µs] | Max. negative test pulse with 1 signal [µs] |
| 5/2-way, double solenoid (B52) | J | 1000 | 1500 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 1000 | 1500 |
| 5/2-way, single solenoid (M52-A) | M | 1000 | 1500 |
| 5/2-way, single solenoid (M52-M) | O | 1000 | 1500 |
| 5/3-way, closed (P53C) | G | 1000 | 1500 |
| 5/3-way, exhausted (P53E) | E | 1000 | 1500 |
| 5/3-way, pressurised (P53U) | B | 1000 | 1500 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | – | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 1000 | 1500 |
| 2x3/2-way, single solenoid, open (T32U) | N | 1000 | 1500 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 1000 | 1500 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 1000 | 1500 |
| 2x3/2-way, single solenoid, open (T32F) | P | 1000 | 1500 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 1000 | 1500 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 1000 | 1500 |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve, width 52 mm

| Technical data - Valve, width 52 mm | | | | | | | |
|---|---------------|----------------|-----------------|----------------|------------------|-------------------|------------|
| Valve function (with valve code) | Terminal code | Flow direction | | | Type of reset | | Weight [g] |
| | | Any | Reversible only | Non-reversible | Pneumatic spring | Mechanical spring | |
| 5/2-way, double solenoid (B52) | J | ■ | – | – | – | – | 732 |
| 5/2-way, double solenoid with dominant signal (D52) | D | ■ | – | – | – | – | 732 |
| 5/2-way, single solenoid (M52-A) | M | ■ | – | – | ■ | – | 702 |
| 5/2-way, single solenoid (M52-M) | O | ■ | – | – | – | ■ | 702 |
| 5/3-way, closed ¹⁾ (P53C) | G | ■ | – | – | – | ■ | 780 |
| 5/3-way, exhausted ¹⁾ (P53E) | E | ■ | – | – | – | ■ | 780 |
| 5/3-way, pressurised ¹⁾ (P53U) | B | ■ | – | – | – | ■ | 780 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | ■ | – | – | – | – | 780 |
| 2x3/2-way, single solenoid, closed (T32C) | K | – | – | ■ | ■ | – | 740 |
| 2x3/2-way, single solenoid, open (T32U) | N | – | – | ■ | ■ | – | 740 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | – | – | ■ | ■ | – | 740 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | – | ■ | – | ■ | – | 740 |
| 2x3/2-way, single solenoid, open (T32F) | P | – | ■ | – | ■ | – | 740 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | – | ■ | – | ■ | – | 740 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | – | – | ■ | ■ | – | 740 |

- 1) If neither solenoid coil is energised, the valve assumes its mid-position by means of spring force.
If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

| Standard nominal flow rate - Valve/valve terminal [l/min], width 52 mm | | | | | |
|--|---------------|--|--|--|--|
| Valve function (with valve code) | Terminal code | Flow rate | | | |
| | | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | J | 4000 | 2900 | 2900 | 3400 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 4000 | 2900 | 2900 | 3400 |
| 5/2-way, single solenoid (M52-A) | M | 4000 | 2900 | 2900 | 3400 |
| 5/2-way, single solenoid (M52-M) | O | 4000 | 2900 | 2900 | 3400 |
| 5/3-way, closed (P53C) | G | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, exhausted (P53E) | E | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised (P53U) | B | 3600 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 2800 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 3000 ¹⁾ 900 ²⁾ | 2300 ¹⁾ 900 ²⁾ | 2300 ¹⁾ 900 ²⁾ | 2600 ¹⁾ 900 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | K | 3000 | 2400 | 2400 | 2600 |
| 2x3/2-way, single solenoid, open (T32U) | N | 3000 | 2400 | 2400 | 2600 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 3000 | 2400 | 2400 | 2600 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 3000 | 2400 | 2400 | 2600 |
| 2x3/2-way, single solenoid, open (T32F) | P | 3000 | 2400 | 2400 | 2600 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 3000 | 2400 | 2400 | 2600 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 4000 | 2800 | 2800 | 3400 |

- 1) Switching position
2) Mid-position

Valve terminal VTSA/VTSA-F

FESTO

Technical data – Solenoid valve, width 52 mm

| Valve switching times in [ms], width 52 mm, nominal operating voltage 24 V DC/110 V AC | | | | | | | |
|--|---------------|---------|-----|------------|----------|-----|------------|
| Valve function (with valve code) | Terminal code | 24 V DC | | | 110 V AC | | |
| | | On | Off | Changeover | On | Off | Changeover |
| 5/2-way, double solenoid (B52) | J | – | – | 18 | – | – | 35 |
| 5/2-way, double solenoid with dominant signal (D52) | D | – | – | 18 | – | – | 42 |
| 5/2-way, single solenoid (M52-A) | M | 40 | 45 | – | 70 | 90 | – |
| 5/2-way, single solenoid (M52-M) | O | 20 | 60 | – | 25 | 110 | – |
| 5/3-way, closed (P53C) | G | 23 | 60 | 38 | 30 | 100 | 60 |
| 5/3-way, exhausted (P53E) | E | 23 | 60 | 38 | 30 | 100 | 60 |
| 5/3-way, pressurised (P53U) | B | 23 | 60 | 38 | 30 | 100 | 60 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 23 | 60 | 38 | – | – | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 20 | 35 | – | 35 | 70 | – |
| 2x3/2-way, single solenoid, open (T32U) | N | 20 | 35 | – | 35 | 70 | – |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 20 | 35 | – | 35 | 70 | – |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 20 | 35 | – | 50 | 65 | – |
| 2x3/2-way, single solenoid, open (T32F) | P | 20 | 35 | – | 50 | 65 | – |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 20 | 35 | – | 50 | 65 | – |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 14 | 35 | – | 35 | 70 | – |


| Coil characteristics, width 52 mm | | | |
|---|---------------|--|--|
| Valve function (with valve code) | Terminal code | Coil characteristics at 24 V DC in [W] | Coil characteristics at 110/120 V AC in [VA] |
| 5/2-way, double solenoid (B52) | J | 4.6 | 1.6 |
| 5/2-way, double solenoid with dominant signal (D52) | D | 4.6 | 1.0 |
| 5/2-way, single solenoid (M52-A) | M | 4.6 | 1.6 |
| 5/2-way, single solenoid (M52-M) | O | 4.6 | 1.6 |
| 5/3-way, closed (P53C) | G | 4.6 | 1.6 |
| 5/3-way, exhausted (P53E) | E | 4.6 | 1.6 |
| 5/3-way, pressurised (P53U) | B | 4.6 | 1.6 |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) | VG | 4.6 | – |
| 2x3/2-way, single solenoid, closed (T32C) | K | 4.6 | 1.0 |
| 2x3/2-way, single solenoid, open (T32U) | N | 4.6 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32H) | H | 4.6 | 1.0 |
| 2x3/2-way, single solenoid, closed (T32N) | Q | 4.6 | 1.0 |
| 2x3/2-way, single solenoid, open (T32F) | P | 4.6 | 1.0 |
| 2x3/2-way, single solenoid, open/closed (T32W) | R | 4.6 | 1.0 |
| 2x2/2-way, single solenoid, closed (T22C) | VC | 4.6 | 1.0 |

| Maximum current consumption per solenoid coil, width 52 mm | | |
|--|------|-----|
| At nominal voltage 24 V DC (valves with holding current reduction) | | |
| Nominal pick-up current | [mA] | 165 |
| Nominal current following current reduction | [mA] | 35 |
| Time until current reduction | [ms] | 30 |

| Materials | |
|-------------------|------------------------|
| Housing | Die-cast aluminium, PA |
| Seals | HNBR, NBR, HNBR |
| Screws in | Galvanised steel |
| Note on materials | RoHS-compliant |

Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|--|------------|-------|----------|-------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 52 mm | 560831 | VSVA-B-T22C-AZD-D2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 52 mm | 560827 | VSVA-B-T32U-AZD-D2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 52 mm | 560825 | VSVA-B-T32C-AZD-D2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 52 mm | 560829 | VSVA-B-T32H-AZD-D2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 52 mm | 560828 | VSVA-B-T32F-AZD-D2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 52 mm | 560826 | VSVA-B-T32N-AZD-D2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 52 mm | 560830 | VSVA-B-T32W-AZD-D2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 52 mm | 560820 | VSVA-B-M52-AZD-D2-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 52 mm | 560821 | VSVA-B-M52-MZD-D2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 52 mm | 560818 | VSVA-B-B52-ZD-D2-1T1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 52 mm | 560819 | VSVA-B-D52-ZD-D2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 52 mm | 560822 | VSVA-B-P53U-ZD-D2-1T1L |
| | G | 5/3-way valve, mid-position closed | P53C | 52 mm | 560824 | VSVA-B-P53C-ZD-D2-1T1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 52 mm | 560823 | VSVA-B-P53E-ZD-D2-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 52 mm | 8000465 | VSVA-B-P53F-ZD-D2-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR) | | | | | | |
|--|---------------|--|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
| | VC | 2x 2/2-way solenoid valve, single solenoid, normally closed, pneumatic spring return | T22C | 52 mm | 8034967 | VSVA-B-T22C-AZTR-D2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 52 mm | 8034963 | VSVA-B-T32U-AZTR-D2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 52 mm | 8034961 | VSVA-B-T32C-AZTR-D2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 52 mm | 8034965 | VSVA-B-T32H-AZTR-D2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 52 mm | 8034964 | VSVA-B-T32F-AZTR-D2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 52 mm | 8034962 | VSVA-B-T32N-AZTR-D2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 52 mm | 8034966 | VSVA-B-T32W-AZTR-D2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 52 mm | 8034956 | VSVA-B-M52-AZTR-D2-1T1L |
| | O | 5/2-way valve, single solenoid, reset via mechanical spring | M52-M | 52 mm | 8034957 | VSVA-B-M52-MZTR-D2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 52 mm | 8034954 | VSVA-B-B52-ZTR-D2-1T1L |
| | D | 5/2-way solenoid valve, double solenoid, dominant | D52 | 52 mm | 8034955 | VSVA-B-D52-ZTR-D2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 52 mm | 8034958 | VSVA-B-P53U-ZTR-D2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 52 mm | 8034960 | VSVA-B-P53C-ZTR-D2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 52 mm | 8034959 | VSVA-B-P53E-ZTR-D2-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 52 mm | 8034968 | VSVA-B-P53F-ZTR-D2-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, non-detenting (H) | | | | | | |
|---|---------------|--|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 52 mm | 8034982 | VSVA-B-T22C-AZH-D2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 52 mm | 8034978 | VSVA-B-T32U-AZH-D2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 52 mm | 8034976 | VSVA-B-T32C-AZH-D2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 52 mm | 8034980 | VSVA-B-T32H-AZH-D2-1T1LL |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 52 mm | 8034979 | VSVA-B-T32F-AZH-D2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 52 mm | 8034977 | VSVA-B-T32N-AZH-D2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 52 mm | 8034981 | VSVA-B-T32W-AZH-D2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 52 mm | 8034971 | VSVA-B-M52-AZH-D2-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 52 mm | 8034972 | VSVA-B-M52-MZH-D2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 52 mm | 8034969 | VSVA-B-B52-ZH-D2-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 52 mm | 8034970 | VSVA-B-D52-ZH-D2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 52 mm | 8034973 | VSVA-B-P53U-ZH-D2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 52 mm | 8034975 | VSVA-B-P53C-ZH-D2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 52 mm | 8034974 | VSVA-B-P53E-ZH-D2-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 52 mm | 8034983 | VSVA-B-P53F-ZH-D2-1T1L |


Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve 24 V DC

| Ordering data – VSVA solenoid valve with cover cap for MO, covered | | | | | | |
|---|---------------|--|------------|-------|----------|------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 24 V DC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 52 mm | 8034997 | VSVA-B-T22C-AZ-D2-1T1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 52 mm | 8034993 | VSVA-B-T32U-AZ-D2-1T1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 52 mm | 8034991 | VSVA-B-T32C-AZ-D2-1T1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 52 mm | 8034995 | VSVA-B-T32H-AZ-D2-1T1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 52 mm | 8034994 | VSVA-B-T32F-AZ-D2-1T1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 52 mm | 8034992 | VSVA-B-T32N-AZ-D2-1T1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 52 mm | 8034996 | VSVA-B-T32W-AZ-D2-1T1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 52 mm | 8034986 | VSVA-B-M52-AZ-D2-1T1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 52 mm | 8034987 | VSVA-B-M52-MZ-D2-1T1L |
| | J | 5/2-way valve, double solenoid | B52 | 52 mm | 8034984 | VSVA-B-B52-Z-D2-1T1L |
| | D | 5/2-way valve, double solenoid, dominant | D52 | 52 mm | 8034985 | VSVA-B-D52-Z-D2-1T1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 52 mm | 8034988 | VSVA-B-P53U-Z-D2-1T1L |
| | G | 5/3-way solenoid valve, mid-position closed | P53C | 52 mm | 8034990 | VSVA-B-P53C-Z-D2-1T1L |
| | E | 5/3-way solenoid valve, mid-position exhausted | P53E | 52 mm | 8034989 | VSVA-B-P53E-Z-D2-1T1L |
| | VG | 5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed | P53F | 52 mm | 8034998 | VSVA-B-P53F-Z-D2-1T1L |

Valve terminal VTSA/VTSA-F





Ordering data – Solenoid valve 110/120 V AC

| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | | |
|---|---------------|--|------------|-------|----------|--------------------------|
| | Terminal code | Valve function | Valve code | Width | Part No. | Type |
| Solenoid valves, 110/120 V AC | | | | | | |
|  | VC | 2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return | T22C | 52 mm | 560812 | VSVA-B-T22C-AZD-D2-2AT1L |
| | N | 2x 3/2-way valve, single solenoid, normally open | T32U | 52 mm | 560808 | VSVA-B-T32U-AZD-D2-2AT1L |
| | K | 2x 3/2-way valve, single solenoid, normally closed | T32C | 52 mm | 560806 | VSVA-B-T32C-AZD-D2-2AT1L |
| | H | 2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed | T32H | 52 mm | 560810 | VSVA-B-T32H-AZD-D2-2AT1L |
| | P | 2x 3/2-way valve, single solenoid, reverse operation, normally open | T32F | 52 mm | 560809 | VSVA-B-T32F-AZD-D2-2AT1L |
| | Q | 2x 3/2-way valve, single solenoid, reverse operation, normally closed | T32N | 52 mm | 560807 | VSVA-B-T32N-AZD-D2-2AT1L |
| | R | 2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed | T32W | 52 mm | 560811 | VSVA-B-T32W-AZD-D2-2AT1L |
| | M | 5/2-way valve, single solenoid, pneumatic spring return | M52-A | 52 mm | 560801 | VSVA-B-M52-AZD-D2-2AT1L |
| | O | 5/2-way valve, single solenoid, mechanical spring return | M52-M | 52 mm | 560802 | VSVA-B-M52-MZD-D2-2AT1L |
| | J | 5/2-way valve, double solenoid | B52 | 52 mm | 560799 | VSVA-B-B52-ZD-D2-2AT1L |
| | D | 5/2-way valve, double solenoid, with dominant signal | D52 | 52 mm | 560800 | VSVA-B-D52-ZD-D2-2AT1L |
| | B | 5/3-way solenoid valve, mid-position pressurised | P53U | 52 mm | 560803 | VSVA-B-P53U-ZD-D2-2AT1L |
| | G | 5/3-way valve, mid-position closed | P53C | 52 mm | 560805 | VSVA-B-P53C-ZD-D2-2AT1L |
| | E | 5/3-way valve, mid-position exhausted | P53E | 52 mm | 560804 | VSVA-B-P53E-ZD-D2-2AT1L |

Valve terminal VTSA/VTSA-F

Accessories – Pneumatic components

FESTO








| Ordering data | | | | | |
|---|-----------------|---|-------|----------|---------------------|
| | Code | Description | Width | Part No. | Type |
| Right-hand end plate | | | | | |
|  | V | With supply air/exhaust air, internal pilot air supply, G $\frac{1}{2}$ | | 539234 | VABE-S6-1R-G12 |
| | V1 | With supply air/exhaust air, internal pilot air supply, G $\frac{3}{4}$ | | 560837 | VABE-S6-2R-G34 |
| | X | With supply air/exhaust air, external pilot air supply, G $\frac{1}{2}$ | | 539236 | VABE-S6-1RZ-G12 |
| | X1 | With supply air/exhaust air, external pilot air supply, G $\frac{3}{4}$ | | 560839 | VABE-S6-2RZ-G34 |
| End plate with pilot air selector | | | | | |
|  | Y ¹⁾ | Internal pilot air supply | | 539238 | VABE-S6-1RZ-G-B1 |
| | U ¹⁾ | Internal pilot air supply, ducted pilot exhaust air | | | |
| | Z ¹⁾ | External pilot air supply | | | |
| | W ¹⁾ | External pilot air supply, ducted pilot exhaust air | | | |
| Manifold sub-base VTSA, port pattern to ISO 15407-2 and ISO 5599-2 | | | | | |
|  | A | 2 valve positions, 4 addresses, for double solenoid valves | 18 mm | 539224 | VABV-S4-2S-G18-2T2 |
| | B | 2 valve positions, 4 addresses, for double solenoid valves | 26 mm | 539220 | VABV-S4-1S-G14-2T2 |
| | C | 1 valve position, 2 addresses, for double solenoid valves | 42 mm | 542458 | VABV-S2-1S-G38-T2 |
| | D | 1 valve position, 2 addresses, for double solenoid valves | 52 mm | 560841 | VABV-S2-2S-G12-T2 |
| | E | 2 valve positions, 2 addresses, for single solenoid valves | 18 mm | 539226 | VABV-S4-2S-G18-2T1 |
| | F | 2 valve positions, 2 addresses, for single solenoid valves | 26 mm | 539222 | VABV-S4-1S-G14-2T1 |
| | G | 1 valve position, 1 address, for single solenoid valves | 42 mm | 542459 | VABV-S2-1S-G38-T1 |
| | H | 1 valve position, 1 address, for single solenoid valves | 52 mm | 560842 | VABV-S2-2S-G12-T1 |
| Manifold sub-base VTSA-F, optimised for flow rate | | | | | |
|  | A | 2 valve positions, 4 addresses, for double solenoid valves | 18 mm | 546215 | VABV-S4-2HS-G18-2T2 |
| | B | 2 valve positions, 4 addresses, for double solenoid valves | 26 mm | 546211 | VABV-S4-1HS-G14-2T2 |
| | C | 1 valve position, 2 addresses, for double solenoid valves | 42 mm | 546219 | VABV-S2-1HS-G38-T2 |
| | E | 2 valve positions, 2 addresses, for single solenoid valves | 18 mm | 546214 | VABV-S4-2HS-G18-2T1 |
| | F | 2 valve positions, 2 addresses, for single solenoid valves | 26 mm | 546210 | VABV-S4-1HS-G14-2T1 |
| | G | 1 valve position, 1 address, for single solenoid valves | 42 mm | 546218 | VABV-S2-1HS-G38-T1 |

1) Code letter within the order code for a valve terminal configuration.

Valve terminal VTSA/VTSA-F



Accessories – Pneumatic components

FESTO

| Ordering data | | | | | |
|---|------|---|-------|----------|---------------------|
| | Code | Description | Width | Part No. | Type |
| Separator plate | | | | | |
|  | S | Duct separation 1, 3, 5 | | 539228 | VABD-S6-1-P3-C |
|  | T | Duct separation 1 | | 539227 | VABD-S6-1-P1-C |
|  | R | Duct separation 3, 5 | | 539229 | VABD-S6-1-P2-C |
| Seal | | | | | |
|  | - | Between manifold sub-bases | | 668436 | VABD-S6-1-C |
| 90° connection plate | | | | | |
|  | P | Outlet at bottom, connecting thread G1/8 | 18 mm | 539719 | VABF-S4-2-A2G2-G18 |
| | | Outlet at bottom, connecting thread G1/4 | 26 mm | 539721 | VABF-S4-1-A2G2-G14 |
| | | Outlet at bottom, connecting thread G3/8 | 42 mm | 546097 | VABF-S2-1-A1G2-G38 |
| | | Outlet at bottom, connecting thread G1/2 | 52 mm | 555702 | VABF-S2-2-A1G2-G12 |
| Supply plate | | | | | |
|  | L | With exhaust plate, 3/5 common, G1/2 | | 539231 | VABF-S6-1-P1A7-G12 |
| | K | With exhaust port cover, 3/5 separated, G1/2 | | 539230 | VABF-S6-1-P1A6-G12 |
| Vertical supply plate (operating pressure 0.9...10 bar) | | | | | |
|  | ZU | Connecting thread G1/8 Individual compressed air supply, duct 1 | 18 mm | 540173 | VABF-S4-2-P1A3-G18 |
| | | Connecting thread G1/4, Individual compressed air supply, duct 1 | 26 mm | 540171 | VABF-S4-1-P1A3-G14 |
| | | Connecting thread G3/8 Individual compressed air supply, duct 1 | 42 mm | 546093 | VABF-S2-1-P1A3-G38 |
| | | Connecting thread G1/2 Individual compressed air supply, duct 1 | 52 mm | 555786 | VABF-S2-2-P1A3-G12 |
| | ZV | Connecting thread G1/8 Individual compressed air supply, ducts 1 and 14 | 18 mm | 8000693 | VABF-S4-2-P1A14-G18 |
| | | Connecting thread G1/4, Individual compressed air supply, ducts 1 and 14 | 26 mm | 8000689 | VABF-S4-1-P1A14-G14 |
| | | Connecting thread G3/8 Individual compressed air supply, ducts 1 and 14 | 42 mm | 8000536 | VABF-S2-1-P1A14-G38 |
| | | Connecting thread G1/2 Individual compressed air supply, ducts 1 and 14 | 52 mm | 8000549 | VABF-S2-2-P1A14-G12 |

Valve terminal VTSA/VTSA-F



Accessories – Pneumatic components

| Ordering data | | | | | | |
|--|------|------------------------------|------------------------|-------|----------|---------------------|
| | Code | Pressure regulation for port | Regulating range [bar] | Width | Part No. | Type |
| Regulator plate, width 18 mm | | | | | | |
|  | ZA | 1 | 0.5...10 | 18 mm | 540153 | VABF-S4-2-R1C2-C-10 |
| | ZF | 1 | 0.5...6 | 18 mm | 540151 | VABF-S4-2-R1C2-C-6 |
| | ZC | 2 | 2...10 | 18 mm | 540161 | VABF-S4-2-R2C2-C-10 |
| | ZH | 2 | 2...6 | 18 mm | 540159 | VABF-S4-2-R2C2-C-6 |
| | ZB | 4 | 2...10 | 18 mm | 540157 | VABF-S4-2-R3C2-C-10 |
| | ZG | 4 | 2...6 | 18 mm | 540155 | VABF-S4-2-R3C2-C-6 |
| | ZD | 2 and 4 | 2...10 | 18 mm | 540165 | VABF-S4-2-R4C2-C-10 |
| | ZI | 2 and 4 | 2...6 | 18 mm | 540163 | VABF-S4-2-R4C2-C-6 |
| | ZE | 2 and 4, reversible | 0.5...10 | 18 mm | 540169 | VABF-S4-2-R5C2-C-10 |
| | ZJ | 2 and 4, reversible | 0.5...6 | 18 mm | 540167 | VABF-S4-2-R5C2-C-6 |
| | ZL | 2, reversible | 0.5...10 | 18 mm | 546252 | VABF-S4-2-R6C2-C-10 |
| | ZN | 2, reversible | 0.5...6 | 18 mm | 546248 | VABF-S4-2-R6C2-C-6 |
| | ZK | 4, reversible | 0.5...10 | 18 mm | 546254 | VABF-S4-2-R7C2-C-10 |
| | ZM | 4, reversible | 0.5...6 | 18 mm | 546250 | VABF-S4-2-R7C2-C-6 |
| Regulator plate, width 26 mm | | | | | | |
|  | ZA | 1 | 0.5...10 | 26 mm | 540154 | VABF-S4-1-R1C2-C-10 |
| | ZF | 1 | 0.5...6 | 26 mm | 540152 | VABF-S4-1-R1C2-C-6 |
| | ZC | 2 | 2...10 | 26 mm | 540162 | VABF-S4-1-R2C2-C-10 |
| | ZH | 2 | 2...6 | 26 mm | 540160 | VABF-S4-1-R2C2-C-6 |
| | ZB | 4 | 2...10 | 26 mm | 540158 | VABF-S4-1-R3C2-C-10 |
| | ZG | 4 | 2...6 | 26 mm | 540156 | VABF-S4-1-R3C2-C-6 |
| | ZD | 2 and 4 | 2...10 | 26 mm | 540166 | VABF-S4-1-R4C2-C-10 |
| | ZI | 2 and 4 | 2...6 | 26 mm | 540164 | VABF-S4-1-R4C2-C-6 |
| | ZE | 2 and 4, reversible | 0.5...10 | 26 mm | 540170 | VABF-S4-1-R5C2-C-10 |
| | ZJ | 2 and 4, reversible | 0.5...6 | 26 mm | 540168 | VABF-S4-1-R5C2-C-6 |
| | ZL | 2, reversible | 0.5...10 | 26 mm | 546251 | VABF-S4-1-R6C2-C-10 |
| | ZN | 2, reversible | 0.5...6 | 26 mm | 546247 | VABF-S4-1-R6C2-C-6 |
| | ZK | 4, reversible | 0.5...10 | 26 mm | 546253 | VABF-S4-1-R7C2-C-10 |
| | ZM | 4, reversible | 0.5...6 | 26 mm | 546249 | VABF-S4-1-R7C2-C-6 |

Valve terminal VTSA/VTSA-F

Accessories – Pneumatic components




FESTO

| Ordering data | | | | | | |
|--|------|------------------------------|------------------------|-------|----------|---------------------|
| | Code | Pressure regulation for port | Regulating range [bar] | Width | Part No. | Type |
| Regulator plate, width 42 mm | | | | | | |
|  | ZA | 1 | 0.5...10 | 42 mm | 546084 | VABF-S2-1-R1C2-C-10 |
| | ZF | 1 | 0.5...6 | 42 mm | 546083 | VABF-S2-1-R1C2-C-6 |
| | ZC | 2 | 1.0...10 | 42 mm | 546088 | VABF-S2-1-R2C2-C-10 |
| | ZH | 2 | 1.0...6 | 42 mm | 546087 | VABF-S2-1-R2C2-C-6 |
| | ZB | 4 | 1.0...10 | 42 mm | 546086 | VABF-S2-1-R3C2-C-10 |
| | ZG | 4 | 0.5...6 | 42 mm | 546085 | VABF-S2-1-R3C2-C-6 |
| | ZD | 2 and 4 | 1.0...10 | 42 mm | 546090 | VABF-S2-1-R4C2-C-10 |
| | ZI | 2 and 4 | 1.0...6 | 42 mm | 546089 | VABF-S2-1-R4C2-C-6 |
| | ZE | 2 and 4, reversible | 0.5...10 | 42 mm | 546092 | VABF-S2-1-R5C2-C-10 |
| | ZJ | 2 and 4, reversible | 0.5...6 | 42 mm | 546091 | VABF-S2-1-R5C2-C-6 |
| | ZL | 2, reversible | 0.5...10 | 42 mm | 546832 | VABF-S2-1-R6C2-C-10 |
| | ZN | 2, reversible | 0.5...6 | 42 mm | 546831 | VABF-S2-1-R6C2-C-6 |
| | ZK | 4, reversible | 0.5...10 | 42 mm | 546834 | VABF-S2-1-R7C2-C-10 |
| | ZM | 4, reversible | 0,5...6 | 42 mm | 546833 | VABF-S2-1-R7C2-C-6 |
| Regulator plate, width 52 mm | | | | | | |
|  | ZA | 1 | 0.5...10 | 52 mm | 555772 | VABF-S2-2-R1C2-C-10 |
| | ZF | 1 | 0.5...6 | 52 mm | 555771 | VABF-S2-2-R1C2-C-6 |
| | ZC | 2 | 1.0...10 | 52 mm | 555774 | VABF-S2-2-R2C2-C-10 |
| | ZH | 2 | 1.0...6 | 52 mm | 555773 | VABF-S2-2-R2C2-C-6 |
| | ZB | 4 | 1.0...10 | 52 mm | 555776 | VABF-S2-2-R3C2-C-10 |
| | ZG | 4 | 1.0...6 | 52 mm | 555775 | VABF-S2-2-R3C2-C-6 |
| | ZD | 2 and 4 | 1.0...10 | 52 mm | 555778 | VABF-S2-2-R4C2-C-10 |
| | ZI | 2 and 4 | 1.0...6 | 52 mm | 555777 | VABF-S2-2-R4C2-C-6 |
| | ZE | 2 and 4, reversible | 0.5...10 | 52 mm | 555780 | VABF-S2-2-R5C2-C-10 |
| | ZJ | 2 and 4, reversible | 0.5...6 | 52 mm | 555779 | VABF-S2-2-R5C2-C-6 |
| | ZL | 2, reversible | 0.5...10 | 52 mm | 555782 | VABF-S2-2-R6C2-C-10 |
| | ZN | 2, reversible | 0.5...6 | 52 mm | 555781 | VABF-S2-2-R6C2-C-6 |
| | ZK | 4, reversible | 0.5...10 | 52 mm | 555784 | VABF-S2-2-R7C2-C-10 |
| | ZM | 4, reversible | 0.5...6 | 52 mm | 555783 | VABF-S2-2-R7C2-C-6 |

Valve terminal VTSA/VTSA-F

Accessories – Pneumatic components

FESTO


| Ordering data | | | | | | |
|---|------|------------------------------|------------------------|-------|----------|----------------------|
| | Code | Pressure regulation for port | Regulating range [bar] | Width | Part No. | Type |
| Regulator plate for valves with symmetrical coil layout, width 18 mm | | | | | | |
|  | ZAY | 1 | 0.5...10 | 18 mm | 560756 | VABF-S4-2-R1C2-C-10E |
| | ZFY | 1 | 0.5...6 | 18 mm | 560758 | VABF-S4-2-R1C2-C-6E |
| | ZCY | 2 | 2...10 | 18 mm | 560763 | VABF-S4-2-R2C2-C-10E |
| | ZHY | 2 | 2...6 | 18 mm | 560765 | VABF-S4-2-R2C2-C-6E |
| | ZDY | 2 and 4 | 2...10 | 18 mm | 560767 | VABF-S4-2-R4C2-C-10E |
| | ZIY | 2 and 4 | 2...6 | 18 mm | 560769 | VABF-S4-2-R4C2-C-6E |
| | ZEY | 2 and 4, reversible | 0.5...10 | 18 mm | 560771 | VABF-S4-2-R5C2-C-10E |
| | ZJY | 2 and 4, reversible | 0.5...6 | 18 mm | 560773 | VABF-S4-2-R5C2-C-6E |
| | ZLY | 2, reversible | 0.5...10 | 18 mm | 560775 | VABF-S4-2-R6C2-C-10E |
| | ZNY | 2, reversible | 0.5...6 | 18 mm | 560777 | VABF-S4-2-R6C2-C-6E |
| Regulator plate for valves with symmetrical coil layout, width 26 mm | | | | | | |
|  | ZAY | 1 | 0.5...10 | 26 mm | 560757 | VABF-S4-1-R1C2-C-10E |
| | ZFY | 1 | 0.5...6 | 26 mm | 549876 | VABF-S4-1-R1C2-C-6E |
| | ZCY | 2 | 2...10 | 26 mm | 560764 | VABF-S4-1-R2C2-C-10E |
| | ZHY | 2 | 2...6 | 26 mm | 560766 | VABF-S4-1-R2C2-C-6E |
| | ZDY | 2 and 4 | 2...10 | 26 mm | 560768 | VABF-S4-1-R4C2-C-10E |
| | ZIY | 2 and 4 | 2...6 | 26 mm | 560770 | VABF-S4-1-R4C2-C-6E |
| | ZEY | 2 and 4, reversible | 0.5...10 | 26 mm | 560772 | VABF-S4-1-R5C2-C-10E |
| | ZJY | 2 and 4, reversible | 0.5...6 | 26 mm | 560774 | VABF-S4-1-R5C2-C-6E |
| | ZLY | 2, reversible | 0.5...10 | 26 mm | 560776 | VABF-S4-1-R6C2-C-10E |
| | ZNY | 2, reversible | 0.5...6 | 26 mm | 560778 | VABF-S4-1-R6C2-C-6E |
| Regulator plate for valves with symmetrical coil layout, width 42 mm ¹⁾ | | | | | | |
|  | ZAY | 1 | 0.5...10 | 42 mm | – | VABF-S2-1-R1C2-C-10E |
| | ZFY | 1 | 0.5...6 | 42 mm | – | VABF-S2-1-R1C2-C-6E |
| | ZCY | 2 | 0.5...10 | 42 mm | – | VABF-S2-1-R2C2-C-10E |
| | ZHY | 2 | 0.5...6 | 42 mm | – | VABF-S2-1-R2C2-C-6E |
| | ZBY | 4 | 0.5...10 | 42 mm | – | VABF-S2-1-R3C2-C-10E |
| | ZGY | 4 | 0.5...6 | 42 mm | – | VABF-S2-1-R3C2-C-6E |
| | ZDY | 2 and 4 | 0.5...10 | 42 mm | – | VABF-S2-1-R4C2-C-10E |
| | ZIY | 2 and 4 | 0.5...6 | 42 mm | – | VABF-S2-1-R4C2-C-6E |
| | ZEY | 2 and 4, reversible | 0.5...10 | 42 mm | – | VABF-S2-1-R5C2-C-10E |
| | ZJY | 2 and 4, reversible | 0.5...6 | 42 mm | – | VABF-S2-1-R5C2-C-6E |
| | ZLY | 2, reversible | 0.5...10 | 42 mm | – | VABF-S2-1-R6C2-C-10E |
| | ZNY | 2, reversible | 0.5...6 | 42 mm | – | VABF-S2-1-R6C2-C-6E |
| | ZKY | 4, reversible | 0.5...10 | 42 mm | – | VABF-S2-1-R7C2-C-10E |
| | ZMY | 4, reversible | 0.5...6 | 42 mm | – | VABF-S2-1-R7C2-C-6E |

1) These functions are available via the pressure regulator configurator VABF-S2 for width 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) only.


Valve terminal VTSA/VTSA-F

Accessories – Pneumatic components

FESTO

















| Ordering data | | | | | | |
|--|------|------------------------------|------------------------|-------|----------|----------------------|
| | Code | Pressure regulation for port | Regulating range [bar] | Width | Part No. | Type |
| Regulator plate for valves with symmetrical coil layout, width 52 mm ¹⁾ | | | | | | |
|  | ZAY | 1 | 0.5...10 | 52 mm | – | VABF-S2-2-R1C2-C-10E |
| | ZFY | 1 | 0.5...6 | 52 mm | – | VABF-S2-2-R1C2-C-6E |
| | ZCY | 2 | 0.5...10 | 52 mm | – | VABF-S2-2-R2C2-C-10E |
| | ZHY | 2 | 0.5...6 | 52 mm | – | VABF-S2-2-R2C2-C-6E |
| | ZBY | 4 | 0.5...10 | 52 mm | – | VABF-S2-2-R3C2-C-10E |
| | ZGY | 4 | 0.5...6 | 52 mm | – | VABF-S2-2-R3C2-C-6E |
| | ZDY | 2 and 4 | 0.5...10 | 52 mm | – | VABF-S2-2-R4C2-C-10E |
| | ZIY | 2 and 4 | 0.5...6 | 52 mm | – | VABF-S2-2-R4C2-C-6E |
| | ZEY | 2 and 4, reversible | 0.5...10 | 52 mm | – | VABF-S2-2-R5C2-C-10E |
| | ZJY | 2 and 4, reversible | 0.5...6 | 52 mm | – | VABF-S2-2-R5C2-C-6E |
| | ZLY | 2, reversible | 0.5...10 | 52 mm | – | VABF-S2-2-R6C2-C-10E |
| | ZNY | 2, reversible | 0.5...6 | 52 mm | – | VABF-S2-2-R6C2-C-6E |
| | ZKY | 4, reversible | 0.5...10 | 52 mm | – | VABF-S2-2-R7C2-C-10E |
| | ZMY | 4, reversible | 0.5...6 | 52 mm | – | VABF-S2-2-R7C2-C-6E |

1) These functions are available via the pressure regulator configurator VABF-S2 for width 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) only.

| Ordering data | | | | | |
|---|--|---|--------|------------------|------------------|
| | Code | Description | Width | Part No. | Type |
| Pressure gauge | | | | | |
|  | T | With cartridge connection for regulator, 10 bar, scale bar/psi, display range 0...16 bar/0...240 psi, for regulator plate code ZA, ZB, ZC, ZD, ZE, ZK, ZL | 18 mm | 543487 | PAGN-26-16-P10 |
| | | | 26 mm | | |
| | | | 42 mm | 548010 | PAGN-40-16-P10 |
| | | | 52 mm | | |
| | U | With cartridge connection for regulator, 6 bar, scale bar/psi, display range 0...10 bar/0...145 psi, for regulator plate code ZF, ZG, ZH, ZI, ZJ, ZM, ZN | 18 mm | 543488 | PAGN-26-10-P10 |
| | | | 26 mm | | |
| | | | 42 mm | 548009 | PAGN-40-10-P10 |
| | | | 52 mm | | |
| | WT | With cartridge connection for regulator, 10 bar, scale MPa, display range 0...16 bar/0...1.6 MPa, for regulator plate code ZA, ZB, ZC, ZD, ZE, ZK, ZL | 18 mm | 563735 | PAGN-26-1.6M-P10 |
| | | | 26 mm | | |
| | | | 42 mm | 563737 | PAGN-40-1.6M-P10 |
| | | | 52 mm | | |
| | WU | With cartridge connection for regulator, 6 bar, scale MPa, display range 0...16 bar/0...1 MPa, for regulator plate code ZF, ZG, ZH, ZI, ZJ, ZM, ZN | 18 mm | 563736 | PAGN-26-1M-P10 |
| | | | 26 mm | | |
| | | | 42 mm | 563738 | PAGN-40-1M-P10 |
| | | | 52 mm | | |
| | VT | With cartridge connection for regulator, 10 bar, scale psi/bar, display range 0...16 bar/0...232 psi, for regulator plate code ZA, ZB, ZC, ZD, ZE, ZK, ZL | 18 mm | 563731 | PAGN-26-232P-P10 |
| | | | 26 mm | | |
| 42 mm | | | 563733 | PAGN-40-232P-P10 | |
| PS | With cartridge connection for regulator, 6 bar, scale psi/bar, display range 0...10 bar/0...145 psi, for regulator plate code ZF, ZG, ZH, ZI, ZJ, ZM, ZN | 18 mm | 563732 | PAGN-26-145P-P10 | |
| | | 26 mm | | | |
| | | 42 mm | 563734 | PAGN-40-145P-P10 | |
| | | 52 mm | | | |

Valve terminal VTSA/VTSA-F

Accessories – Pneumatic components

| Ordering data | | | | |
|---|------|--|-----------|---|
| | Code | Description | Part No. | Type |
| Cartridge for regulator plate | | | | |
|  | – | For tubing O.D. 4 mm | 1 piece | 172972 QSP10-4 |
|  | – | Adapter for pressure gauge (allows products with threaded connection G1/8 to be attached to the cartridge connection) | 6 pieces | 565811 QSP10-G1/8 |
| Flow control plate | | | | |
|  | X | Controls the flow of exhaust air downstream of the valve to ducts 3 and 5 | 18 mm | 540176 VABF-S4-2-F1B1-C |
| | | | 26 mm | 540175 VABF-S4-1-F1B1-C |
| | | | 42 mm | 546095 VABF-S2-1-F1B1-C |
| | | | 52 mm | 555789 VABF-S2-2-F1B1-C |
| Vertical pressure shut-off plate | | | | |
|  | ZT | 3/2-way solenoid valve for shutting off the operating pressure at the valve position Pressure separation can be shut off on the assembled valve | 18 mm | 542884 VABF-S4-2-L1D1-C |
| | | | 26 mm | 542885 VABF-S4-1-L1D1-C |
| | | | 42 mm | 546096 VABF-S2-1-L1D1-C |
| | | | 52 mm | 555791 VABF-S2-2-L1D1-C |
|  | ZS | 3/2-way solenoid valve for shutting off the operating pressure at the valve position Pressure separation can be shut off on the assembled valve using a key | 18 mm | 8001178 VABF-S4-2-L1D2-C  |
| | | | 26 mm | 8001179 VABF-S4-1-L1D2-C  |
| Cover | | | | |
|  | L | Blanking plate for vacant position | 18 mm | 539213 VABB-S4-2-WT |
| | | | 26 mm | 539212 VABB-S4-1-WT |
| | | | 42 mm | 543186 VABB-S2-1-WT |
| | | | 52 mm | 560845 VABB-S2-2-WT |
|  | N | Cover cap for manual override, non-detenting | 10 pieces | 541010 VAMC-S6-CH |
|  | V | Cover cap for manual override, concealed | 10 pieces | 541011 VAMC-S6-CS |
|  | A | Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-time assembly only) | 10 pieces | 4105147 VAMC-B-S6-CTR  |
|  | – | End cap for electrical interlinking module (with individual connection), size 18 mm and 26 mm | 10 pieces | 547713 VABD-S4-E-C |
|  | – | Seal (with individual connection), size 42 mm and 52 mm | 2 pieces | 571343 VABD-S2-1-S-C |
| Accessory for manual override, heavy duty | | | | |
|  | – | Coded key (accessory) for actuating cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR) | 1 piece | 1662543 AHB-MEB-B  |









 **Note**

There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.

Valve terminal VTSA/VTSA-F





Accessories – Electrical components

FESTO

| Ordering data | | | | |
|---|------|---|----------|-----------------------|
| | Code | Description | Part No. | Type |
| Multi-pin node | | | | |
|  | T | Terminal strip, 36-pin | 543412 | VABE-S6-1LF-C-M1-C36M |
| | MP1 | Sub-D plug, 37-pin | 543414 | VABE-S6-1LT-C-M1-S37 |
| | MP4 | Round plug, 19-pin | 543415 | VABE-S6-1LF-C-M1-R19 |
| Individual electrical connection | | | | |
|  | -MP2 | Multi-pin node with individual connection M12, 6-way | 549046 | VABE-S6-LT-C-S6-R5 |
| | -MP3 | Multi-pin node with individual connection M12, 10-way | 549047 | VABE-S6-LT-C-S10-R5 |
|  | - | Cover for individual connection M12, 6-way | 549048 | VAEM-S6-C-S6-R5 |
| | - | Cover for individual connection M12, 10-way | 549049 | VAEM-S6-C-S10-R5 |
| Pneumatic interface | | | | |
|  | - | For electrical terminal CPX in plastic design | 543416 | VABA-S6-1-X1 |
|  | - | For electrical terminal CPX in metal design | 550663 | VABA-S6-1-X2 |
|  | - | For electrical terminal CPX in metal design, with changed diagnostic function | 573613 | VABA-S6-1-X2-D |
| Electrical interface for AS-Interface | | | | |
|  | - | 4 inputs/4 outputs | 549042 | VABE-S6-1LF-C-A4-E |
| | - | 8 inputs/8 outputs | 549043 | VABE-S6-1LF-C-A8-E |
| AS-Interface module | | | | |
|  | - | 4 inputs/4 outputs | 549044 | VAEM-S6-S-FAS-4-4E |
| | - | 8 inputs/8 outputs | 549045 | VAEM-S6-S-FAS-8-8E |

Valve terminal VTSA/VTSA-F









Accessories – Electrical components

| Ordering data | | | | | |
|---|------|--|----------|-----------------------|------------------------|
| | Code | Description | Part No. | Type | |
| Connection block for AS-Interface | | | | | |
|  | X | 4x M12, 5-pin, double, socket | 195704 | CPX-AB-4-M12x2-5POL | |
| | GW | 4x M12, 5-pin, socket, metal thread | 541254 | CPX-AB-4-M12x2-5POL-R | |
| | R | 8x M8, 3-pin, socket | 195706 | CPX-AB-8-M8-3POL | |
| | J | 8x spring-loaded terminal, Cage Clamp®, 4-pin | 195708 | CPX-AB-8-KL-4POL | |
| | H | 4xHarax®, 4-pin, socket | 525636 | CPX-AB-4-HAR-4POL | |
| | B | Sub-D, 25-pin, socket | 525676 | CPX-AB-1-SUB-BU-25POL | |
| Connecting cable with Sub-D plug socket (polyurethane, IP65) | | | | | |
|  | GA | Connecting cable for max. 8 solenoid coils, 10-pin | 2.5 m | 539240 | NEBV-S1W37-E-2.5-LE10 |
| | GB | | 5 m | 539241 | NEBV-S1W37-E-5-LE10 |
| | GC | | 10 m | 539242 | NEBV-S1W37-E-10-LE10 |
| | GD | Connecting cable for max. 22 solenoid coils, 26-pin | 2.5 m | 539243 | NEBV-S1W37-E-2.5-LE26 |
| | GE | | 5 m | 539244 | NEBV-S1W37-E-5-LE26 |
| | GF | | 10 m | 539245 | NEBV-S1W37-E-10-LE26 |
| | GG | Connecting cable for max. 32 solenoid coils, 37-pin | 2.5 m | 539246 | NEBV-S1W37-K-2.5-LE37 |
| | GH | | 5 m | 539247 | NEBV-S1W37-K-5-LE37 |
| | GI | | 10 m | 539248 | NEBV-S1W37-K-10-LE37 |
| Connecting cable with Sub-D plug socket (polyvinyl chloride, IP65) | | | | | |
|  | GK | Connecting cable for max. 8 solenoid coils, 10-pin, cable properties (standard) | 2.5 m | 543271 | NEBV-S1W37-KM-2.5-LE10 |
| | GL | | 5 m | 543272 | NEBV-S1W37-KM-5-LE10 |
| | GM | | 10 m | 543273 | NEBV-S1W37-KM-10-LE10 |
| | GN | Connecting cable for max. 23 solenoid coils, 27-pin, cable properties (standard) | 2.5 m | 543274 | NEBV-S1W37-KM-2.5-LE27 |
| | GO | | 5 m | 543275 | NEBV-S1W37-KM-5-LE27 |
| | GP | | 10 m | 543276 | NEBV-S1W37-KM-10-LE27 |
| | GQ | Connecting cable for max. 32 solenoid coils, 37-pin, cable properties (standard) | 2.5 m | 543277 | NEBV-S1W37-KM-2.5-LE37 |
| | GR | | 5 m | 543278 | NEBV-S1W37-KM-5-LE37 |
| | GS | | 10 m | 543279 | NEBV-S1W37-KM-10-LE37 |
| Cover for multi-pin plug | | | | | |
|  | - | For user configuration | 545974 | NECV-S1W37 | |

Valve terminal VTSA/VTSA-F

Accessories – General


FESTO





| Ordering data | | | | | |
|--|------|--|------------|----------------|------------------------|
| | Code | Description | Part No. | Type | |
| Inscription label holder/inscription labels | | | | | |
|  | B | Clip-on inscription label holder for valve cap | 5 pieces | 540888 | ASCF-T-S6 |
|  | T | Inscription label holder for manifold blocks | 5 pieces | 540889 | ASCF-M-S6 |
| | TD | Inscription label holder for manifold blocks, size 52 mm | 5 pieces | 562577 | ASCF-M-S2-2 |
|  | – | Inscription label (20 labels in frames) | 20 pieces | 18182 | IBS-9x20 |
| | – | Inscription label for pressure zone separation | 3x4 pieces | 8003303 | ASLR-L-S6-2016 |
| | – | <ul style="list-style-type: none"> • 4 inscription labels, duct 1/3/5 blocked • 4 inscription labels, duct 1 blocked • 4 inscription labels, duct 3/5 blocked | | | |
| H-rail mounting | | | | | |
|  | – | VTSA and VTSA-F | 3 pieces | 526032 | CPX-CPA-BG-NRH |
| Wall mounting | | | | | |
|  | – | Mounting bracket with mounting hole for screw M5 | 5 pieces | 539214 | VAME-S6-10-W |
|  | U | Mounting bracket with mounting hole for screw M4 and mounting hole for screw M6 | 1 piece | 567038 | VAME-S6-W-M46 |
|  | AW | Mounting bracket for length compensation on the CPX side when mounting using support system Set comprising 1 angle bracket and 2 screws | 1 piece | 2721419 | CPX-M-BG-VT-2X |
| User documentation | | | | | |
|  | D | Manual for valve terminal VTSA/VTSA-F | German | 538922 | P.BE-VTSA-44-DE |
| | E | | English | 538923 | P.BE-VTSA-44-EN |
| | S | | Spanish | 538924 | P.BE-VTSA-44-ES |
| | F | | French | 538925 | P.BE-VTSA-44-FR |
| | I | | Italian | 538926 | P.BE-VTSA-44-IT |
| Pneumatic connection accessories | | | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms:</p> <p>Internet → connection technology, silencer, blanking plug</p> | | | | | |


Valve terminal VTSA/VTSA-F

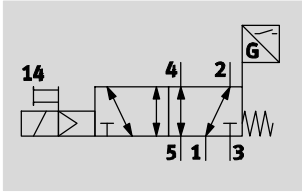Technical data – Solenoid valve with switching position sensing

Function¹⁾



-  - Flow rate
Up to 1100 l/min
-  - Valve width
18 mm
26 mm
-  - Voltage
24 V DC
-  - Operating pressure
3 ... 10 bar

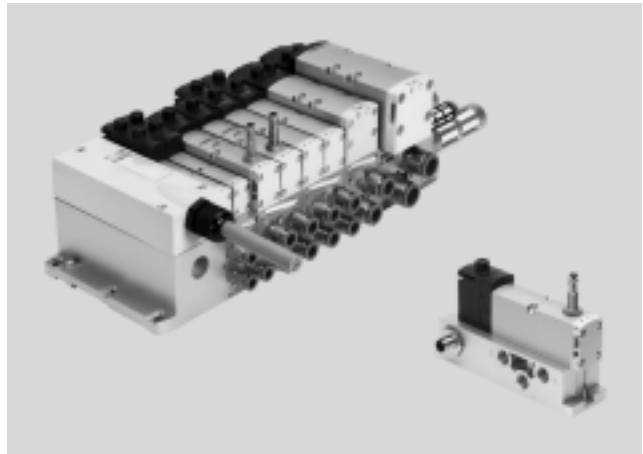

ISO valves with switching position sensing for safety-related pneumatic components

Function


The single solenoid 5/2-way valve with spring return in width 18 mm and 26 mm features valve diagnostics. Designed as a plug-in or individual connection valve with pilot valves to ISO 15218 and square plug type C. The normal position of the

piston spool valve is monitored by the inductive sensor. This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control

system. This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1. The control block has been developed and manufactured in accordance with the basic and

proven safety principles of EN ISO 13849-2. This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

Decentralised individual connection variant




Valve on individual sub-base (square plug or plug-in), with integrated piston position sensing.

The electrical connection is established either via a standardised 4-pin M12 plug 24 V DC (ISO 15407-2), a 4-pin spring-loaded terminal or a cable (open end) 24 V DC/110 V AC,

which can be configured by the user. The individual sub-base can be supplied with internal or external pilot air depending on the version.

Variant for valve terminal VTSA/VTSA-F



The valves with integrated piston position sensing in plug-in design for valve terminal VTSA/VTSA-F can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

Pilot air supply:
The valve terminal can be supplied with internal or external pilot air via the various end plate variants.

-  - Note

Valves in plug-in design always get their pilot air from duct 14 in the manifold sub-base.

1) The circuit symbol represents a valve with a proximity sensor with switching output signal with an N/O contact. In accordance with ISO 1219-1, this symbol applies to both N/O contacts and N/C contacts. The switching element function of the sensors used here is designed as an N/C contact.

-  - Note

Pilot exhaust air port 12 vents directly at the valve, without a connection. If the customer requests a "turned seal", exhaust air is vented at the end plates of the valve terminal, which does not conform to the ISO standard.

Valve terminal VTSA/VTSA-F

Data sheet – Solenoid valve with switching position sensing

| Safety characteristics | |
|---|---|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Switching frequency min. 1/week |
| CE marking (see declaration of conformity) | In accordance with EU EMC Directive ¹⁾ |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

| Safety characteristics | | |
|---|---|---|
| Valve function 5/2-way, single solenoid | Test pulses | |
| | Max. positive test pulse with 0 signal [μ s] | Max. negative test pulse with 1 signal [μ s] |
| VSVA-B-M52-MZD- ... | 1200 | 1100 |
| VSVA-B-M52-MZ- ... | 1000 | 800 |

| General technical data | | | |
|-------------------------------------|---|----------------------------|--------------------------|
| Valve | VSVA-B-M52-MZD-A2-1T1L-... | VSVA-B-M52-MZD-A1-1T1L-... | VSVA-B-M52-MZ-A1-1C1-... |
| Width | 18 mm | 26 mm | 26 mm |
| Conforms to | ISO 15407-2 | | ISO 15407-1 |
| Design | Piston spool valve | | |
| Sealing principle | Soft | | |
| Actuation type | Electric | | |
| Type of control | Piloted | | |
| Exhaust function, with flow control | Via individual sub-base, via flow control plate | | |
| Lubrication | Life-time lubrication | | |
| Type of mounting | Via through-hole, on manifold sub-base | | |
| Mounting position | Any | | |
| Manual override | Covered | | |
| Individual sub-base | | | →193 |
| Valve terminal | | | →64 |

| Standard nominal flow rate [l/min] | | | | |
|------------------------------------|-----------|------------------------------|--------------------------------|------------------------------|
| Valve function | Flow rate | | | |
| | Valve | Valve on valve terminal VTSA | Valve on valve terminal VTSA-F | Valve on individual sub-base |
| VSVA-B-M52-MZ-A1-1C1-ANC | 1400 | 1100 | – | 1100 |
| VSVA-B-M52-MZ-A1-1C1-ANP | 1400 | 1100 | – | 1100 |
| VSVA-B-M52-MZ-A1-1C1-APC | 1400 | 1100 | – | 1100 |
| VSVA-B-M52-MZ-A1-1C1-APP | 1400 | 1100 | – | 1100 |
| VSVA-B-M52-MZD-A1-1T1L-ANC | 1400 | 1100 | 1350 | 1200 |
| VSVA-B-M52-MZD-A1-1T1L-ANP | 1400 | 1100 | 1350 | 1200 |
| VSVA-B-M52-MZD-A1-1T1L-APC | 1400 | 1100 | 1350 | 1200 |
| VSVA-B-M52-MZD-A1-1T1L-APP | 1400 | 1100 | 1350 | 1200 |
| VSVA-B-M52-MZD-A1-1T1L-APX-0.5 | 1400 | 1100 | 1350 | 1200 |
| VSVA-B-M52-MZD-A2-1T1L-ANP | 750 | 550 | 700 | 600 |
| VSVA-B-M52-MZD-A2-1T1L-APP | 750 | 550 | 700 | 600 |
| VSVA-B-M52-MZD-A2-1T1L-APX-0.5 | 750 | 550 | 700 | 600 |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve with switching position sensing

| Valve switching times [ms] | | | | |
|----------------------------|-----|----------------------------|----------------------------|--------------------------|
| Valve | | VSVA-B-M52-MZD-A2-1T1L-... | VSVA-B-M52-MZD-A1-1T1L-... | VSVA-B-M52-MZ-A1-1C1-... |
| Width | | 18 mm | 26 mm | 26 mm |
| Valve switching times | On | 12 | 20 | 21 |
| | Off | 38 | 54 | 41 |
| Sensor switching times | On | 32 | 60 | 60 |
| | Off | 9 | 11 | 11 |

| Electrical data – Valve | | | | |
|----------------------------------|--------|--|----------------------------|---|
| Valve | | VSVA-B-M52-MZD-A2-1T1L-... | VSVA-B-M52-MZD-A1-1T1L-... | VSVA-B-M52-MZ-A1-1C1-... |
| Width | | 18 mm | 26 mm | 26 mm |
| Electrical connection | | 4-pin plug to ISO 15407-2 | | Plug to EN 175301-803, type C, without protective conductor |
| Nominal operating voltage | [V DC] | 24 | | |
| Permissible voltage fluctuations | [%] | ±10 | | -15/+10 |
| Surge resistance | [kV] | 2.5 | | |
| Degree of contamination | | 3 | | |
| Power consumption | [W] | 1.6 | | 1.8 |
| Switching position sensing | | Normal position via sensor | | |
| Duty cycle ED | [%] | 100 | | |
| Protection class to EN 60529 | | IP65, NEMA 4 (for all types of signal transmission in assembled state) | | |

| Electrical data – Sensor | |
|---|----------------------------------|
| Electrical connection | Cable, 3-wire |
| | Plug M8x1, 3-pin |
| Cable length | [m] 2.5 |
| Switching output | PNP or NPN |
| Switching element function | N/C contact |
| Switching status display | Yellow LED |
| Operating voltage range | [V DC] 10 ... 30 |
| Residual ripple | [%] ±10 |
| Sensor idle current | [mA] ≤10 |
| Max. output current | [mA] 200 |
| Voltage drop | [V] ≤2 |
| Max. switching frequency | [Hz] 5,000 |
| Protection against short circuit | Pulsed |
| Protection against polarity reversal for sensor | For all electrical connections |
| Measuring principle | Inductive |
| Switching position sensing | Valve normal position via sensor |

Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve with switching position sensing

FESTO

| Operating and environmental conditions | |
|--|--|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/ pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure [bar] | −0.9 ... 10 |
| Operating pressure for valve terminal with internal pilot air supply [bar] | 3 ... 10 |
| Pilot pressure [bar] | 3 ... 10 |
| Ambient temperature [°C] | −5 ... +50 |
| Temperature of medium [°C] | −5 ... +50 |
| Note on materials | RoHS-compliant |
| Noise level LpA [dB(A)] | 85 |
| CE marking (see declaration of conformity) | To EU EMC Directive ¹⁾ |
| Fire protection classification to UL 94 | HB |
| Approval certificate | c UL us – Recognized (OL), only for valve function (M52-MZD) |
| | C-Tick |
| | CSA (OL), only for valve function (M52-MZD) |

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

| Materials | |
|----------------------------|---|
| Sub-base/manifold sub-base | Die-cast aluminium |
| Valve | Die-cast aluminium, reinforced polyamide |
| Seals | Nitrile rubber, elastomer (support made of steel) |
| Screws | Galvanised steel |
| Sensor housing | High-alloy stainless steel |
| Sensor cable sheath | Polyurethane |

| Product weight | | |
|--------------------------------|-------|-------|
| Width | 18 mm | 26 mm |
| 5/2-way solenoid valve type | | |
| VSVA-B-M52-MZD-A2-1T1L-APX-0,5 | 157 g | – |
| VSVA-B-M52-MZD-A2-1T1L-APP | 140 g | – |
| VSVA-B-M52-MZD-A2-1T1L-ANP | 140 g | – |
| VSVA-B-M52-MZD-A1-1T1L-APC | – | 307 g |
| VSVA-B-M52-MZD-A1-1T1L-APP | – | 264 g |
| VSVA-B-M52-MZ-A1-1C1-APC | – | 332 g |
| VSVA-B-M52-MZ-A1-1C1-APP | – | 289 g |
| VSVA-B-M52-MZD-A1-1T1L-ANC | – | 307 g |
| VSVA-B-M52-MZD-A1-1T1L-ANP | – | 264 g |
| VSVA-B-M52-MZ-A1-1C1-ANC | – | 332 g |
| VSVA-B-M52-MZ-A1-1C1-ANP | – | 289 g |
| VSVA-B-M52-MZD-A1-1T1L-APX-0,5 | – | 281 g |
| Individual connection | | |
| Individual sub-base | 192 g | 302 g |


Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve with switching position sensing

Dimensions

Download CAD data → www.festo.com

Solenoid valve with sensor, width 26 mm

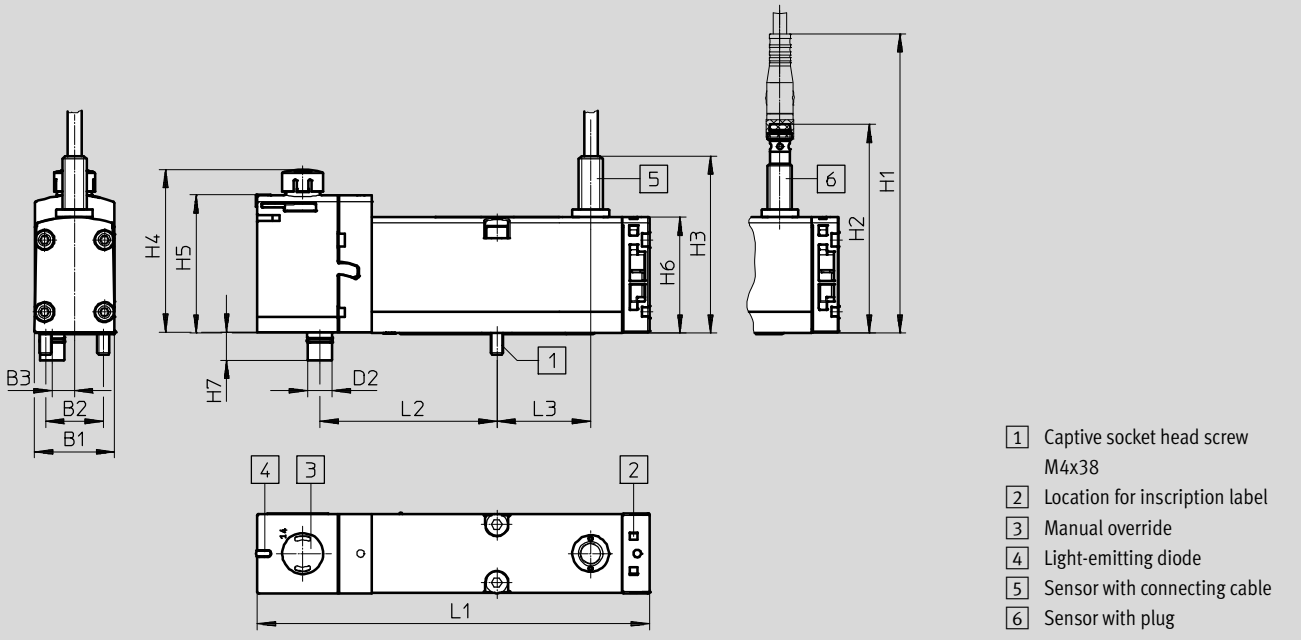

| Type | B1 | B2 | B3 | D2 | L1 | L2 | L3 |
|--------------------------------|------|----|-----|----|-------|----|------|
| VSVA-B-M52-MZD-A1-1T1L-... | 26.2 | 19 | 7.4 | 8 | 128.9 | 58 | 30.7 |
| VSVA-B-M52-MZD-A1-1T1L-APX-0.5 | | | | | | | |

| Type | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|--------------------------------|----|------|----|------|------|----|-----|
| VSVA-B-M52-MZD-A1-1T1L-... | 98 | 68.2 | 58 | 52.5 | 45.3 | 38 | 9.2 |
| VSVA-B-M52-MZD-A1-1T1L-APX-0.5 | | | | | | | |


Valve terminal VTSA/VTSA-F

Technical data – Solenoid valve with switching position sensing

Dimensions

Download CAD data → www.festo.com

Solenoid valve with sensor, with plug type C, width 26 mm


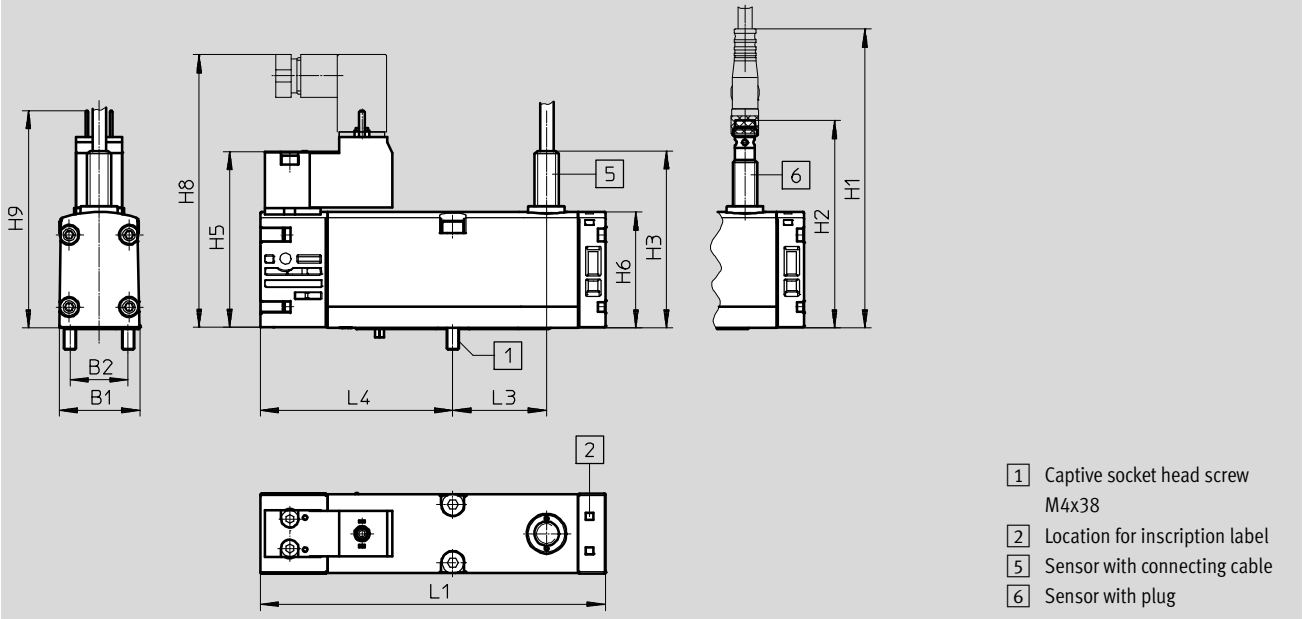




| Type | B1 | B2 | L1 | L3 | L4 |
|--------------------------|------|----|-------|------|------|
| VSVA-B-M52-MZ-A1-1C1-... | 26.2 | 19 | 113.1 | 30.7 | 63.1 |

| Type | H1 | H2 | H3 | H5 | H6 | H8 | H9 |
|--------------------------|----|------|----|------|----|------|------|
| VSVA-B-M52-MZ-A1-1C1-... | 98 | 68.2 | 58 | 57.8 | 38 | 89.6 | 71.2 |

Valve terminal VTSA/VTSA-F



Ordering data – Solenoid valve with switching position sensing



| Ordering data – VSVA solenoid valve, MO non-detenting/detenting (D) | | | | | |
|--|------|---|-------|----------|--------------------------------|
| | Code | Valve function | Width | Part No. | Type |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity sensor | | | | | |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-wire, 2.5 m | 26 mm | 560723 | VSVA-B-M52-MZD-A1-1T1L-APC |
| | - | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-wire, 2.5 m | 26 mm | 560742 | VSVA-B-M52-MZD-A1-1T1L-ANC |
|  | SS | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1 | 18 mm | 573201 | VSVA-B-M52-MZD-A2-1T1L-APX-0,5 |
| | | | 26 mm | 570850 | VSVA-B-M52-MZD-A1-1T1L-APX-0,5 |
| | SO | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1 | 18 mm | 573202 | VSVA-B-M52-MZD-A2-1T1L-APP |
| | | | 26 mm | 560724 | VSVA-B-M52-MZD-A1-1T1L-APP |
| | SQ | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1 | 18 mm | 573203 | VSVA-B-M52-MZD-A2-1T1L-ANP |
| | | | 26 mm | 560743 | VSVA-B-M52-MZD-A1-1T1L-ANP |

| Ordering data – VSVA solenoid valve with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR) | | | | | |
|--|------|---|-------|----------|---------------------------------|
| | Code | Valve function | Width | Part No. | Type |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity sensor | | | | | |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-wire, 2.5 m | 26 mm | 8033026 | VSVA-B-M52-MZTR-A1-1T1L-APC |
| | - | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-wire, 2.5 m | 26 mm | 8033030 | VSVA-B-M52-MZTR-A1-1T1L-ANC |
|  | SS | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1 | 18 mm | 8033459 | VSVA-B-M52-MZTR-A2-1T1L-APX-0.5 |
| | | | 26 mm | 8033034 | VSVA-B-M52-MZTR-A1-1T1L-APX-0.5 |
| | SO | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033460 | VSVA-B-M52-MZTR-A2-1T1L-APP |
| | | | 26 mm | 8033027 | VSVA-B-M52-MZTR-A1-1T1L-APP |
| | SQ | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033461 | VSVA-B-M52-MZTR-A2-1T1L-ANP |
| | | | 26 mm | 8033031 | VSVA-B-M52-MZTR-A1-1T1L-ANP |

Valve terminal VTSA/VTSA-F



Ordering data – Solenoid valve with switching position sensing

| Ordering data – VSVA solenoid valve with cover cap for MO, non-detenting (H) | | | | | |
|--|------|---|-------|----------------|--------------------------------|
| | Code | Valve function | Width | Part No. | Type |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity sensor | | | | | |
|  | – | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-wire, 2.5 m | 26 mm | 8033049 | VSVA-B-M52-MZH-A1-1T1L-APC |
| | – | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-wire, 2.5 m | 26 mm | 8033053 | VSVA-B-M52-MZH-A1-1T1L-ANC |
|  | SS | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1 | 18 mm | 8033477 | VSVA-B-M52-MZH-A2-1T1L-APX-0.5 |
| | | | 26 mm | 8033057 | VSVA-B-M52-MZH-A1-1T1L-APX-0.5 |
| | SO | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033478 | VSVA-B-M52-MZH-A2-1T1L-APP |
| | | | 26 mm | 8033050 | VSVA-B-M52-MZH-A1-1T1L-APP |
| | SQ | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033479 | VSVA-B-M52-MZH-A2-1T1L-ANP |
| | | | 26 mm | 8033054 | VSVA-B-M52-MZH-A1-1T1L-ANP |

| Ordering data – VSVA solenoid valve with cover cap for MO, covered | | | | | |
|--|------|---|-------|----------------|-------------------------------|
| | Code | Valve function | Width | Part No. | Type |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity sensor | | | | | |
|  | – | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-wire, 2.5 m | 26 mm | 8033072 | VSVA-B-M52-MZ-A1-1T1L-APC |
| | – | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-wire, 2.5 m | 26 mm | 8033076 | VSVA-B-M52-MZ-A1-1T1L-ANC |
|  | SS | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1 | 18 mm | 8033495 | VSVA-B-M52-MZ-A2-1T1L-APX-0.5 |
| | | | 26 mm | 8033080 | VSVA-B-M52-MZ-A1-1T1L-APX-0.5 |
| | SO | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033496 | VSVA-B-M52-MZ-A2-1T1L-APP |
| | | | 26 mm | 8033073 | VSVA-B-M52-MZ-A1-1T1L-APP |
| | SQ | 5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1 | 18 mm | 8033497 | VSVA-B-M52-MZ-A2-1T1L-ANP |
| | | | 26 mm | 8033077 | VSVA-B-M52-MZ-A1-1T1L-ANP |

Valve terminal VTSA/VTSA-F

Ordering data – Solenoid valve with switching position sensing

| Ordering data | | | | | |
|---|------|--|-------|----------|--------------------------|
| | Code | Valve function | Width | Part No. | Type |
| Solenoid valves, 24 V DC, with pneumatic interface to ISO 15218 for individual sub-base | | | | | |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with switching position sensing via inductive sensor with PNP output and cable, 3-wire | 26 mm | 560725 | VSVA-B-M52-MZ-A1-1C1-APC |
| | - | 5/2-way valve, single solenoid, mechanical spring return, with switching position sensing via inductive sensor with NPN output and cable, 3-wire | 26 mm | 560744 | VSVA-B-M52-MZ-A1-1C1-ANC |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with switching position sensing via inductive sensor with PNP output and 3-pin sensor push-in connector M8x1 | 26 mm | 560726 | VSVA-B-M52-MZ-A1-1C1-APP |
| | - | 5/2-way valve, single solenoid, mechanical spring return, with switching position sensing via inductive sensor with NPN output and 3-pin sensor push-in connector M8x1 | 26 mm | 560745 | VSVA-B-M52-MZ-A1-1C1-ANP |





-  - Note

- The sensors contained in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Return the module to Festo for repair in the event of a fault.
- Valves with switching position sensing from the series VSVA-B-M52-... can only be ordered individually. If these are used on a valve terminal, appropriate vacant positions must be provided for them. Exceptions are the two valves with ident. code SO and SQ.

Valve terminal VTSA/VTSA-F





Accessories – Solenoid valve with switching position sensing

FESTO

| Ordering data | | | | | | |
|--|------|--|------|-------|-----------------------------------|----------------------------|
| | Code | Description | | | Part No. | Type |
| Individual sub-base, port pattern to ISO 15407-2, electrical connection via plug connector M12 | | | | | | |
|  | - | Threaded connection, internal pilot air supply, lateral connections | G1/8 | 18 mm | 541070 | VABS-S4-2S-G18-B-R3 |
| | | | G1/4 | 26 mm | 541069 | VABS-S4-1S-G14-B-R3 |
| | - | Threaded connection, external pilot air supply, lateral connections | G1/8 | 18 mm | 541064 | VABS-S4-2S-G18-R3 |
| | | | G1/4 | 26 mm | 541063 | VABS-S4-1S-G14-R3 |
| Individual sub-base, port pattern to ISO 15407-2, electrical connection via cable terminals | | | | | | |
|  | - | Threaded connection, internal pilot air supply, lateral connections | G1/8 | 18 mm | 541067 | VABS-S4-2S-G18-B-K2 |
| | | | G1/4 | 26 mm | 541065 | VABS-S4-1S-G14-B-K2 |
| | - | Threaded connection, external pilot air supply, lateral connections | G1/8 | 18 mm | 539723 | VABS-S4-2S-G18-K2 |
| | | | G1/4 | 26 mm | 539725 | VABS-S4-1S-G14-K2 |
| Plug socket for electrical connection of individual valves, type C | | | | | | |
|  | - | <ul style="list-style-type: none"> • Angled socket, type C, 3-pin • Straight plug, PG7 • 230 V AC | | | 151687 | MSSD-EB |
| | | <ul style="list-style-type: none"> • Angled socket, type C, 3-pin • Straight plug, M12x1 | | | 539712 | MSSD-EB-M12 |
| Illuminating seal for plug pattern to EN 175301-803, type C | | | | | Technical data → Internet: meb-ld | |
|  | - | For plug socket MSSD, 12 ... 24 V DC | | | 151717 | MEB-LD-12-24DC |





Valve terminal VTSA/VTSA-F


Accessories – Solenoid valve with switching position sensing

| Ordering data | | | | | |
|--|---|--|--|------------------------------------|---------------------------------------|
| | Code | Description | Part No. | Type | |
| Connecting cable for electrical connection of individual valves, type C | | | | | |
|  | GG | <ul style="list-style-type: none"> Angled socket, type C, 3-pin, with LED Open end, 3-wire | 2.5 m | 151688 KMEB-1-24-2,5-LED | |
| | GH | <ul style="list-style-type: none"> 24 V DC, PVC | 5 m | 151689 KMEB-1-24-5-LED | |
| | GJ | | 10 m | 193457 KMEB-1-24-10-LED | |
| Connecting cable for electrical connection of sensors for switching position sensing | | | | | |
|  | GM | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Open end, 3-wire | 2.5 m | 541333 NEBU-M8G3-K-2,5-LE3 | |
| | GN | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Open end, 3-wire | 5 m | 541334 NEBU-M8G3-K-5-LE3 | |
|  | GO | <ul style="list-style-type: none"> Angled socket, M8x1, 3-pin Open end, 3-wire | 2.5 m | 541338 NEBU-M8W3-K-2,5-LE3 | |
| | GP | <ul style="list-style-type: none"> Angled socket, M8x1, 3-pin Open end, 3-wire | 5 m | 541341 NEBU-M8W3-K-5-LE3 | |
| | – | <ul style="list-style-type: none"> Angled socket, rotatable, M8x1, 3-pin Open end, 3-wire | 2.5 m | 8001660 NEBU-M8R3-K-2,5-LE3 | |
| | – | <ul style="list-style-type: none"> Angled socket, rotatable, M8x1, 3-pin Open end, 3-wire | 5 m | 8001661 NEBU-M8R3-K-5-LE3 | |
| |  | GQ | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Straight plug, M8x1, 4-pin | 2.5 m | 554037 NEBU-M8G3-K-2,5-M8G4 |
| | | – | Modular system for connecting cables | – | – NEBU-... → Internet: nebu |
| Pneumatic connection accessories | | | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms:</p> <p>Internet → connection technology, silencer, blanking plug</p> | | | | | |

Valve terminal VTSA/VTSA-F

Technical data – Control block with safety function

-  - Flow rate
on valve terminal:
830 l/min
-  - Solenoid valve width
26 mm
-  - Voltage
24 V DC
-  - Operating pressure
3 ... 10 bar

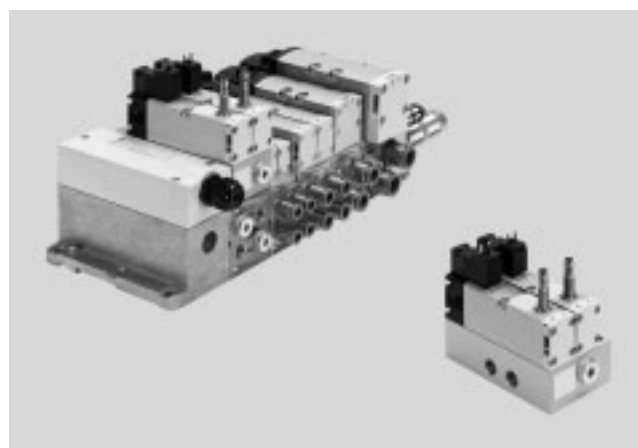

Description

The control block is designed for two-channel actuation of pneumatic drive components such as double-acting linear cylinders, for example, and can be used to realise the following protective measures:

- Protection against unexpected start-up (EN 1037)
- Reversing hazardous movements, provided the reversing motion will not result in further hazards


The control block has attributes that enable Performance Level e to be achieved for the safety measures. The control block has been developed and manufactured in accordance with the basic and proven safety principles of EN ISO 13849-1 and EN ISO 13849-2.

The requirements of EN ISO 13849-1 and EN ISO 13849-2 (e.g. CCF, DC) must be taken into consideration for implementation and operation of the component and for use in higher categories (2 to 4). When using this product in machines or systems subject to specific C standards, the requirements specified in these standards must be observed.

The control block with safety function is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode). The control block with safety function is suitable for use as a press safety valve to EN 962.


More information and technical data
➔ Internet: user documentation


Version for valve terminal VTSA/VTSA-F



The valves with integrated piston position sensing on manifold sub-base for valve terminal VTSA/VTSA-F need to be supplied with electrical power regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

The electrical connection for the solenoid valves is established separately via a standardised square plug to EN 175301-803, type C. The piston position sensing feature of the inductive PNP or NPN proximity sensor is realised using a push-in connector in the size M8x1 to EN 61076-2-104.

 - Note
The appropriate manifold sub-base VABV-S4- ..., which is required for integration into the valve terminal, is not part of the control block. It is automatically allocated by the configurator on selection of the control block.

 - Note
The control block with safety function (VOFA) is also available as a decentralised individual connection variant with electrical and pneumatic individual connection. For information see:
➔ Internet: vofa

Valve terminal VTSA/VTSA-F

Data sheet – Control block with safety function

Pneumatic/electrical interlinking

Function

The safety function is achieved through two-channel pneumatic linking of two 5/2-way single solenoid valves within the control block: port (4) is only pressurised if both solenoid valves are switched to switching position (14). Port (2) is always pressurised if at least one of the two solenoid valves is

in normal position. The valve is reset via a mechanical spring.

The switching operation of the solenoid valves can be monitored by sensing via the proximity sensors at the solenoid valves (switching position sensing). This is done by means of a logic


operation of the control signal and the signal change of the proximity sensor to check whether the piston spools of the solenoid valves are reaching or leaving the normal position (expectations).

The piston spools of the solenoid valves are designed so that pneumatic

short circuits between ports (2) and (4) are ruled out (freedom from overlap).

The two solenoid valves must be actuated via two separate ducts to achieve the desired category 4 (Performance Level e, to EN ISO 13849-1).

Circuit symbol¹⁾

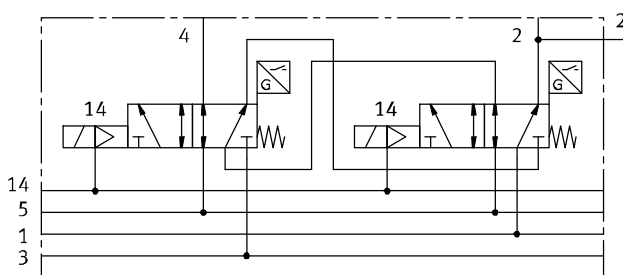

For the control block with safety function VOFA-B26-T52-... for the valve terminal, there is two-channel pneumatic interlinking of two 5/2-way solenoid

valves, width 26 mm, with the intermediate plate as vertical stacking (output 2 is switched in parallel, output 4 is switched in series).

1) The circuit symbol represents a valve with a proximity sensor with switching output signal with an N/O contact. In accordance with ISO 1219-1, this symbol applies to both N/O contacts and N/C contacts. The switching element function of the sensors used here is designed as an N/C contact.

Safety characteristics

| | |
|---|---|
| Conforms to standard | EN 13849-1 |
| Safety function | Protection against manipulation, prevention of unexpected start-up Reversing a movement |
| Performance Level (PL) | Protection against manipulation, prevention of unexpected start-up (up to category 4, Performance Level e) Reversing a movement/to category 4, Performance Level e |
| Note on forced switch on/off | Min. 1/week |
| Certificate issuing authority | IFA 1001179 |
| CE marking (see declaration of conformity) | To EU EMC Directive ¹⁾ To EC Machinery Directive |
| Max. positive test pulse with 0 signal [μs] | 1000 |
| Max. negative test pulse with 1 signal [μs] | 800 |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation. If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Valve terminal VTSA/VTSA-F

Technical data – Control block with safety function

| General technical data | |
|------------------------------------|---|
| Design | Piston spool valve |
| Standard nominal flow rate [l/min] | 830 |
| Reset method | Mechanical spring |
| Sealing principle | Soft |
| Exhaust function | With flow control |
| Actuation type | Electric |
| Non-overlapping | Yes |
| Type of control | Piloted |
| Direction of flow | Non-reversible |
| Exhaust function | With flow control |
| Suitability for vacuum | – |
| Nominal size [mm] | 9 |
| Pilot air supply | Via valve terminal |
| Type of mounting | Via through-hole, on manifold sub-base |
| Mounting position | Any |
| Manual override | – |
| Valve switching status display | Via accessories |
| Pneumatic connections | |
| Supply port 1 | Via the manifold sub-base of the valve terminal |
| Exhaust port 3/5 | |
| Working ports 2/4 | |
| Pilot air supply 14 | |
| Pressure gauge | G $\frac{1}{4}$ |

| Operating and environmental conditions | |
|--|--|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Pilot medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure [bar] | 0 ... 10 |
| Operating pressure for valve terminal with internal pilot air supply [bar] | 3 ... 10 |
| Pilot pressure [bar] | 3 ... 10 |
| Noise level LpA [dB(A)] | 85 |
| Ambient temperature [°C] | –5 ... +50 |
| Temperature of medium [°C] | –5 ... +50 |
| CE marking (see declaration of conformity) | To EU EMC Directive ¹⁾ To EC Machinery Directive |


1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Valve terminal VTSA/VTSA-F

Technical data – Control block with safety function

| Electrical data – Control block | | | |
|--|--|---------|----|
| Electrical connection | Plug to EN 175301-803, type C, without protective conductor | | |
| Nominal operating voltage | [V DC] | 24 | |
| Permissible voltage fluctuations | [%] | -15/+10 | |
| Surge resistance | [kV] | 2.5 | |
| Degree of contamination | 3 | | |
| Power consumption | [W] | 1.8 | |
| Max. magnetic disruption field | [mT] | 60 | |
| Switching position sensing | Normal position via sensor | | |
| Duty cycle ED | [%] | 100 | |
| Protection class to EN 60529 | IP65, NEMA 4 (for all types of signal transmission in assembled state) | | |
| Protection against direct and indirect contact | PELV Protected to EN 60950/IEC 950 | | |
| Valve switching time | On | [ms] | 22 |
| | Off | [ms] | 59 |
| Valve sensor switching time ¹⁾ | On | [ms] | 60 |
| | Off | [ms] | 11 |

- 1) Valve sensor switching time off: period of time from coil being energised to sensor being switched off when using a PNP sensor.
Valve sensor switching time on: period of time from coil being de-energised to 0-L edge at the sensor when using a PNP sensor.

 Note
With a duty cycle of 100%, the control block must be de-energised once per week.

| Electrical data – Sensor (to EN-60947-5-2) | | | |
|---|--------------------------------|-----------|--|
| Electrical connection | Cable, 3-wire | | |
| | Plug M8x1, 3-pin | | |
| Cable length | [m] | 2.5 | |
| Switching output | PNP or NPN | | |
| Switching element function | N/C contact | | |
| Switching status display | Yellow LED | | |
| Operating voltage range | [V DC] | 10 ... 30 | |
| Residual ripple | [%] | ±10 | |
| Sensor idle current | [mA] | Max. 10 | |
| Max. output current | [mA] | 200 | |
| Voltage drop | [V] | Max. 2 | |
| Max. switching frequency | [Hz] | 5,000 | |
| Protection against short circuit | Pulsed | | |
| Protection against polarity reversal for sensor | For all electrical connections | | |
| Measuring principle | Inductive | | |

| Materials | |
|----------------------------|----------------------------|
| Sub-base/manifold sub-base | Wrought aluminium alloy |
| Valve | Die-cast aluminium, PA |
| Seals | FPM, NBR, HNBR |
| Screws | Galvanised steel |
| Sensor housing | High-alloy stainless steel |
| Sensor cable sheath | PUR |
| Note on materials | RoHS-compliant |


Valve terminal VTSA/VTSA-F

Technical data – Control block with safety function

Dimensions

Download CAD data → www.festo.com

Version for valve terminal VTSA/VTSA-F

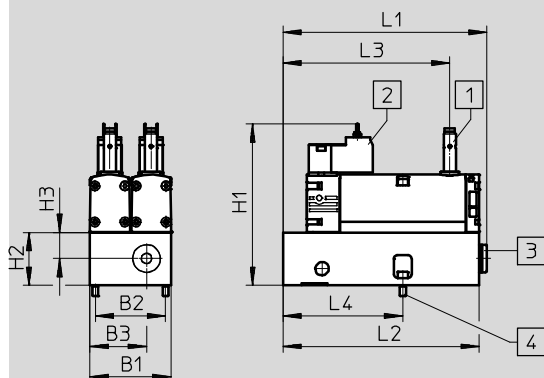

1 Proximity sensor PNP or NPN, size M8x1, plug connection to EN 61076-2-104


2 Electrical connection to EN 175301-803, type C

3 Pneumatic connection G $\frac{1}{4}$ sealed with blanking plug

4 2x screw with internal hex (2.5 A/F), M4x12 (included in the scope of delivery)

| Type | B1 | B2 | B3 | H1 | H2 | H3 | L1 | L2 | L3 | L4 |
|------------------------|----|----|----|-------|------|----|-------|-------|-------|------|
| VOFA-B26-T52-M-1C1-APP | 53 | 46 | 37 | 105.8 | 34.6 | 17 | 133.7 | 128.5 | 109.2 | 78.5 |
| VOFA-B26-T52-M-1C1-ANP | | | | | | | | | | |

Ordering data

| Valve function | Code | Switching output | Width [mm] | Weight [g] | Part No. | Type |
|---|------------------|------------------|------------|------------|-----------------|-------------------------------|
| Control block, version for valve terminal VTSA/VTSA-F | | | | | | |
|  2x 5/2-way valve, single solenoid, mechanical spring return, with switching position sensing via inductive sensor and 3-pin sensor push-in connector M8, mounted on intermediate plate for pneumatic interlinking | SP ²⁾ | PNP | 53 | 1112 | - ¹⁾ | VOFA-B26-T52-M-1C1-APP |
| | SN ²⁾ | NPN | 53 | 1112 | - ¹⁾ | VOFA-B26-T52-M-1C1-ANP |

1) The control block with safety function can only be ordered via the valve terminal configurator and therefore does not have a separate part number. The appropriate and necessary manifold sub-base for valve terminal VTSA/VTSA-F is automatically allocated to the control block by the configurator.

2) Code letter within the order code for a valve terminal configuration.








-  - Note

The sensors contained in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or

damage to the valve. Please contact Festo in the event of a malfunction.

Valve terminal VTSA/VTSA-F


Accessories – Control block with safety function





| Ordering data | | | | |
|--|------|--|----------|-----------------------------------|
| | Code | Description | Part No. | Type |
| Plug socket for electrical connection of individual valves, type C | | | | |
|  | – | <ul style="list-style-type: none"> Angled socket, type C, 3-pin Straight plug, PG7 230 V AC | 151687 | MSSD-EB |
| | – | <ul style="list-style-type: none"> Angled socket, type C, 3-pin Straight plug, M12x1 | 539712 | MSSD-EB-M12 |
| Illuminating seal for plug pattern to EN 175301-803, type C Technical data → Internet: meb-ld | | | | |
|  | – | For plug socket MSSD, 12 ... 24 V DC | 151717 | MEB-LD-12-24DC |
| Connecting cable for electrical connection of individual valves, type C | | | | |
|  | GG | <ul style="list-style-type: none"> Angled socket, type C, 3-pin, with LED Open end, 3-wire | 2.5 m | 151688 KMEB-1-24-2,5-LED |
| | GH | <ul style="list-style-type: none"> 24 V DC, PVC | 5 m | 151689 KMEB-1-24-5-LED |
| | GJ | | 10 m | 193457 KMEB-1-24-10-LED |
| Connecting cable for electrical connection of sensors for switching position sensing | | | | |
|  | GM | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Open end, 3-wire | 2.5 m | 541333 NEBU-M8G3-K-2,5-LE3 |
| | GN | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Open end, 3-wire | 5 m | 541334 NEBU-M8G3-K-5-LE3 |
|  | – | <ul style="list-style-type: none"> Angled socket, rotatable, M8x1, 3-pin Open end, 3-wire | 2.5 m | 8001660 NEBU-M8R3-K-2,5-LE3 |
| | – | <ul style="list-style-type: none"> Angled socket, rotatable, M8x1, 3-pin Open end, 3-wire | 5 m | 8001661 NEBU-M8R3-K-5-LE3 |
|  | GQ | <ul style="list-style-type: none"> Straight socket, M8x1, 3-pin Straight plug, M8x1, 4-pin | 2.5 m | 554037 NEBU-M8G3-K-2,5-M8G4 |
|  | – | Modular system for connecting cables | – | – NEBU-... → Internet: nebu |
| Pneumatic connection accessories | | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms:</p> <p>Internet → connection technology, silencer, blanking plug</p> | | | | |


Valve terminal VTSA/VTSA-F

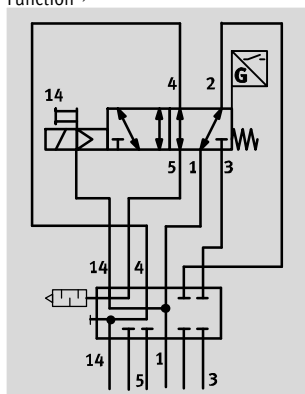Technical data – Pilot air switching valve, width 18 mm, 26 mm

Function¹⁾



-  - Flow rate
150 l/min (18 mm)
450 l/min (26 mm)
-  - Valve width
18 mm
26 mm
-  - Voltage
24 V DC
-  - Operating pressure
-0.9 ... 10 bar

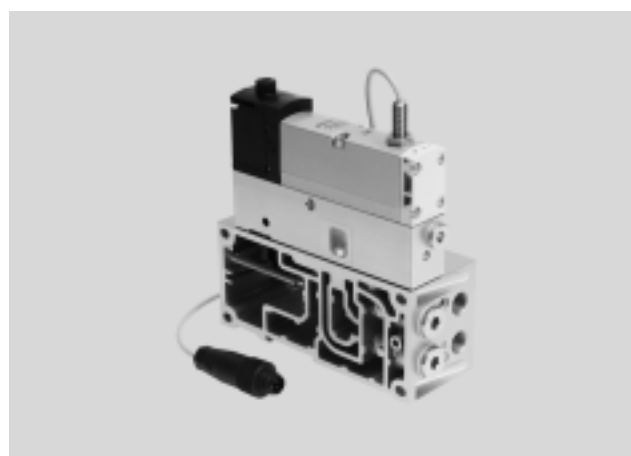

Description

The pilot air switching valve is essentially a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S. It enables verifiable switching on and off (sensor function) of the pilot air supply from duct 1 to 14 for the entire pressure zone or

valve terminal. This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control system.

This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1. This valve is designed for installation in machines and automation systems and must

only be used in industrial applications (high-demand mode). More information and technical data
➔ Internet: user documentation

Alternative switching position sensing with pressure switch

As an alternative to the sensor function in the solenoid valve, a pressure switch can be mounted (instead of the

blanking plug) in the intermediate plate VABF-S4-...-S. This pressure switch enables verifiable switching on

and off (sensor function) of the pilot air supply. An ISO solenoid valve without a sensor can therefore be


mounted on the intermediate plate for the same function.
➔ Internet: spba

-  - Note

The pilot air switching valve can only be operated on the valve terminal VTSA/VTSA-F in combination with a right-hand end plate for external

pilot air type VABE-S6-1RZ-... . Port 14 on the right-hand end plate must be sealed for this.

Vertical stacking variant for valve terminal VTSA/VTSA-F, width 18 mm, 26 mm



The valves with integrated piston position sensing in plug-in design for valve terminal VTSA/VTSA-F can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

This module is supplied pre-assembled together with the valve terminal VTSA/VTSA-F. No other assembly steps are required before installation. The piston position sensing feature is realised by means of an inductive PNP proximity sensor with cable and

push-in connector in the size M12x1 to EN 61076-2-104.

Alternatively, combinations with the pressure switch in the intermediate plate and ISO solenoid valves are possible.

-  - Note

All solenoid valves VSVA to ISO 15407-1 can be used.


➔ Internet: vsva

1) The circuit symbol represents a valve with a proximity sensor with switching output signal with an N/O contact. In accordance with ISO 1219-1, this symbol applies to both N/O contacts and N/C contacts. The switching element function of the sensors used here is designed as an N/C contact.

Valve terminal VTSA/VTSA-F

Data sheet – Pilot air switching valve, width 18 mm, 26 mm

Function – Pneumatic/electrical interlinking



The function for switching off the pilot air is essentially achieved by combining the intermediate plate type VABF-S4-...-S with the 5/2-way single solenoid valve type VSVA-B-M52-MZD-...-1T1L-APX-0,5. The valve terminal is not supplied with any pilot air via the right-hand end plate type VABE-S6-1 (ident. code XS, external pilot air). Port 14 on the end plate is sealed.

The pilot air for the valve is branched from duct (1) in the intermediate plate

and redirected to the pilot air duct (14) of the valve terminal when the valve is in the switching position. Ports (2) and (4) of the manifold sub-base are sealed with blanking plugs. The switching operation of the solenoid valve can be monitored by sensing via the proximity sensor in the solenoid valve (or pressure switch in the intermediate plate VABF...).

This is done by means of a logic operation of the control signal and the signal change of the proximity sensor

to check whether the piston spools of the solenoid valves are reaching or leaving the normal position (expectations).

The piston spool of the solenoid valve is designed so that pneumatic short circuits between ports (2) and (4) are ruled out (freedom from overlap).

Alternatively, combinations with the pressure switch in the intermediate plate and ISO solenoid valves are possible.



Note

A valve from the VTSA/VTSA-F modular system can be provided or configured to the right of the valve

with piston position sensing on the intermediate plate of the pilot air switching valve.

Pilot air switching valve with integrated piston position sensing

The pilot air switching valve can be ordered as a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S.

Alternative switching position sensing with pressure switch

As an alternative to the pilot air switching valve with integrated piston position sensing, a combination of ISO solenoid valve and pressure switch in the intermediate plate is possible.

Various 5/2-way solenoid valves are available in combination with a pressure switch SPBA-... for this purpose.

Safety characteristics

| | |
|---|---|
| Conforms to standard | EN 13849-1/2 |
| Note on forced switch on/off | Min. 1/week |
| CE marking (see declaration of conformity) | In accordance with EU EMC Directive ¹⁾ |
| Shock resistance | Shock test with severity level 2, to EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2, to EN 60068-2-6 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Safety characteristics

| Valve function 5/2-way, single solenoid | Test pulses | |
|---|---|---|
| | Max. positive test pulse with 0 signal [µs] | Max. negative test pulse with 1 signal [µs] |
| VSVA-B-M52-MZD- ... | 1200 | 1100 |
| VSVA-B-M52-MZD-A2 ... (without sensor) | 1500 | 800 |
| VSVA-B-M52-MZ- ... | 1000 | 800 |

Valve terminal VTSA/VTSA-F

Technical data – Pilot air switching valve, width 18 mm, 26 mm

| General technical data | | |
|---|--|--|
| | Intermediate plate type VABF-S4-2-S and solenoid valve type VSVA-B-M52-MZD-A2-1T1L-APX-0,5 mounted on valve terminal VTSA/VTSA-F | Intermediate plate type VABF-S4-1-S and solenoid valve type VSVA-B-M52-MZD-A1-1T1L-APX-0,5 mounted on valve terminal VTSA/VTSA-F |
| Width | 18 mm | 26 mm |
| Design | Piston spool valve | |
| Sealing principle | Soft | |
| Actuation type | Electrical | |
| Type of control | Piloted | |
| Type of mounting: Solenoid valve on intermediate plate Intermediate plate on manifold sub-base | M3 M3x12 (captive) | M4 M4x12 (captive) |
| Mounting position | Any | |
| Pneumatic connections | | |
| Supply port | 1 | Via the manifold sub-base of the valve terminal |
| Exhaust | 3/5 | Via the manifold sub-base of the valve terminal |
| Working ports | 2/4 | Sealed with blanking plug type B-1/4 |
| Pilot air supply | 14 | Via the manifold sub-base of the valve terminal |
| Pressure gauge/pressure switch | G1/8 | |


| Switching times [ms] | | | |
|---|-----|--------|--------|
| Width | | 18 mm | 26 mm |
| Valve type | | 5/2 | 5/2 |
| Identifier | | MZD-A2 | MZD-A1 |
| Valve switching time | On | 12 | 20 |
| | Off | 38 | 41 |
| Valve sensor switching time ¹⁾ | On | 32 | 60 |
| | Off | 9 | 11 |

1) Valve sensor switching time off: period of time from coil being energised to sensor being switched off when using a PNP sensor.
Valve sensor switching time on: period of time from coil being de-energised to 0-L edge at the sensor when using a PNP sensor.

Protective circuit

Each VSVA solenoid coil is provided with a spark arresting protective circuit and protected against polarity reversal.

24 V DC version

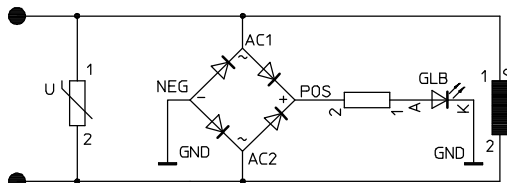


Valve terminal VTSA/VTSA-F

Technical data – Pilot air switching valve, width 18 mm, 26 mm

Peripherals overview

Pilot air switching valve with piston position sensing

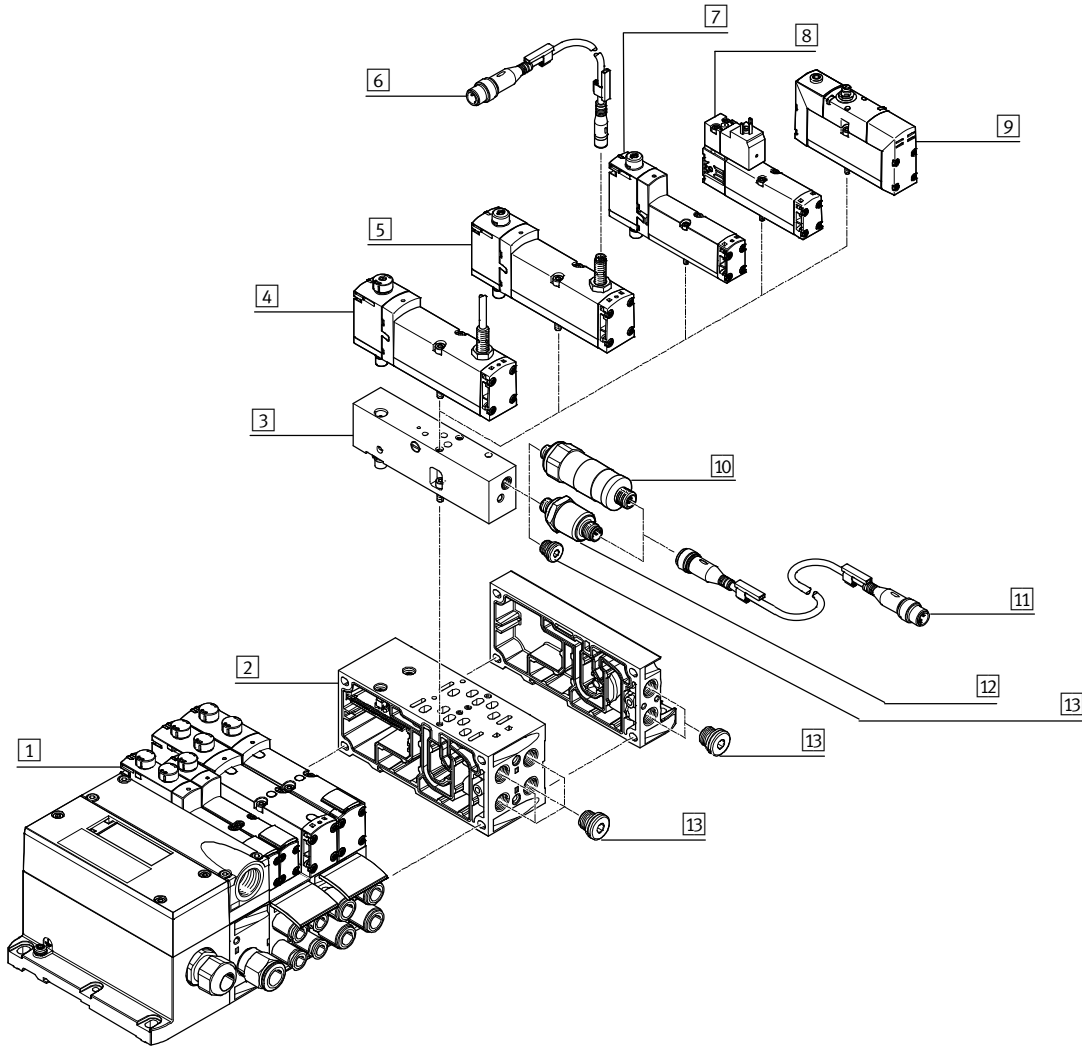

| Peripherals overview – Pilot air switching valve | | | |
|--|---------------------------------|--|------|
| | Brief description | → Page/Internet | |
| 1 | Valve terminal VTSA/VTSA-F | Valve terminal with multi-pin plug interface | vtsa |
| 2 | Manifold sub-base VABF-... | Width 18 mm or 26 mm | 125 |
| 3 | Intermediate plate VABF-S4-... | For pilot air switching valve | 157 |
| 4 | Solenoid valve VSVA-B-M52-... | Width 18 mm or 26 mm, with sensor and integrated cable 0.5 m | 157 |
| 5 | Solenoid valve VSVA-B-M52-... | Width 18 mm or 26 mm, with sensor for external connecting cable | 157 |
| 6 | Connecting cable NEBU-M8 ... | For connection to sensor | 158 |
| 7 | Solenoid valve VSVA-B-M52-... | Width 18 mm or 26 mm ¹⁾ | 157 |
| 8 | Solenoid valve VSVA-B-M52-... | Width 18 mm or 26 mm, with plug to EN 175301, type C ¹⁾ | 157 |
| 9 | Solenoid valve VSVA-B-M52-... | Width 18 mm or 26 mm, with round plug ¹⁾ | vsva |
| 10 | Pressure switch SPBA-... | Mechanically actuated | 158 |
| 11 | Connecting cable NEBU-M12G5-... | For connection to pressure switch | 158 |
| 12 | Pressure switch SPBA-... | Electrically actuated | 158 |
| 13 | Blanking plug | – | 208 |

1) The switching position sensing function is performed with pressure switches when using solenoid valves without integrated sensor. The pressure switch is screwed into the intermediate plate instead of the blanking plug.

Valve terminal VTSA/VTSA-F

Technical data – Pilot air switching valve, width 18 mm, 26 mm

| Electrical data – Pilot air switching valve | | |
|---|--------|--|
| Nominal operating voltage | [V DC] | 24 |
| Permissible voltage fluctuations | [%] | ±10 |
| Surge resistance | [kV] | 2.5 |
| Degree of contamination | | 3 |
| Power consumption | [W] | 1.6 (M52-MZD), 1.8 (M52-MZ) |
| Max. magnetic disruption field | [mT] | 60 |
| Switching position sensing | | Normal position via sensor |
| Duty cycle ED | [%] | 100 |
| Protection class | | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

| Electrical data – Sensor | | | | | |
|---------------------------------------|----------------------------------|------------------------------------|-------------------------------|-----|--|
| Sensor identifier | APP | ANP | APC | ANC | APX |
| Switching output | PNP | NPN | PNP | NPN | PNP |
| Sensor connection | Plug, M8x1, 3-pin | | With fixed cable and open end | | With fixed cable and plug M12x1, 4-pin |
| Cable length | [m] | 0.5 (with socket M8x1, plug M12x1) | 2.5 | | 0.5 |
| Switching element function | N/C contact | | | | |
| Switching status display | Yellow LED (on sensor) | | | | |
| Operating voltage range | [V DC] | 10 ... 30 | | | |
| Residual ripple | [%] | ±10 | | | |
| Rated operating voltage | [V DC] | 24 | | | |
| Max. idle current | [mA] | 10 | | | |
| Max. output current | [mA] | 200 | | | |
| Max. voltage drop | [V] | 2 | | | |
| Max. switching frequency | [Hz] | 5000 | | | |
| Protection against short circuit | Pulsed | | | | |
| Protection against incorrect polarity | For all electrical connections | | | | |
| Measuring principle | Inductive | | | | |
| Switching position sensing | Valve normal position via sensor | | | | |

Valve terminal VTSA/VTSA-F

FESTO

Technical data – Pilot air switching valve, width 18 mm, 26 mm

| Operating and environmental conditions | |
|--|--|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/ pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure [bar] | -0.9 ... 10 |
| Noise level LpA [dB(A)] | 85 |
| Ambient temperature [°C] | -5 ... +50 |
| Temperature of medium [°C] | -5 ... +50 |
| Note on materials | RoHS-compliant |
| Approval certificate | c UL us – Recognized (OL), only for valve function (M52-MZD) |
| | C-Tick (not part nos.: 539159, 539185) |
| | CSA (OL), only for valve function (M52-MZD) |

| Materials | |
|----------------------------|----------------------------|
| Sub-base/manifold sub-base | Die-cast aluminium |
| Valve | Die-cast aluminium, PA |
| Seals | FPM, NBR |
| Screws | Galvanised steel |
| Sensor housing | High-alloy stainless steel |
| Sensor cable sheath | TPE-U(PUR) |

| Product weight | | |
|--------------------------------|---------|-------|
| Width | 18 mm | 26 mm |
| 5/2-way solenoid valve type... | | |
| VSVA-B-M52-MZD-A1-1T1L-APC | – | 307 g |
| VSVA-B-M52-MZD-A1-1T1L-APP | – | 264 g |
| VSVA-B-M52-MZ-A1-1C1-APC | – | 332 g |
| VSVA-B-M52-MZ-A1-1C1-APP | – | 289 g |
| VSVA-B-M52-MZD-A1-1T1L-ANC | – | 307 g |
| VSVA-B-M52-MZD-A1-1T1L-ANP | – | 264 g |
| VSVA-B-M52-MZ-A1-1C1-ANC | – | 332 g |
| VSVA-B-M52-MZ-A1-1C1-ANP | – | 289 g |
| VSVA-B-M52-MZD-A1-1T1L-APX-0.5 | – | 281 g |
| VSVA-B-M52-MZD-A2-1T1L-APX-0.5 | 157 g | – |
| VSVA-B-M52-MZD-A2-1T1L-APP | 140 g | – |
| VSVA-B-M52-MZD-A2-1T1L-ANP | 140 g | – |
| VSVA-B-M52-MZD-A1-1T1L | – | 293 g |
| VSVA-B-M52-MZD-A2-1T1L | 163 g | – |
| Intermediate plate | | |
| VABF-S4-2-S | 203.5 g | – |
| VABF-S4-1-S | – | 295 g |








**New**

Solenoid valve with pre-assembled cover cap

FESTO

Valve terminal VTSA/VTSA-F

Ordering data – Pilot air switching valve, width 18 mm, 26 mm

| Ordering data | | | | | | |
|--|------|--|----------|-------|---------------|---------------------------------------|
| | Code | Valve function | Part No. | Type | | |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity sensor | | | | | | |
|  | SS | 5/2-way valve, single solenoid, mechanical spring return, with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1 | PNP | 18 mm | 573201 | VSVA-B-M52-MZD-A2-1T1L-APX-0,5 |
| | | | | 26 mm | 570850 | VSVA-B-M52-MZD-A1-1T1L-APX-0,5 |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with 2.5 m connecting cable | PNP | 26 mm | 560723 | VSVA-B-M52-MZD-A1-1T1L-APC |
| | | | | NPN | 26 mm | 560742 |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with 3-pin sensor push-in connector M8x1 | PNP | | 18 mm | 573202 |
| | | | | 26 mm | 560724 | VSVA-B-M52-MZD-A1-1T1L-APP |
| | | | NPN | 18 mm | 573203 | VSVA-B-M52-MZD-A2-1T1L-ANP |
| | | | | 26 mm | 560743 | VSVA-B-M52-MZD-A1-1T1L-ANP |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with plug to EN 175301, type C, with 2.5 m connecting cable | PNP | 26 mm | 560725 | VSVA-B-M52-MZ-A1-1C1-APC |
| | | | | NPN | 26 mm | 560745 |
|  | - | 5/2-way valve, single solenoid, mechanical spring return, with plug to EN 175301, type C, with 3-pin sensor push-in connector M8x1 | PNP | | 26 mm | 560726 |
| | | | | NPN | 26 mm | 560744 |
| 5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F | | | | | | |
|  | - | 5/2-way valve, single solenoid, mechanical spring return | | 26 mm | 539159 | VSVA-B-M52-MZD-A1-1T1L |
| | | | | 18 mm | 539185 | VSVA-B-M52-MZD-A2-1T1L |
| Intermediate plate for pilot air switching valve for valve terminal VTSA/VTSA-F | | | | | | |
|  | ZO | Intermediate plate, for switching the pilot air from duct 1 to 14 | | 18 mm | 573200 | VABF-S4-2-S |
| | | | | 26 mm | 570851 | VABF-S4-1-S |

-  - Note

Further solenoid valves with switching position sensing can be ordered as distinct types. These are preconfigured with the required MO

cover caps.
→ Solenoid valve with switching position sensing page 140









-  - Note

The sensors contained in the valves must not be replaced by the customer. Incorrect assembly can

result in malfunctions or damage to the valve. Please contact Festo in the event of a malfunction.







Valve terminal VTSA/VTSA-F

Ordering data – Pilot air switching valve, width 18 mm, 26 mm

| Ordering data | | | | |
|--|------|---|----------------|--|
| | Code | Description | Part No. | Type |
| Pressure switch for intermediate plate for pilot air switching valve | | | | |
|  | WL | Mechanical pressure switch for switchable pilot air supply (only in combination with intermediate plate ZO), with plug M12x1, 4-pin | 8000033 | SPBA-P2R-G18-W-M12-0,25X |
|  | WH | Electrical pressure switch for switchable pilot air supply, switching output 2xPNP (only in combination with intermediate plate ZO), with plug M12x1, 4-pin | 8000210 | SPBA-P2R-G18-2P-M12-0,25X |
| Connecting cable for pressure switch connection | | | | |
|  | GE | <ul style="list-style-type: none"> • Straight socket, M12x1, 5-pin • Straight plug, M12x1, 4-pin | 0.5 m | 8000208 NEBU-M12G5-K-0.5-M12G4 |
| Connecting cable for electrical connection of sensors for switching position sensing | | | | |
|  | – | <ul style="list-style-type: none"> • Straight socket, M8x1, 3-pin • Straight plug, M12x1, 3-pin | 0.5 m | 8000209 NEBU-M8G3-K-0.5-M12G3 |
|  | GM | <ul style="list-style-type: none"> • Straight socket, M8x1, 3-pin • Open end, 3-wire | 2.5 m | 541333 NEBU-M8G3-K-2,5-LE3 |
| | GN | <ul style="list-style-type: none"> • Straight socket, M8x1, 3-pin • Open end, 3-wire | 5 m | 541334 NEBU-M8G3-K-5-LE3 |
|  | GO | <ul style="list-style-type: none"> • Angled socket, M8x1, 3-pin • Open end, 3-wire | 2.5 m | 541338 NEBU-M8W3-K-2,5-LE3 |
| | GP | <ul style="list-style-type: none"> • Angled socket, M8x1, 3-pin • Open end, 3-wire | 5 m | 541341 NEBU-M8W3-K-5-LE3 |
| | – | <ul style="list-style-type: none"> • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-wire | 2.5 m | 8001660 NEBU-M8R3-K-2.5-LE3 |
| | – | <ul style="list-style-type: none"> • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-wire | 5 m | 8001661 NEBU-M8R3-K-5-LE3 |
|  | GQ | <ul style="list-style-type: none"> • Straight socket, M8x1, 3-pin • Straight plug, M8x1, 4-pin | 2.5 m | 554037 NEBU-M8G3-K-2,5-M8G4 |
|  | – | Modular system for connecting cables | – | – NEBU-... → Internet: nebu |

Valve terminal VTSA/VTSA-F

Ordering data – Pilot air switching valve, width 18 mm, 26 mm

| Ordering data | | | | | |
|---|------|---|-----------|----------------|--|
| | Code | Description | | Part No. | Type |
| Cover | | | | | |
|  | N | Cover cap for manual override, non-detenting | 10 pieces | 541010 | VAMC-S6-CH |
|  | V | Cover cap for manual override, covered | 10 pieces | 541011 | VAMC-S6-CS |
|  | A | Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-time assembly only) | 10 pieces | 4105147 | VAMC-B-S6-CTR  |
| Accessory for manual override, heavy duty | | | | | |
|  | – | Coded key (accessory) for actuating cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR) | 1 piece | 1662543 | AHB-MEB-B  |
| Pneumatic connection accessories | | | | | |
| A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms: Internet → connection technology, silencer, blanking plug | | | | | |


 **Note**

There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.


Valve terminal VTSA/VTSA-F





Technical data – Soft-start valve, width 43 mm


Function without sensor



with sensor



-  - Flow rate
Pressurisation: 3000 l/min
Exhausting: 3300 l/min
-  - Module width
43 mm
-  - Temperature range
-5 ... +50 °C
-  - Operating pressure
2 ... 12 bar

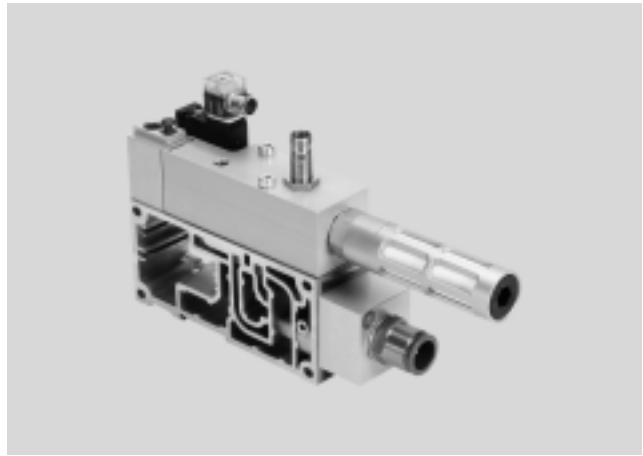

Description

Function

The purpose of the soft-start valve is to slowly and safely build up the supply pressure in duct 1 of the valve terminal or to quickly exhaust it. Switch-on takes place in two stages:

- First the working pressure provided for duct 1 gradually increases (the speed can be adjusted using a flow control screw).

- Once the working pressure in duct 1 reaches a previously set value, the soft-start valve switches the full operating pressure at duct 1 of the valve terminal. The switching point for full operating pressure is set to 4 bar at the factory, but can be changed using an adjusting screw.

The full operating pressure is applied to duct 14 (pilot air) at all times. This pressure causes the valves on the valve terminal to immediately move to the required switching position; no undefined status is possible. Duct 1 of the valve terminal is exhausted via the soft-start valve's exhaust port only in the normal

position, when the valve is not switched. The exhaust air can optionally be ducted with a QS fitting or using a silencer. A detenting manual override with self-reset via an electrical control signal is available for maintenance and service purposes.

Note

When using "Protection against unexpected start-up":
Protection against unexpected

activation of the manual override (MO) must be guaranteed in all operating modes.

Diagnostics

The piston position of the soft-start valve can be monitored by a sensor with integrated LED display. This sensor registers whether the valve has

switched and thus whether the valve terminal is being supplied with air. Pressure sensing via a pressure gauge (optional) is also possible.

The soft-start valve can alternatively be ordered with a sensor. Due to the calibration that is required, there is no provision for subsequent retrofit-

ting of a sensor. Connecting cables with integrated LED display are provided for displaying the signal status.

Pilot air supply

The valve terminal can either be supplied with internal pilot air via the soft-start valve or with internal or external pilot air via the various end

plate variants. The type of pilot air supply is determined by the seal of the soft-start valve.

The scope of delivery of the soft-start valve includes both the seal for internal pilot air supply (with hole) and

the seal for external pilot air supply (without hole).

Creation of pressure zones with a soft-start valve

The soft-start valve can be used for the pneumatic compressed air supply of the valve terminal or of a pressure zone. The soft-start valve may only be used as the single compressed air supply component on valve terminals

with a pressure zone or within a pressure zone. If a soft-start valve in combination with a right-hand end plate (code XP3) is chosen for a pressure zone, a supply plate with a blanking plug in

duct 1 (code W) is required in this pressure zone. When using a soft-start valve, a supply plate (with blanking plug in duct 1) is generally also required for this pressure zone for removal of the exhaust

air (duct 3/5). A supply plate is not required if the exhaust air (duct 3/5) in a pressure zone with soft-start valve can be removed via the right-hand end plate.

Valve terminal VTSA/VTSA-F

Data sheet – Soft-start valve, width 43 mm

Restrictions

| Compressed air supply | Exhaust air | Pilot air supply | Reverse operation |
|--|--|---|---|
| There must be no other elements supplying compressed air in the pressure zone in which the soft-start valve is being operated. | Exhaust air cannot be discharged via the soft-start valve. If it is being used in a pressure zone with duct 3/5 separated, an exhaust plate is required. | If internal pilot air supply (duct 14) via the soft-start valve is chosen, there must be no other pilot air supply within the valve terminal. | The soft-start valve is not approved for reverse operation. |



Note

Setting options as well as drawings with descriptions of the components for the soft-start valve can be found in the user documentation. The adjusting screws are freely accessible in the built-in state.

General technical data

| | |
|-------------------------|--|
| Design | Piston spool valve |
| Actuation type | Electric |
| Sealing principle | Soft |
| Type of mounting | On sub-base, ISO size 1 to ISO 5599-2 |
| Mounting position | Any |
| Valve function | Soft-start function |
| Manual override | Detenting, self-resetting via electrical control signal, normal position on top → page 164 |
| Reset method | Mechanical spring |
| Type of control | Piloted |
| Pilot air supply | Internal, external |
| Direction of flow | Non-reversible |
| Piston position sensing | Switching position via sensor |

Standard nominal flow rate [l/min]

| | |
|----------------|------|
| Pressurisation | 3000 |
| Exhausting | 3300 |

Operating and environmental conditions

| Type | VABF-S6-1-P5A4-...-1 | VABF-S6-1-P5A4-...-2A |
|--|---|-----------------------------|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] | |
| Notes about the operating/pilot medium | Lubricated operation possible possible (in which case lubricated operation will always be required) | |
| Operating pressure [bar] | 2 ... 12 | 2 ... 10 |
| Switchover pressure [bar] presetting | 4 | |
| Ambient temperature [°C] | -5 ... +50 | |
| Note on materials | Conforms to RoHS | |
| CE marking (see declaration of conformity) | - | To EU Low Voltage Directive |

Valve terminal VTSA/VTSA-F

FESTO

Technical data – Soft-start valve, width 43 mm

| Valve switching times [ms] | | |
|----------------------------|-----|----|
| Valve switching time | On | 17 |
| | Off | 50 |

| Electrical data – Soft-start valve | | |
|------------------------------------|--|---|
| Type | VABF-S6-1-P5A4-...-1 | VABF-S6-1-P5A4-...-2A |
| Electrical connection | Plug type C to EN 175301-803, square design | |
| Nominal operating voltage [V] | 24 DC | 110 AC |
| Operating voltage range [V] | 24 DC $\pm 10\%$ | 110 AC $\pm 10\%$ |
| Coil characteristics | 24 V DC: 2.5 W | 110/120 V AC: 50/60 Hz, 3.0 VA pull-in power 110/120 V AC: 50/60 Hz, 2.4 VA holding capacity |
| Protection class to EN 60529 | IP65, NEMA 4 (for all types of signal transmission in assembled state) | |

| Electrical data – Sensor | | |
|--|-----------------------------------|------------------|
| Type | SIEN-M12B-PS-S-L | SIEN-M12B-NS-S-L |
| Electrical connection | Plug M12x1 to EN 60947-5-2, 4-pin | |
| Switching output | PNP | NPN |
| Switching element function | N/O contact | |
| Switching status display | Yellow LED | |
| Operating voltage range [V DC] | 10 ... 30 | |
| Residual ripple [%] | ± 10 | |
| Rated operating voltage [V DC] | 24 | |
| Sensor idle current [mA] | 10 | |
| Max. output current [mA] | 200 | |
| Max. voltage drop [V] | 2 | |
| Max. switching frequency [Hz] | 3,000 | |
| Protection against short circuit | Pulsed | |
| Protection against incorrect polarity for sensor | For all electrical connections | |
| Measuring principle | Inductive | |
| Piston position sensing | Switching position via sensor | |

| Materials – Soft-start valve | |
|------------------------------|-------------------------|
| Housing | Wrought aluminium alloy |
| Seals | NBR, HNBR |
| Screws | Galvanised steel |

Valve terminal VTSA/VTSA-F

Technical data – Soft-start valve, width 43 mm

Example 1: Pressure zone with soft-start valve and pilot air supply

Internal, external pilot air supply

Requirements


- Compressed air supply via soft-start valve
- Right-hand end plate¹⁾: blanking plug in duct 1

For internal pilot air supply:

- Seal (soft-start valve - manifold sub-base) with pilot air supply hole "open" and
- Right-hand end plate: blanking plug in duct 14

For external pilot air supply:

- Seal (soft-start valve - manifold sub-base) with pilot air supply hole "closed" and
- Pilot air supply via duct 14 in the right-hand end plate

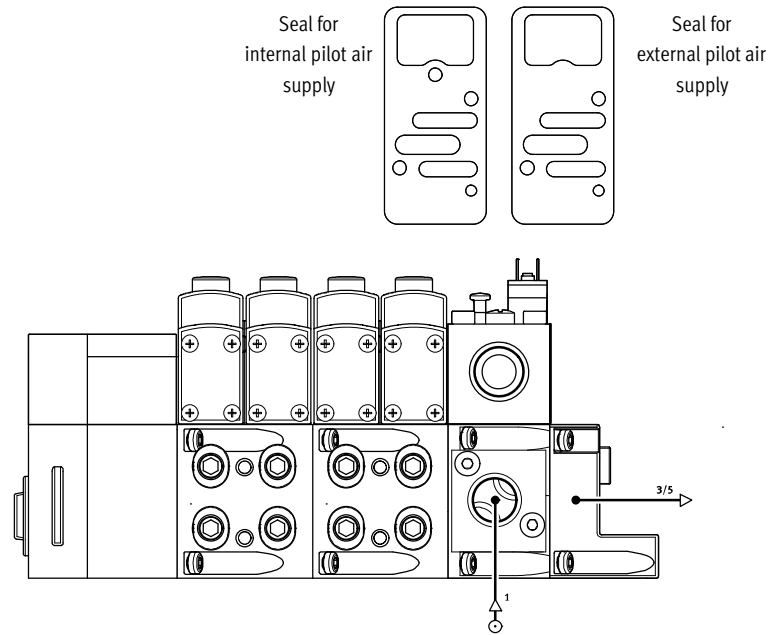

1) With this configuration, a right-hand end plate with pilot air selector is not possible, as it does not allow the discharge of exhaust air

Example 2: Pressure zone with soft-start valve, supply plate and pilot air supply

Internal, external pilot air supply

Requirements


- Compressed air supply via soft-start valve
- Supply plate: blanking plug in duct 1
- Right-hand end plate: blanking plug in duct 1, 3, 5 or
- Right-hand end plate with pilot air selector

For internal pilot air supply:

- Seal (soft-start valve - manifold sub-base) with pilot air supply hole "open" and
- Right-hand end plate: blanking plug in duct 14 or
- End plate with coding (position 2, internal pilot air supply)

For external pilot air supply:

- Seal (soft-start valve - manifold sub-base) with pilot air supply hole "closed" and
- Pilot air supply via duct 14 in the right-hand end plate or
- End plate with coding (position 1, external pilot air supply)

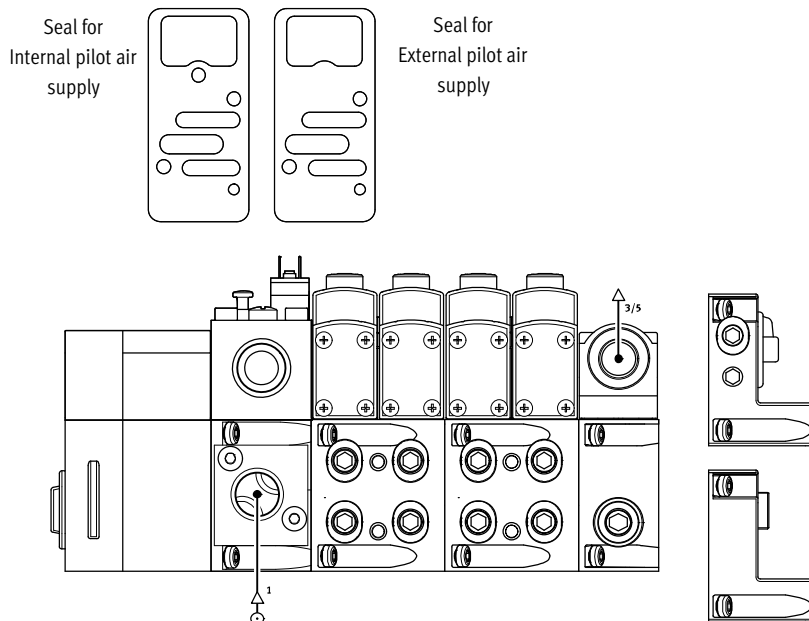


Valve terminal VTSA/VTSA-F

Technical data – Soft-start valve, width 43 mm

Dimensions

Download CAD data → www.festo.com

Soft-start valve


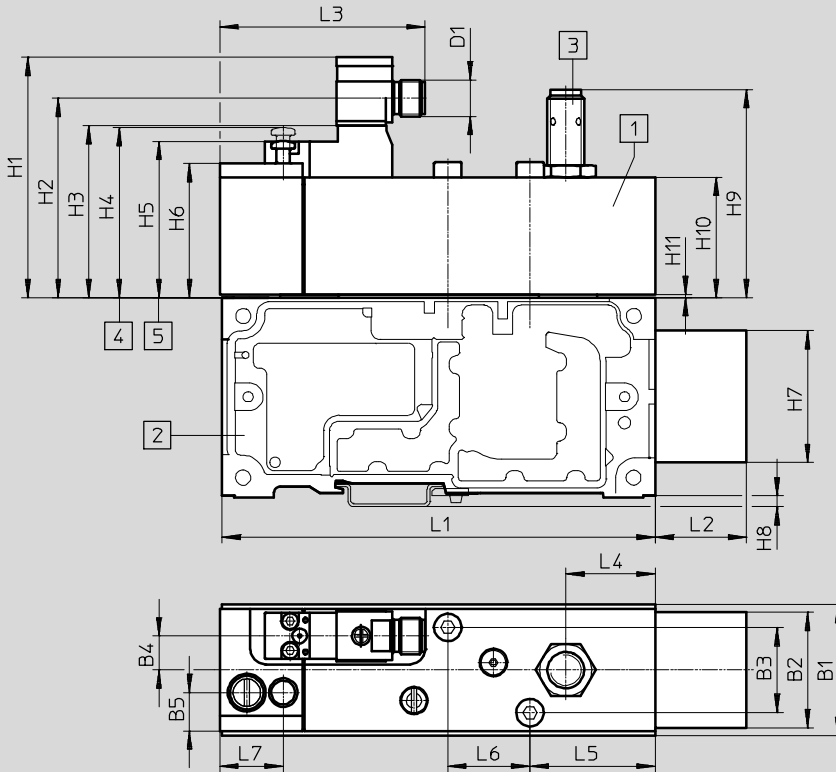


- 1** Soft-start valve, (port pattern to ISO 5599-2)
- 2** Manifold sub-base with connecting adapter (ducts 2 and 4), pneumatic connection G $\frac{1}{2}$
- 3** Soft-start valve optionally with sensor or protective cap
- 4** Neutral position (not actuated)
- 5** Switching position (actuated)

| Type | B1 | B2 | B3 | B4 | B5 | D1 | L1 | L2 | L3 | L4 | L5 | L6 | L7 |
|---------------------------|----|------|----|------|------|-------|-----|----|------|------|----|----|------|
| VABF-S6-1-P5A4-G12-4- ... | 43 | 36.5 | 28 | 11.2 | 12.6 | M12x1 | 142 | 30 | 67.3 | 29.3 | 41 | 27 | 20.8 |

| Type | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 | H9 | H10 | H11 |
|---------------------------|------|------|------|------|------|----|------|-----|------|------|-----|
| VABF-S6-1-P5A4-G12-4- ... | 78.9 | 65.5 | 56.4 | 55.9 | 51.5 | 44 | 41.2 | 3.5 | 68.3 | 39.5 | 1 |

Seal¹⁾ between soft-start valve and manifold sub-base



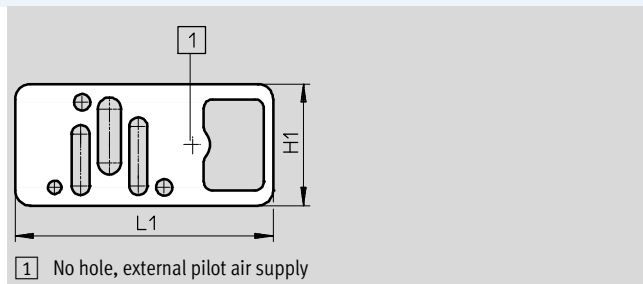
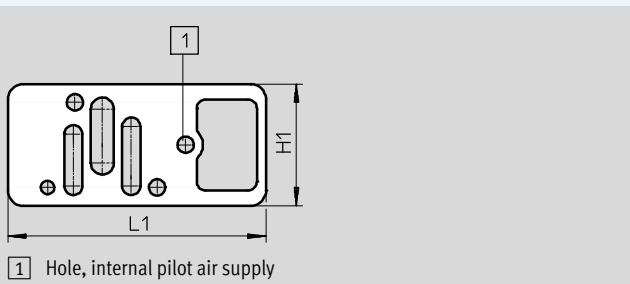


| Type | H1 | L1 |
|--------------|----|------|
| VABD-S6- ... | 40 | 84.8 |

1) Seals included with the manifold sub-base

Valve terminal VTSA/VTSA-F












Technical data – Soft-start valve, width 43 mm

| Ordering data | | | | |
|--|---|------------|----------|--------------------------|
| | Description | Weight [g] | Part No. | Type |
| Soft-start valve, 24 V DC | | | | |
|  | Without sensor output, pneumatic connection G $\frac{1}{2}$ | 590 | 558230 | VABF-S6-1-P5A4-G12-4-1 |
|  | With sensor output PNP, pneumatic connection G $\frac{1}{2}$ | 605 | 557377 | VABF-S6-1-P5A4-G12-4-1-P |
| | With sensor output NPN, pneumatic connection G $\frac{1}{2}$ | 605 | 558233 | VABF-S6-1-P5A4-G12-4-1-N |
| Soft-start valve, 110 V AC | | | | |
|  | Without sensor output, pneumatic connection G $\frac{1}{2}$ | 590 | 558228 | VABF-S6-1-P5A4-G12-4-2A |
| Manifold sub-base | | | | |
|  | Prepared for mounting of a soft-start valve (ports for duct 2 and 4 combined), pneumatic connection G $\frac{1}{2}$ | 570 | 556989 | VABV-S6-1Q-G12 |

Valve terminal VTSA/VTSA-F

FESTO


Accessories – Soft-start valve, width 43 mm




| Ordering data | | | | | |
|--|------|--|-----------------|----------------|-------------------------------------|
| Name | Code | Description | Part No. | Type | |
| Cover cap | | | | | |
|  | – | M12, for sealing the sensor opening | 10 pieces | 165592 | ISK-M12 |
| Electrical connection for soft-start valve | | | | | |
|  | P1 | <ul style="list-style-type: none"> Angled socket, type C, 2-pin, with LED Straight plug, M12x1, 2-pin 24 V DC | | 188024 | MSSD-EB-M12-MONO |
|  | GB | <ul style="list-style-type: none"> Straight socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541328 | NEBU-M12G5-K-5-LE4 |
|  | – | <ul style="list-style-type: none"> Angled socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541329 | NEBU-M12W5-K-5-LE4 |
|  | GG | <ul style="list-style-type: none"> Angled socket, type C, 3-pin, with LED | 2.5 m | 151688 | KMEB-1-24-2,5-LED |
| | GH | <ul style="list-style-type: none"> Open end, 3-wire | 5 m | 151689 | KMEB-1-24-5-LED |
| | GJ | <ul style="list-style-type: none"> 24 V DC, PVC | 10 m | 193457 | KMEB-1-24-10-LED |
| | GK | <ul style="list-style-type: none"> Angled socket, type C, 3-pin | 2.5 m | 151690 | KMEB-1-230AC-2,5 |
| | GL | <ul style="list-style-type: none"> Open end, 3-wire 230 V AC, PVC | 5 m | 151691 | KMEB-1-230AC-5 |
| Connecting cable for electrical connection of the proximity sensor | | | | | |
|  | – | <ul style="list-style-type: none"> Straight socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541328 | NEBU-M12G5-K-5-LE4 |
|  | GC | <ul style="list-style-type: none"> Angled socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541329 | NEBU-M12W5-K-5-LE4 |
|  | – | Modular system for connecting cables | | – | NEBU-... → Internet: nebu |
| Pressure gauge | | | | | |
|  | – | 0 ... 10 bar, pneumatic connection M5 | | 526323 | MA-27-10-M5 |
| Silencer | | | | | |
|  | U | Standard version, connecting thread (1 piece) | G $\frac{1}{2}$ | 6844 | U-$\frac{1}{2}$-B |
|  | A | Sintered version, connecting thread (10 pieces) | G $\frac{1}{2}$ | 1205863 | AMTE-M-LH-G12 |
| Pneumatic connection accessories | | | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms:</p> <p>Internet → connection technology, silencer, blanking plug</p> | | | | | |


Valve terminal VTSA/VTSA-F

Technical data – Vacuum block

Function

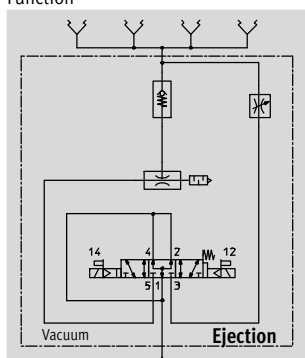

-  - Width, vacuum block 53 mm
-  - Voltage 24 V DC
-  - Operating pressure 4 ... 8 bar

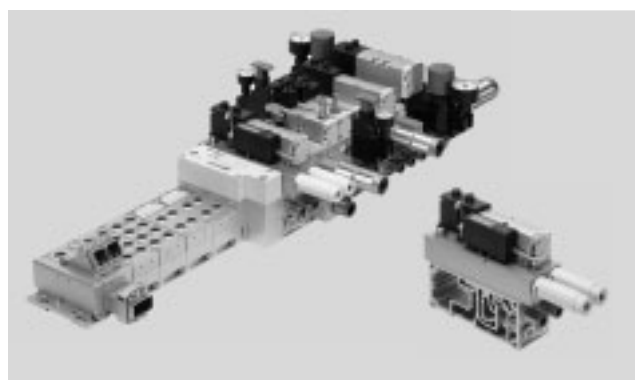


Description

The vacuum block can be integrated into the existing valve terminal VTSA/VTSA-F. To do this, the vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm. The vacuum block is used in conjunction

with a suction gripper to pick up, hold and place components. Picking up and holding is carried out by means of a vacuum by a suction gripper. Once the component has been positioned, it

is released by an ejector pulse. This ejector pulse is created by pressurising the vacuum system so that the vacuum briefly breaks down. The ejector pulse can be set.


 - Note
The vacuum block VABF-S4-1-V2B1 can be operated in combination with the vertical stacking for pilot air switch-off (intermediate plate VABF-S4-1-S plus 5/2-way valve) on the valve terminal VTSA.

Function

The intended use of the vacuum block VABF-S4-1-V2B1 ... is to generate a vacuum. The generated vacuum and a suction gripper produce a force by means of which a workpiece can be gripped and transported. The supply of compressed air for vacuum generation is controlled by a solenoid valve. The vacuum is generated by actuating solenoid coil 12.

The setpoint value set at duct B for the generated vacuum is monitored via a vacuum sensor (with switching output). Vacuum generation reverts to a self-holding phase after reaching the setpoint value. The vacuum block controls the vacuum generation process independently within the range of the set switching points (air-saving function).

The integrated solenoid valve is used to generate an ejector pulse by activating coil 14. The workpiece is thus safely released from the suction and the vacuum is rapidly broken down. The length of the ejector pulse can be influenced by the duration of the electrical pulse. The strength of the ejector pulse is influenced by the adjustable flow control valve.

 - Note
In the absence of electric or pneumatic supply when the valve is in the "create vacuum" or "air saving" state, the valve reverts to the "generate vacuum" position.

Operating mode of the air-saving function (LS)

If the desired threshold value (1) (turn off suction) is reached for the vacuum, vacuum generation is automatically switched off. Non-return valves prevent

the reduction of the vacuum. Nonetheless, leakage (e.g. due to rough workpiece surfaces) will slowly reduce the vacuum. If the pressure

drops below the set threshold value (2) (turn on suction), vacuum generation is switched on automatically.

Vacuum is generated until the set threshold value (1) (turn off suction) is reached again.

Threshold value to switch off suction (air-saving function) (1):


The vacuum generator is switched off simultaneously with the setting of

output Out A. The preset value is -700 mbar.

Threshold value to switch on suction (2):

The threshold value (2) should always be above the switching point of duct B (3) "vacuum sensing". The gap

between (2) and (3) should be at least 50 mbar.

 - Note
Setting options and further instructions are described in the operating instruction and/or documentation
VABF-S4-1-V2B1... in the Festo Support Portal.
→ Internet

Valve terminal VTSA/VTSA-F

Technical data – Vacuum block

| General technical data | | |
|---|-------|---|
| Valve function | | 5/3-way, pressurised |
| Design | | Non-modular |
| Mounting position | | Any |
| Nominal width of laval nozzle (vacuum generation) | [mm] | 2.0 |
| Ejector characteristics | | High vacuum, standard |
| Integrated functions | | <ul style="list-style-type: none"> • Electric ejector pulse valve • Flow control valve • On-off valve, electrical • Electric air-saving circuit • Non-return valve • Open silencer • Vacuum switch |
| Silencer design | | Open |
| Measured variable | | Relative pressure |
| Measuring principle | | Piezoresistive |
| Switching function | | Threshold value comparator |
| Protection against short circuit | | Yes |
| Protection against incorrect polarity | | For all electrical connections |
| Inductive protective circuit | | Adapted to MZ, MY, ME coils |
| Switching element function | | N/O contact |
| Threshold value setting range | [bar] | -0.999 ... 0 (recommended operating range: -0.95 ... -0.05) |
| Hysteresis setting range | [bar] | -0.9 ... 0 |
| Power supply, vacuum block | | Via own plug M12 |
| Pneumatic supply, vacuum block | | Via valve terminal VTSA/VTSA-F |
| Ejector pulse | | Intensity adjustable via flow control screw |
| Actuation type | | <ul style="list-style-type: none"> • Solenoid valve • Vacuum block |
| | | Electrically activated Vacuum generation via Venturi nozzle |
| Type of control - solenoid valve | | Piloted |
| Direction of flow | | Non-reversible |
| Exhaust function | | With flow control (duct 3 and 5) |
| Type of mounting | | Via through-hole, screwed onto manifold sub-base, width 26 mm |
| Manual override | | Detenting, non-detenting, covered |
| | | <ul style="list-style-type: none"> • for vacuum generation • for ejector pulse |
| | | Yes, solenoid coil 12 (is retained) Yes, solenoid coil 14 (non-detenting), (only effective when power supply switched off) |
| Valve switching status display | | LED |
| Pneumatic connections | | |
| Supply port | 1, 3 | Via the manifold sub-base of the valve terminal, width 26 mm |
| Exhaust port | 3/5 | Via modular silencer for vacuum block |
| Working port (vacuum port) | 2 | Via the manifold sub-base of the valve terminal (QS push-in fitting – vacuum), G¼ |
| Ports | 4 | Via the manifold sub-base of the valve terminal (sealed with blanking plug type B-¼) |

Valve terminal VTSA/VTSA-F

Technical data – Vacuum block

| Technical data, pressure switch - Vacuum block (delivery status) | |
|--|---|
| Duct A: air-saving function | |
| <ul style="list-style-type: none"> Switching behaviour Switching point [mbar] Hysteresis [mbar] Switching characteristic | Threshold value comparator –700 200 NO (normally open contact) |
| Duct B, vacuum sensing | |
| <ul style="list-style-type: none"> Switching behaviour Switching point [mbar] Hysteresis [mbar] Switching characteristic | Threshold value comparator –400 5 NO (normally open contact) |



Note

Setting options for duct A and duct B and further instructions are described in the operating instruction and/or documentation

VABF-S4-1-V2B1... in the Festo Support Portal.
 → Internet

| Electrical data | |
|--|---|
| Electrical connection | 4-pin plug to ISO 15407-2 (separate power supply to the vacuum block, not via valve terminal) |
| Nominal operating voltage [V DC] | 24 |
| Operating voltage range [V DC] | 21.6 ... 26.4 |
| Duty cycle ED [%] | 100 |
| Max. output current [mA] | 50 |
| Voltage drop [V] | ≤1.5 |
| Idle current [mA] | 50 ... 150 (dependent on the switching status of the solenoid coils) |
| Coil characteristics [V DC] | 24 |
| Power consumption (Coil characteristics) [W] | 1.3 |
| Overload protection | Yes |
| Accuracy (full scale) [% FS] | ±3 |
| Protection class to EN 60529 | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

| Electrical connection ¹⁾ | | | |
|-------------------------------------|---|--|--|
| | Connector plug M12x1, 4-pin to EN 61076-2-101 | Pin1 – + 24 V DC (brown (BN)) Pin2 – Out B (white (WH)) Pin3 – 0 V DC (blue (BU)) Pin4 – Out A (black (BK)) | Supply voltage Switching output B (duct B) 0 V DC Switching output A (duct A) |

1) Max. permissible signal line length: 5 m

Valve terminal VTSA/VTSA-F

Technical data – Vacuum block



| Operating and environmental conditions | |
|---|---|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating medium | Unlubricated operation |
| Operating pressure [bar] | 4 ... 8 |
| Nominal operating pressure [bar] | 6 |
| Pressure measuring range [bar] | -1 ... 0 |
| Partial vacuum [bar] | Up to approx. 0.9 (as a function of operating pressure) |
| Ambient temperature [°C] | 0 ... 50 |
| Temperature of medium [°C] | 0 ... 50 |
| Noise level LpA (at nominal operating pressure) [dB(A)] | 78 |

| Materials | |
|--------------------------------------|-----------------------------|
| Housing, jet nozzle | Wrought aluminium alloy |
| Screws in | Galvanised steel |
| Seals | NBR |
| Plug housing | Nickel-plated die-cast zinc |
| Plug contacts | Gold-plated brass |
| Inspection window on pressure sensor | PA |
| Pressure sensor keyboard | TPE-U |
| Note on materials | RoHS-compliant |

Pressure ratios, air consumption and flow rate

Vacuum as a function of operating pressure

Air consumption as a function of operating pressure

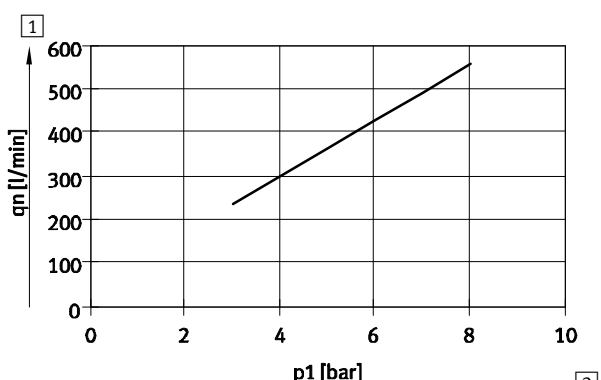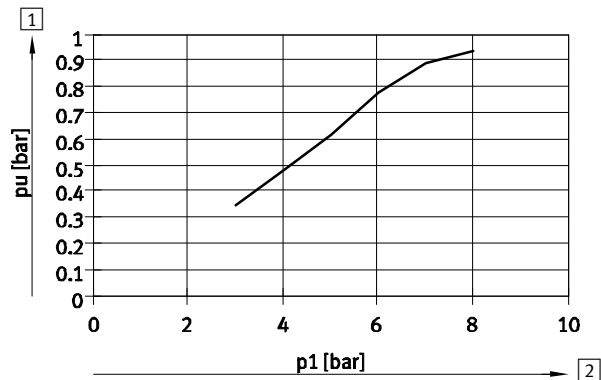

1 Vacuum

2 Operating pressure

1 Air consumption

2 Operating pressure


Valve terminal VTSA/VTSA-F

Technical data – Vacuum block

Dimensions

Download CAD data → www.festo.com

Vacuum block


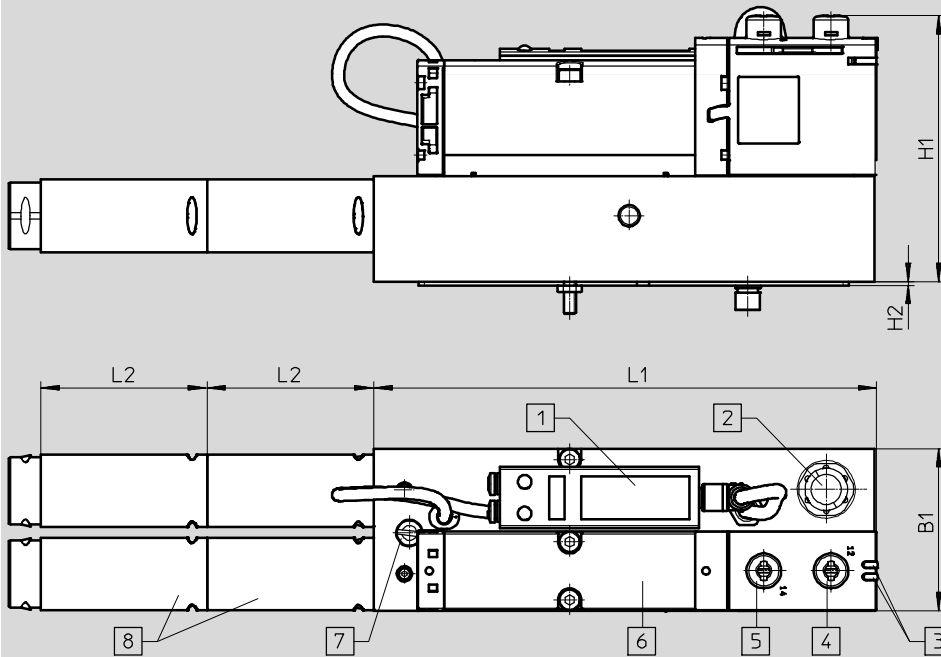







- | | | | |
|---|---|--|---|
| 1 Pressure sensor with LCD display and operating buttons | 3 LED switching status display for solenoid valve | 5 Manual override for ejector pulse (only effective when the power supply is switched off) | 6 Solenoid valve |
| 2 Connector for electrical connection and vacuum sensing (M12, 4-pin) | 4 Manual override for vacuum generation | | 7 Flow control screw for adjusting the intensity of the ejector pulse |
| | | | 8 Modular silencer |

| Type | B1 | H1 | H2 | L1 | L2 |
|------------------------|----|------|-----|-------|------|
| VABF-S4-1-V2B1-C-VH-20 | 53 | 87.1 | 1.2 | 164.7 | 54.2 |

Valve terminal VTSA/VTSA-F

Technical data – Vacuum block






| Ordering data | | | | |
|--|------------------|--|----------|---|
| | Code | Description | Part No. | Type |
| Vacuum block for valve terminal VTSA/VTSA-F | | | | |
|  | VB | Vacuum block for valve terminal VTSA/VTSA-F with air-saving function and adjustable ejector pulse | 1120 g | 571425 VABF-S4-1-V2B1-C-VH-20 |
| Manifold sub-base | | | | |
|  | L ²⁾ | For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4 | 26 mm | – ¹⁾ VABV-S4-... |
| | LK ²⁾ | For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4 with small QS fitting | 26 mm | – ¹⁾ VABV-S4-... |
| Connecting cable | | | | |
|  | – | <ul style="list-style-type: none"> • Straight socket, M12x1, 5-pin • Open end, 4-wire | 2.5 m | 550326 NEBU-M12G5-K-2.5-LE4 |
|  | – | <ul style="list-style-type: none"> • Straight socket, M12x1, 5-pin • Open end, 4-wire | 5 m | 541328 NEBU-M12G5-K-5-LE4 |
|  | – | <ul style="list-style-type: none"> • Straight socket, M12x1, 4-pin • Straight plug, M12x1, 4-pin | 2.5 m | 18684 KM12-M12-GSGD-2.5 |
| | – | <ul style="list-style-type: none"> • Straight socket, M12x1, 4-pin • Straight plug, M12x1, 4-pin | 5 m | 18686 KM12-M12-GSGD-5 |
|  | GC | <ul style="list-style-type: none"> • Angled socket, M12x1, 5-pin • Open end, 4-wire | 5 m | 541329 NEBU-M12W5-K-5-LE4 |
|  | – | Modular system for connecting cables | – | NEBU-... ➔ Internet: nebu |
| Pneumatic connection accessories | | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories ➔ page 207 or on the Internet via the individual search terms:</p> <p>Internet ➔ connection technology, silencer, blanking plug</p> | | | | |


1) The manifold sub-base for use with the vacuum block can only be ordered via the valve terminal configurator and therefore does not have a separate part number.

2) Code letter within the order code for a valve terminal configuration.

Valve terminal VTSA/VTSA-F

Adaptation to width 65 mm

-  - Valve width 65 mm
ISO size 3
-  - Flow rate
Up to 4000 l/min
-  - Operating pressure
-0.9 ... 10 bar
-  - Voltage
24 V DC
-  - Temperature range
-5 ... +50 °C

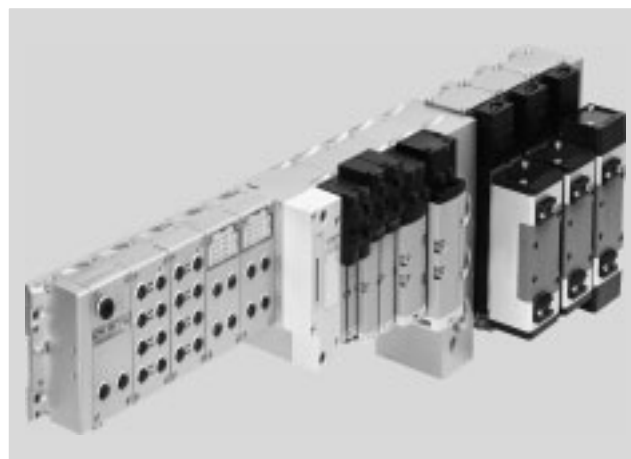

Description

Function

The adaptation of valves, regulator and flow control plates of width 65 mm, ISO size 3 in type 04

technology further expands the scope of application of the valve terminal VTSA/VTSA-F:

- 5 valve sizes with pneumatic function integration on a valve terminal VTSA/VTSA-F.
- Max. flow rate up to 4000 l/min.
- Max. 26 solenoid coils of width 65 mm, ISO size 3 can be adapted to the valve terminal VTSA/VTSA-F. The total number of solenoid coils of all widths must not exceed 32.

Restrictions

End plate with pilot air selector

If components of ISO size 3 are used, the end plate with pilot air selector is not available for selection.

Pilot air supply via adapter plate

If no pneumatic components are installed on the left-hand side of the adapter plate (electrical components only), ducts 12 and 14 of the adapter plate must be sealed with blanking plugs.

Pressure zones

Max. 2 pressure zones are possible with ISO size 3.

Valve terminal VTSA/VTSA-F

Key features – Adaptation to width 65 mm


Equipment options

Valve functions for width 65 mm, ISO size 3

- 5/2-way valve
 - Single solenoid, pneumatic spring/mechanical spring
 - Double solenoid
 - Double solenoid with dominant signal
- 5/3-way valve
 - Mid-position pressurised
 - Mid-position closed
 - Mid-position exhausted

Special features

| Fieldbus connection/CPX terminal | Multi-pin plug connection | AS-Interface | Combinable |
|--|--|--|---|
| <ul style="list-style-type: none"> • Max. 32 valve positions/ max. 32 solenoid coils • Any compressed air supply • Any number of pressure zones | <ul style="list-style-type: none"> • Max. 32 valve positions/ max. 32 solenoid coils • Parallel modular valve linking • Any compressed air supply • Any number of pressure zones | <ul style="list-style-type: none"> • 1 to 8 valve positions/ max. 8 solenoid coils. Auxiliary power supply is required. | <ul style="list-style-type: none"> • Width 65 mm: valve flow rate up to 4000 l/min • Width 18 mm, 26 mm, 42 mm and 52 mm can be combined on a single valve terminal. Width 65 mm is mounted at the end of the VTSA/VTSA-F configuration via adapter VABA |

 Note
The total number of solenoid coils of all widths must not exceed 32.

Valve terminal configurator

➔ Internet: www.festo.com

A valve terminal configurator is available to help you select a suitable VTSA/VTSA-F valve terminal. This makes it much easier to order the right product.

The valve terminals are fully assembled according to your order specification and are individually checked. This reduces assembly and installation time to a minimum.

Order a valve terminal VTSA using the order code:


Ordering system for VTSA
➔ Internet: vtsa

Ordering system for CPX
➔ Internet: cpx

Order a valve terminal VTSA-F using the order code:

Ordering system for VTSA-F
➔ Internet: vtsa-f

Ordering system for CPX
➔ Internet: cpx

 Note
Please note that despite the basic configuration for ISO size 3 valves


- the manual override is always non-detenting
- exhaust air 3/5 of the adapter plate for ISO size 3 is always routed separately
- there is no option for 90° connection plate, outlet at bottom
- there is no option for sintered silencers
- there is no option for pneumatic accessories

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components, width 65 mm

FESTO

Overview of modules for width 65 mm, ISO size 3

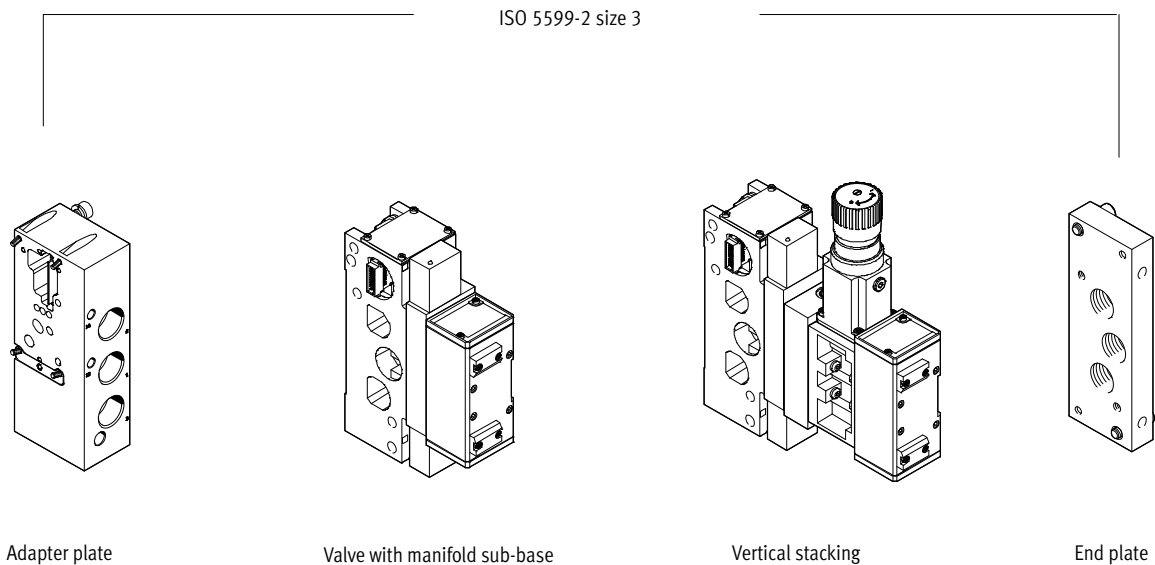

Pneumatics


| Pneumatic modules | Vertical stacking | Additional modules | |
|---|--|--|---|
| <ul style="list-style-type: none"> Manifold sub-base for ISO valves Size 3: (G1/2) 4000 l/min | <ul style="list-style-type: none"> Valves Flow control plates Intermediate pressure regulator plates Pressure gauge Creation of pressure zones with 10 bar or vacuum (with external pilot air supply only) | <ul style="list-style-type: none"> Flow control plates: one-way flow control valves can be mounted between the manifold block and the valve so that the speed of travel can be set separately for single and double-acting cylinders Pressure regulators: intermediate pressure regulator plates for setting the contact pressure of a cylinder, either separately on duct 1, 2 or 4, or shared by 2 and 4 Pressure gauge on pressure regulator | <ul style="list-style-type: none"> Creation of pressure zones: maximum of 2 pressure zones, up to 10 bar as well as for vacuum, are possible for all valve sizes. Compressed air supply at both sides is essential in this case Regulated external pilot air supply should be used for pressures < 3 bar |
| <p>Adapter plate</p> <ul style="list-style-type: none"> Pressure supply connection duct 1 Exhaust connection duct 3/5 (separated) External pilot air supply connection (optional) for pneumatic components on the left-hand side | <p>Information on valve activation for ISO size 3</p> <ul style="list-style-type: none"> All intermediate solenoid plates feature a non-detenting manual override Valve terminals with internal pilot air supply: restricted pressure range Valve terminals with external pilot air supply: pressure zones up to 10 bar or vacuum operation possible. In this case, the pilot air supply must be regulated and supplied externally. | <p>Flexible compressed air supply</p> <ul style="list-style-type: none"> Compressed air supply via the adapter plate or the right-hand end plate With large valve terminals, compressed air can be supplied at both sides | <p>Options</p> <ul style="list-style-type: none"> Vacant positions for subsequent extensions All pneumatic connections can also be supplied with an NPT thread |
| <p>Pneumatic modules</p> <ul style="list-style-type: none"> Manifold sub-base for one ISO valve Pilot control via intermediate solenoid plate ISO size 3 | | | |

Valve terminal VTSA/VTSA-F

Peripherals – Pneumatic components, width 65 mm

FESTO

Pneumatic components of width 65 mm, ISO size 3

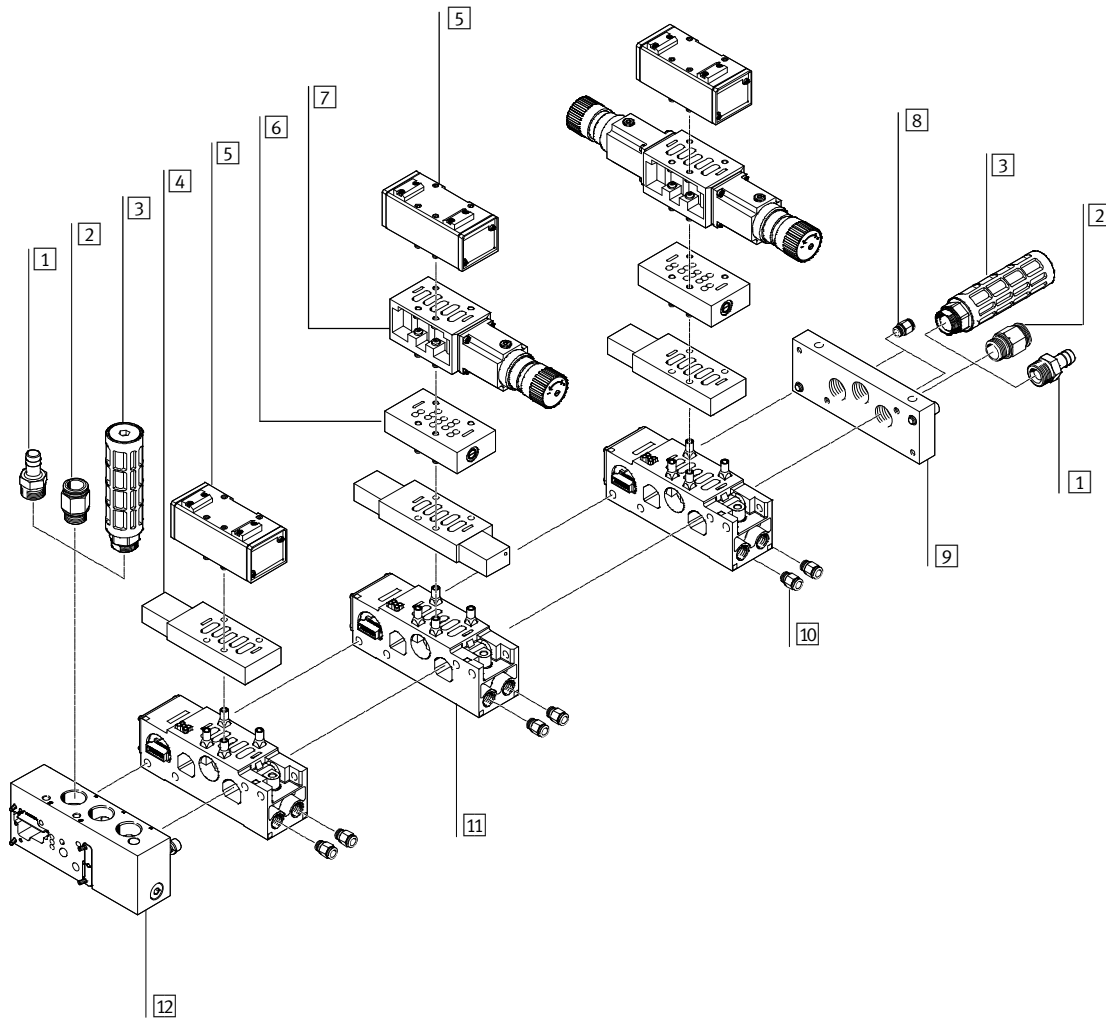


| | Brief description | → Page/Internet |
|----|---------------------------------------|---|
| 1 | Female hose connector 1" | – |
| 2 | Fitting | For compressed air supply |
| 3 | Silencer | For exhaust air |
| 4 | Intermediate solenoid plate | For pneumatically actuated standard valves |
| 5 | Valve | Pneumatically actuated standard valve |
| 6 | Flow control plate | For exhaust air flow control |
| 7 | Intermediate pressure regulator plate | – |
| 8 | Fitting | For pilot air |
| 9 | End plate | Right-hand end plate |
| 10 | Fitting | For supply air (QS 16, QS 12) |
| 11 | Manifold sub-base | For linking the valve terminal |
| 12 | Adapter plate VABA ... | For adaptation of ISO size 3 components to valve terminal VTSA/VTSA-F |

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components, width 65 mm

Key features – Pneumatic components

Adapter plate VABA ...




The adapter plate VABA ... is used for adapting valves of width 65 mm ISO size 3 to valve terminal VTSA/VTSA-F. Connections for supply/exhaust air

and pilot air supply are available. The external pilot air used here supplies the valve terminal with valves of width 18 ... 52 mm on the left-hand

side of the adapter. The external pilot air supply for the valves with a width of 65 mm, ISO size 3 is provided via the end plate IEPR

Blanking plates




Blanking plates are used to seal off vacant valve positions. No intermediate solenoid plate is

mounted underneath the blanking plate. This depends on the valve used and must be ordered with the valve if

the terminal is expanded at a later date.

Valves and pilot control



The valves used are pneumatically actuated standard valves that are controlled by means of an intermediate solenoid plate.

Valves and flow lines

The selection of pilot air supply is made at the intermediate solenoid plate by configuring two plugs. Air can

be taken from the supply air, or from a separate air supply. A separate pilot air supply is required in principle if

supply pressure is less than 3 bar (including vacuum). In this case it is advisable to restrict

the pilot air supply to max. 10 bar with a suitable regulator.

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components, width 65 mm



The following circuit symbols are shown as solenoid valves and are the combination (set) consisting of pneumatic valve with corresponding intermediate solenoid plate. The symbols printed on the components can therefore vary.


| Valve function | | | |
|----------------|----------------|-------------|--|
| Terminal code | Circuit symbol | Width 65 mm | Description |
| 0 | | ■ | 5/2-way valve, single solenoid <ul style="list-style-type: none"> • With intermediate solenoid plate • Mechanical spring |
| - | | ■ | 5/2-way valve, single solenoid <ul style="list-style-type: none"> • With intermediate solenoid plate • Pneumatic spring |
| M | | ■ | 5/2-way valve, single solenoid <ul style="list-style-type: none"> • With intermediate solenoid plate • Pneumatic spring, air spring supplied by external pilot air |
| J | | ■ | 5/2-way valve, double solenoid <ul style="list-style-type: none"> • With intermediate solenoid plate |
| D | | ■ | 5/2-way valve, double solenoid <ul style="list-style-type: none"> • With intermediate solenoid plate • Dominant signal |
| G | | ■ | 5/3-way valve <ul style="list-style-type: none"> • With intermediate solenoid plate • Mid-position closed |
| E | | ■ | 5/3-way valve <ul style="list-style-type: none"> • With intermediate solenoid plate • Mid-position exhausted |
| B | | ■ | 5/3-way valve <ul style="list-style-type: none"> • With intermediate solenoid plate • Mid-position pressurised |
| L | | ■ | Blanking plate |

- - Note
 A filter must be installed upstream of intake air getting into the valve (e.g. when operating a suction cup). This prevents any foreign matter in the

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components, width 65 mm


Vertical stacking, width 65 mm




Additional components can be added to each ISO size 3 valve position between the sub-base (manifold sub-base) and the valve. These functions

are known as vertical stacking modules and enable special functioning or control of an individual valve position.

Vertical stacking components

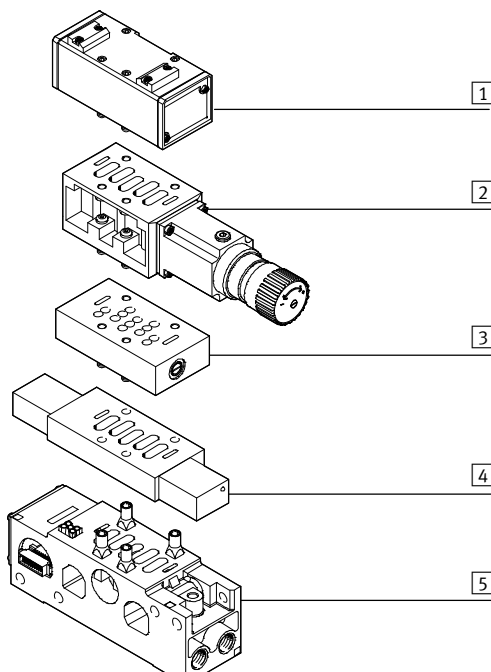


- 1 Valve ISO size 3
- 2 Intermediate pressure regulator plate
- 3 Flow control plate
- 4 Intermediate solenoid plate
- 5 Manifold sub-base with port pattern to DIN ISO 5599-2

 Note
Certain combinations are not possible due to the design of the individual vertical stacking components.

Valve terminal VTSA/VTSA-F


Key features – Pneumatic components, width 65 mm

Flow control plate, width 65 mm



Intermediate plate with integrated exhaust air restrictors at ports 3 and 5 for regulating cylinder speed.

Intermediate pressure regulator plate and pressure gauge, for width 65 mm



Intermediate plate with integrated pressure regulator for regulating pressure at

- Ports 2 and 4 (B, A)
- Port 4 (A)
- Port 2 (B)
- Port 1 (P)

Easy pressure adjustment


Pressure gauges can be screwed directly into the intermediate pressure regulator plate to adjust the pressure.

| Functions | | | |
|-------------|----------------|-------------|--|
| Code | Circuit symbol | Width 65 mm | Description |
| X | | ■ | Flow control plate (with two one-way flow control valves for exhaust air flow control) |
| ZA | | ■ | Intermediate pressure regulator plate, port 1 |
| ZB | | ■ | Intermediate pressure regulator plate, port 4 |
| ZC | | ■ | Intermediate pressure regulator plate, port 2 |
| ZD | | ■ | Intermediate pressure regulator plate, ports 2 and 4 |
| S T R | | ■ | Isolating disc for creating pressure zones Duct separation 1, 3, 5 Duct separation 1 Duct separation 3, 5 |
| T | | - | Pressure gauge for regulator, max. 10 bar |
| - | | - | Pressure gauge for regulator, max. 16 bar |

Valve terminal VTSA/VTSA-F

Key features – Pneumatic components, width 65 mm

Manifold sub-base for valves, width 65 mm




Adaptation to size 65 mm ISO size 3 is based on a modular system which consists of manifold sub-bases and valves. The manifold sub-bases contain a duct seal and an electrical inter-linking module, are screwed together and thus form the support system for the valves. Inside the manifold

sub-bases are the connection ducts for supplying compressed air to and exhausting from the valve terminal as well as the working lines for the pneumatic cylinders for each valve. Each manifold sub-base is connected to the next using two screws.

Individual valve terminal sections can be isolated and further manifold sub-bases inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended, even for width 65 mm, ISO size 3.

Port pattern to ISO 5599-2 of the manifold sub-base for valves with width 65 mm

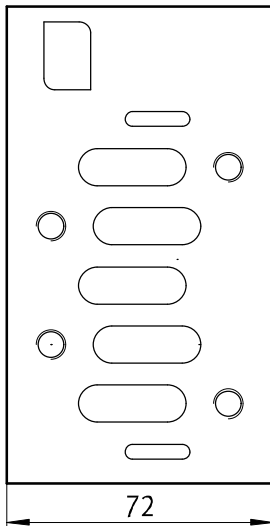


Valve terminal VTSA/VTSA-F

Key features – Pneumatic components, width 65 mm

Compressed air supply and exhausting

Right-hand end plate



With the adaptation to width 65 mm ISO size 3, compressed air is supplied via the right-hand end plate and/or the adapter plate VABA

Exhausting is via silencers or ports for ducted exhaust air on the adapter plate VABA ... and/or on the right-hand end plate.

The external pilot air supply for the valves with a width of 65 mm, ISO size 3 is provided via the end plate IEPR

Pilot air supply

When using valves with a width of 65 mm, the internal/external pilot air supply for the valves with a width of 18 ... 52 mm is provided via the adapter plate VABA-.... The external pilot air supply for the valves with a width of 65 mm is provided via the right-hand end plate IEPR

Internal pilot air supply

Internal pilot air supply can be selected if the working pressure is between 3 ... 10 bar. The pilot air supply is then branched from the compressed air supply 1 using an internal connection. Ports 12 and 14 on the right-hand end plate should be sealed with a blanking plug.

External pilot air supply


If the working pressure is not within the range from 3 ... 10 bar, you must operate the valves with a width of 65 mm, ISO size 3 using external pilot air supply. The pilot air supply is then supplied via ports 12 and 14 on the right-hand end plate.



Note

If a gradual pressure build-up is required in the system by means of an external soft-start valve, then external pilot air should be selected whereby the pilot pressure is already applied at the point of switch-on.

Creating pressure zones




Different supply pressures are possible in the area containing the valves with a width of 65 mm by installing isolating discs between two manifold blocks. When doing this it

should be noted that the isolating disc is inserted into the manifold sub-base from the right. The supply and exhaust is effected on the left-hand side via the adapter plate VABA ... and via the


right end plate. Usually, only duct 1 has to be isolated. In special cases, isolating discs may also be inserted into exhaust ducts 3 and 5.

Manual override (MO)

MO with automatic return (non-detenting)



- 1 Press in the stem of the manual override using a pointed object or screwdriver. Valve is in switching position.



- 2 Remove the pointed object or screwdriver. The valve spring force pushes the stem of the manual override back. The valve returns to its initial position (not with double solenoid valve code J, D).

Valve terminal VTSA/VTSA-F

Key features – Electrical components, width 65 mm

Electrical connection concept

Replacing the solenoid coil fuse

Each double solenoid coil is protected with a (fast-blowing) 0.315 A fuse. These fuses are located behind the

cover of each manifold sub-base on the printed circuit board. Each single solenoid manifold sub-base has one


fuse, while each double solenoid manifold sub-base has two fuses.



Note

Make sure that there is sufficient clearance for maintenance purposes.

Changing the solenoid coil fuse

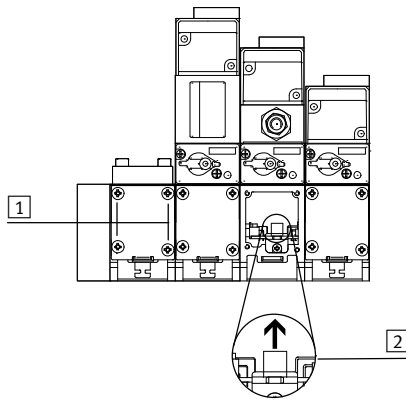


- 1 Loosen the fastening screws in the cover
- 2 Carefully remove the fuse from its base.
Right fuse for valve solenoid 14.
Left fuse for valve solenoid 12.

Valve terminal VTSA/VTSA-F

Key features – Assembly, width 65 mm

Rear side mounting




1 Blind hole for rear side mounting

The rear side of the manifold sub-bases has holes (blind holes) for mounting the valve terminal on machines or metal racks (rear side mounting).

M8 threads need to be cut for this purpose.

Wall mounting in the area of the adaptation to width 65 mm, ISO size 3

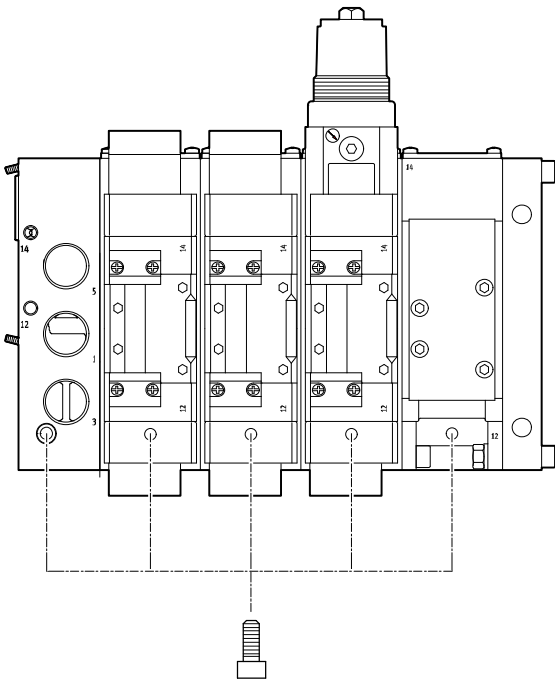

- With screws M8 on the adapter plate and the manifold sub-bases
- Holes (blind holes) on the underside of the manifold sub-bases
- Hole (through-hole) in the adapter plate

 Note

The mounting holes of every second manifold sub-base must be used for the wall mounting of a valve terminal VTSA-ASI in size ISO 3.

Valve terminal VTSA/VTSA-F

Technical data – General technical data, width 65 mm

FESTO

| General technical data for valve functions | | |
|---|--|-----------------|
| Design | <ul style="list-style-type: none"> Valves: Piston spool valve Intermediate pressure regulator plate: Pressure regulator with secondary exhausting | |
| Width [mm] | 65 | |
| Nominal size [mm] | 14.5 | |
| Type of mounting | <ul style="list-style-type: none"> Valves: With through-holes on the manifold sub-base Flow control plate: With through-holes on the manifold sub-base Intermediate pressure regulator plate: With through-holes on the manifold sub-base | |
| Mounting position | Any | |
| Manual override | Non-detenting | |
| Pneumatic connections – Threaded connection | | |
| Supply air | 1 | G1 |
| Exhaust air | 3/5 | G1 |
| Working ports | 2/4 | G $\frac{1}{2}$ |
| Pilot air supply | 12/14 | G1/8 |

| Technical data | | | | | | | | | | |
|--|---------------|-------------------------------|-----|-------------|----------------|----------------|------------------|-------------------|---------------------------------------|------|
| Valve function | Terminal code | Valve switching times in [ms] | | | Flow direction | | Type of reset | | Standard nominal flow rate in [l/min] | |
| | | On | Off | Change-over | Reversible | Non-reversible | Pneumatic spring | Mechanical spring | | |
| 5/2-way, double solenoid | J | – | – | 8 | ■ | – | – | – | 4500 | |
| 5/2-way, double solenoid with dominant signal | D | 29 | 36 | – | ■ | – | – | – | 4500 | |
| 5-2-way single solenoid, air spring supplied by external pilot air | M | 29 | 36 | – | ■ | – | ■ | – | 4500 | |
| 5/2-way, single solenoid | – | 29 | 36 | – | – | ■ | ■ | – | 4500 | |
| 5/2-way, single solenoid | O | 17 | 61 | – | ■ | – | – | ■ | 4500 | |
| 5/3-way, closed ¹⁾ | G | 17 | 61 | – | ■ | – | – | ■ | 3600 | |
| 5/3-way, exhausted ¹⁾ | E | 18 | 63 | – | ■ | – | – | ■ | 3800 | |
| 5/3-way, pressurised ¹⁾ | B | 16 | 60 | – | ■ | – | – | ■ | 3800 | |
| Intermediate plate | | | | | | | | | | |
| For single solenoid valves (MUH-ZP-D-3-24G) | – | – | – | – | – | – | ■ | – | ■ | – |
| For double solenoid, 5/3-way and dominant valves (MUHX2-ZP-D-3-24G) | – | – | – | – | – | – | ■ | – | ■ | – |
| For single solenoid valves, air spring supplied by external pilot air (MUH-ZP-D-3-L-24G) | – | – | – | – | – | – | ■ | – | ■ | – |
| Intermediate pressure regulator plate | | | | | | | | | | |
| LR-ZP-A-D- | ZB | – | – | – | – | – | – | – | – | 2300 |
| LR-ZP-B-D- | ZC | – | – | – | – | – | – | – | – | 2300 |
| LR-ZP-B-D- | ZA | – | – | – | – | – | – | – | – | 1800 |
| LR-ZP-A/B-D- | ZD | – | – | – | – | – | – | – | – | – |

1) If neither solenoid coil is energised, the valve assumes its mid-position by means of spring force.
If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve terminal VTSA/VTSA-F

Technical data – General technical data, width 65 mm

| Operating and environmental conditions | |
|--|---|
| Valve functions, adapter plate | |
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/ pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure for valve terminal • With ext. pilot air supply • With int. pilot air supply | -0.9 ... +10 3 ... 10 |
| Pilot pressure for valve terminal | 3 ... 10 |
| Operating pressure for valve terminal • With ext. pilot air supply • With int. pilot air supply | -0.9 ... +10 (for reversible valves, for non-reversible valves 2 ... 10) 3 ... 10 (for mech. return valves, for pneum. return valves 2 ... 10) |
| Pilot pressure for valves | 3 ... 10 (for mech. return valves, for pneum. return valves 2 ... 10) |
| Pressure regulation range | 0 ... 12 (for intermediate pressure regulator plate) |
| Ambient temperature | -5 ... +50 |
| Temperature of medium | -5 ... +50 |
| Mounting position | Any |
| Certification | c UL us - Recognized (OL) |
| CE marking (see declaration of conformity) | In accordance with EU EMC Directive ¹⁾ (for intermediate plate MUH ...) |
| Relative air humidity | 90 |

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

| Electrical data - Solenoid coil | |
|--|------------------------------------|
| Protection against electric shock (protection against direct and indirect contact to EN 60204-1/IEC 204) | By means of PELV power supply unit |
| Operating voltage [V] | 24 DC ±10% |
| Electrical power [W] consumption per coil | 3.1 (130 mA at 24 V DC) |
| Duty cycle ED | 100% (50% concurrence) |
| Protection class to EN 60529 | IP65 (in assembled state) |
| Relative air humidity [%] | 90% at 40 °C, non-condensing |

| Electrical data – Adapter plate | |
|---|--|
| Width | 60 mm |
| Operating voltage [V] | 24 DC ±10% |
| Max. acceptable current [mA] load per signal | 500 |
| Duty cycle ED | 100% |
| Protection class | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

Valve terminal VTSA/VTSA-F

Technical data – General technical data, width 65 mm

| Materials | |
|---------------------------------------|---------------------------|
| Valves | Die-cast aluminium, steel |
| Adapter plate | Wrought aluminium alloy |
| Seals | NBR |
| Flow control plate | Anodised aluminium, brass |
| Intermediate pressure regulator plate | Die-cast aluminium, steel |
| Piston spool, screws | Steel |
| Note on materials | RoHS-compliant |

| Product weight | |
|---------------------------------------|------|
| Approx. weight | [g] |
| Adapter plate | 2600 |
| Manifold sub-base | 1120 |
| Right-hand end plate | 1120 |
| Intermediate solenoid plate | 500 |
| Valves | |
| • Single solenoid, double solenoid | 760 |
| • Mid-position | 840 |
| Blanking plate | 180 |
| Flow control plate | 850 |
| Intermediate pressure regulator plate | |
| • P, B, A | 1120 |
| • A/B | 1770 |


Valve terminal VTSA/VTSA-F

Technical data – Adaptation to width 65 mm

Dimensions

Download CAD data → www.festo.com

Adapter plate with components, width 65 mm

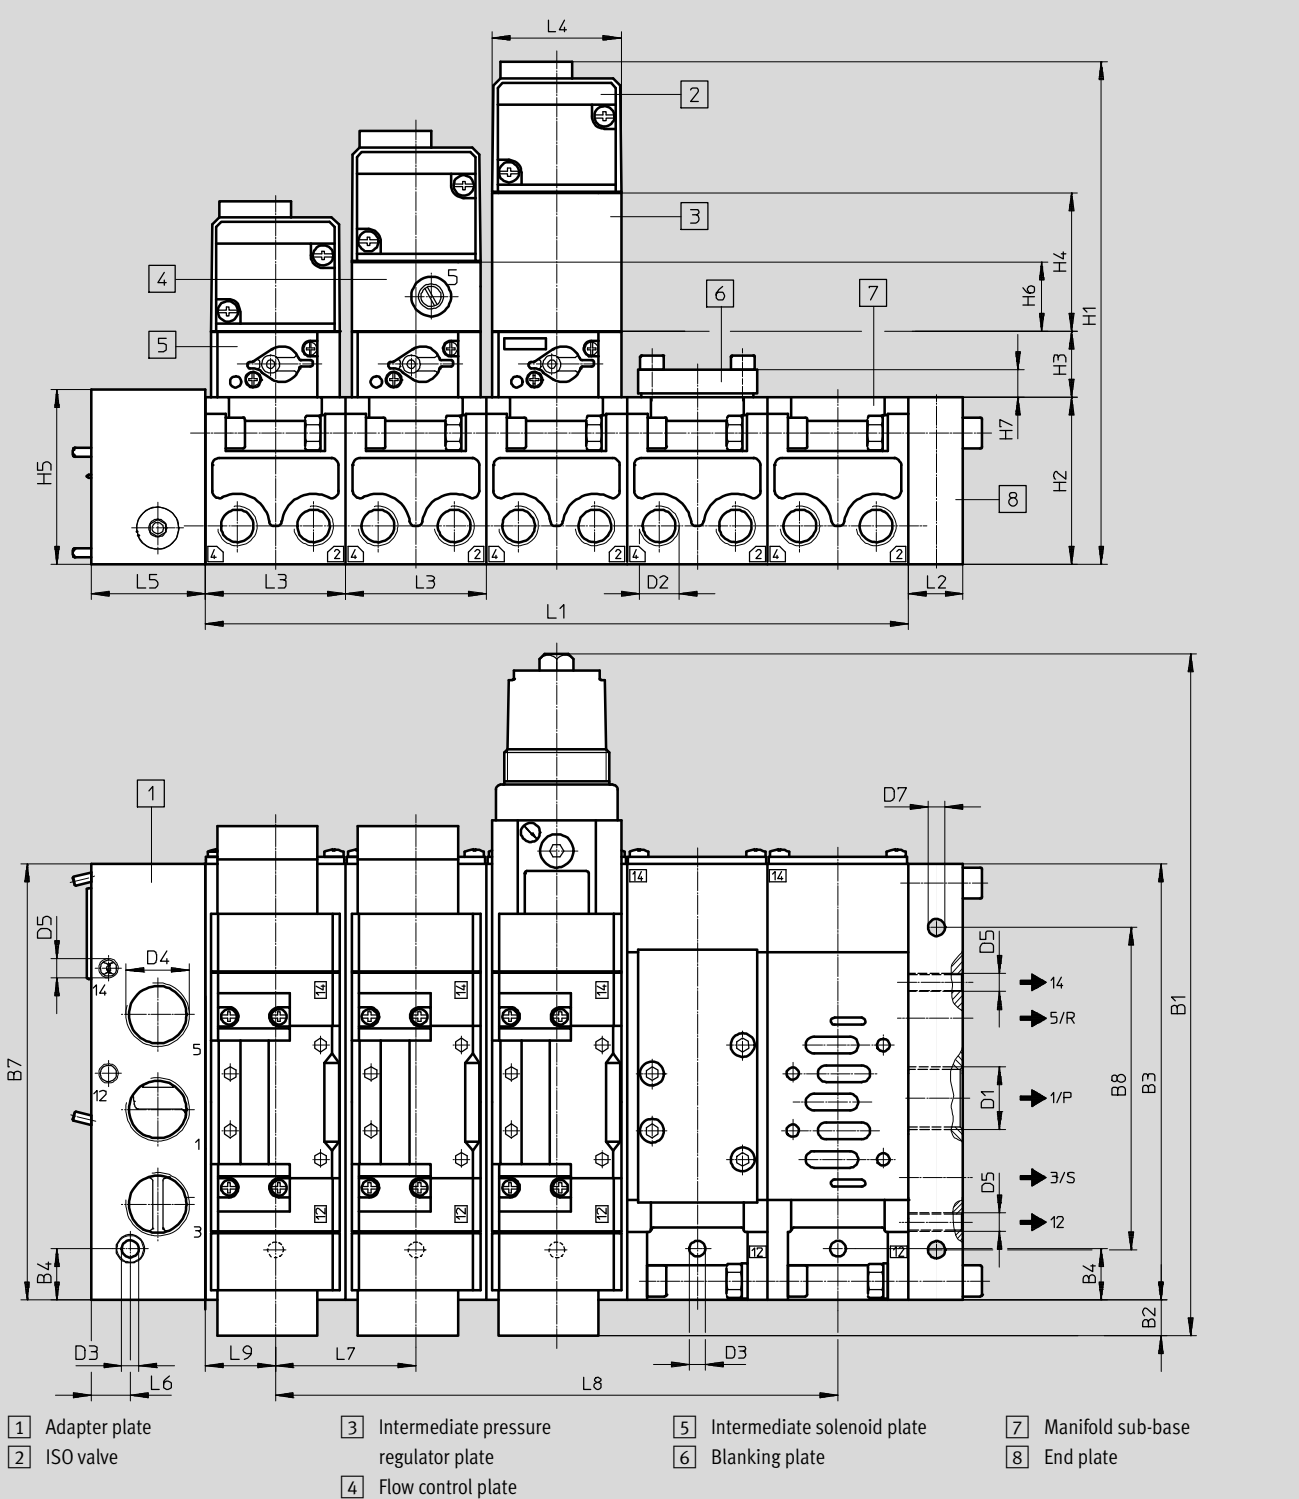

| Type | | ~B1 | B2 | B3 | B4 | B7 | B8 | D1 | D2 | D3 | D4 | D5 | D7 |
|---------------------|------|-----|----|-----|----|-----|-----|----|----|----|----|----|----|
| VABA-S6-7-S2-3-P... | [mm] | 315 | 6 | 230 | 27 | 230 | 170 | G1 | G½ | 9 | G1 | G¼ | 9 |

| Type | | H1 | H2 | H3 | H4 | H5 | H6 | H7 | L1 ¹⁾ | L2 | L3 | L4 | L5 | L6 | L7 | L8 ¹⁾ | L9 |
|---------------------|------|-----|----|----|----|----|----|------|------------------|----|----|----|----|------|----|------------------|----|
| VABA-S6-7-S2-3-P... | [mm] | 235 | 82 | 28 | 63 | 92 | 29 | 21.5 | nx72 | 28 | 72 | 70 | 40 | 20.5 | 72 | (n-1)x72 | 36 |

1) n = number of valves


Valve terminal VTSA/VTSA-F

Technical data – Dimensions, width 65 mm

Dimensions

Download CAD data → www.festo.com

Manifold sub-base for valves, width 65 mm

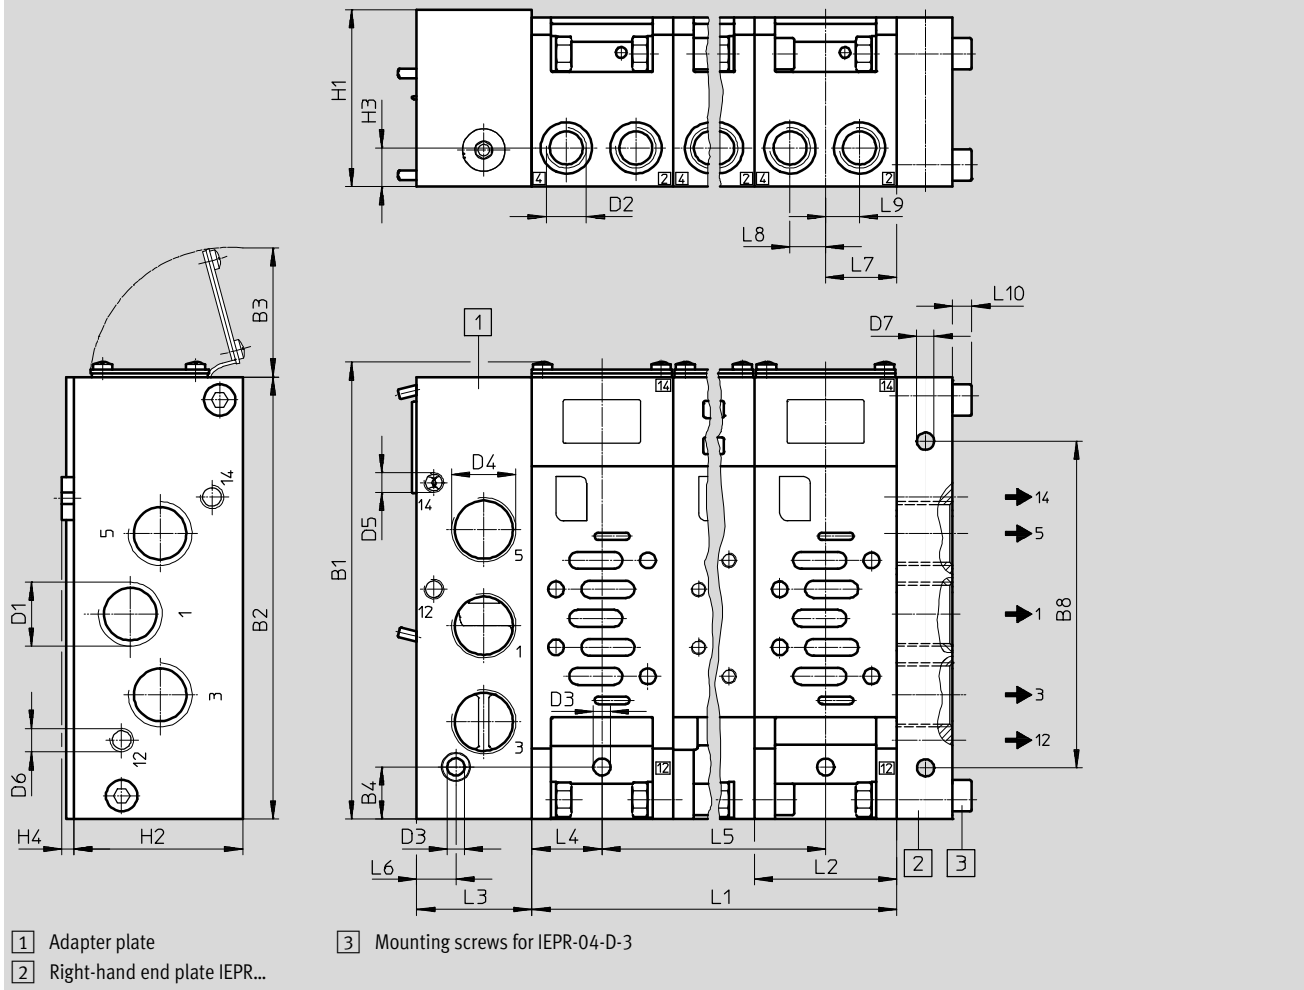

| Type | | ~B1 | B2 | B3 | B4 | B8 | D1 | D2 | D3 | D4 | D5 | D6 | D7 |
|------------------|------|----------|-----|---------|----|-----|----|----|-----|----|----|----|----|
| VIGI/VIGM-04-D-3 | [mm] | 237 max. | 230 | 64 max. | 27 | 170 | G1 | G½ | 9.0 | G1 | G¼ | G¼ | 9 |

| Type | | H1 | H2 | H3 | H4 | L1 ¹⁾ | L2 | L3 | L4 | L5 ¹⁾ | L6 | L7 | L8 | L9 | L10 |
|------------------|------|----|----|----|----|------------------|----|----|----|------------------|------|----|----|----|-----|
| VIGI/VIGM-04-D-3 | [mm] | 92 | 82 | 20 | 5 | nx72 | 72 | 60 | 36 | (n-1)x72 | 20.5 | 36 | 18 | 18 | 10 |

1) n = number of valves


Valve terminal VTSA/VTSA-F

Technical data – Dimensions, width 65 mm

Dimensions


Download CAD data → www.festo.com

Intermediate pressure regulator plate

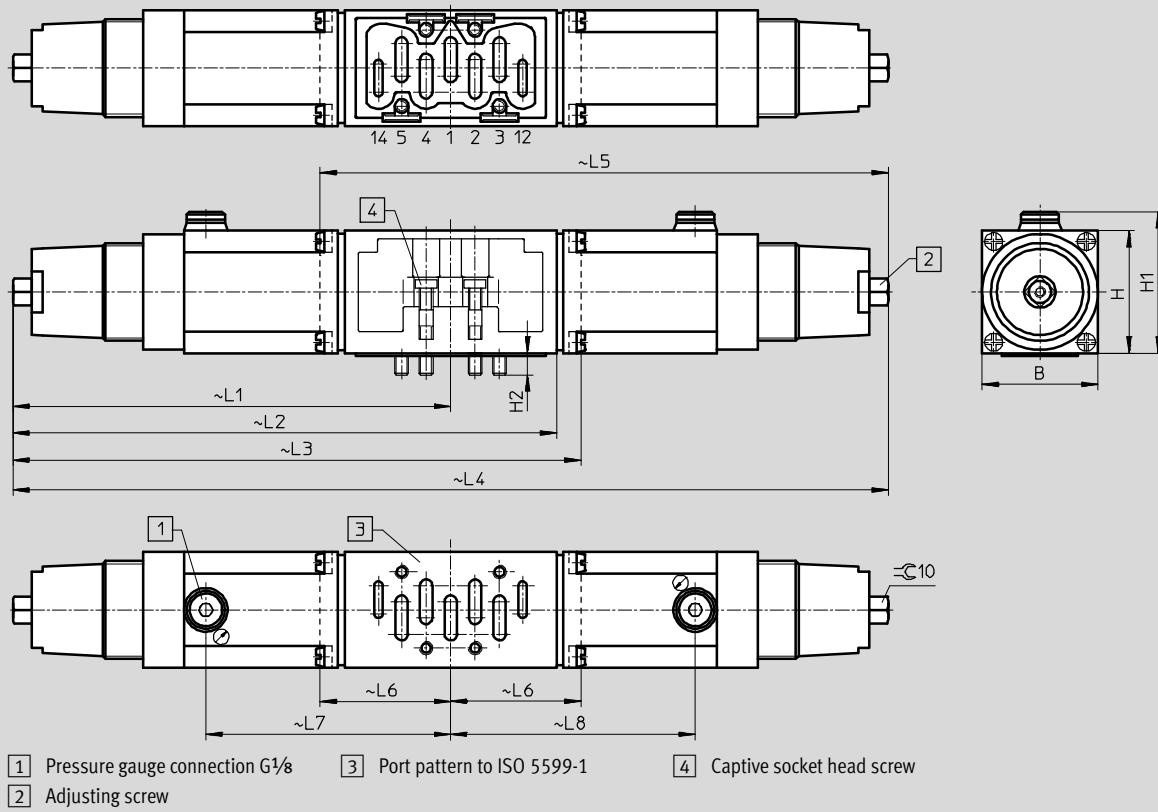

| Type | | B | H | H1 | H2 | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 |
|---------------|------|----|----|----|----|-------|-----|-----|-----|-----|------|-----|-----|
| LR-ZP-A-D-3 | [mm] | 70 | 63 | 65 | 14 | 201.5 | – | 274 | – | – | – | 119 | – |
| LR-ZP-B-D-3 | [mm] | 70 | 63 | 65 | 14 | 201.5 | – | – | – | 274 | 72.5 | – | 119 |
| LR-ZP-A/B-D-3 | [mm] | 70 | 63 | 65 | 14 | 201.5 | – | – | 403 | – | – | 119 | 119 |
| LR-ZP-P-D-3 | [mm] | 70 | 63 | 65 | 14 | 201.5 | 260 | – | – | – | – | 119 | – |

Flow control plate



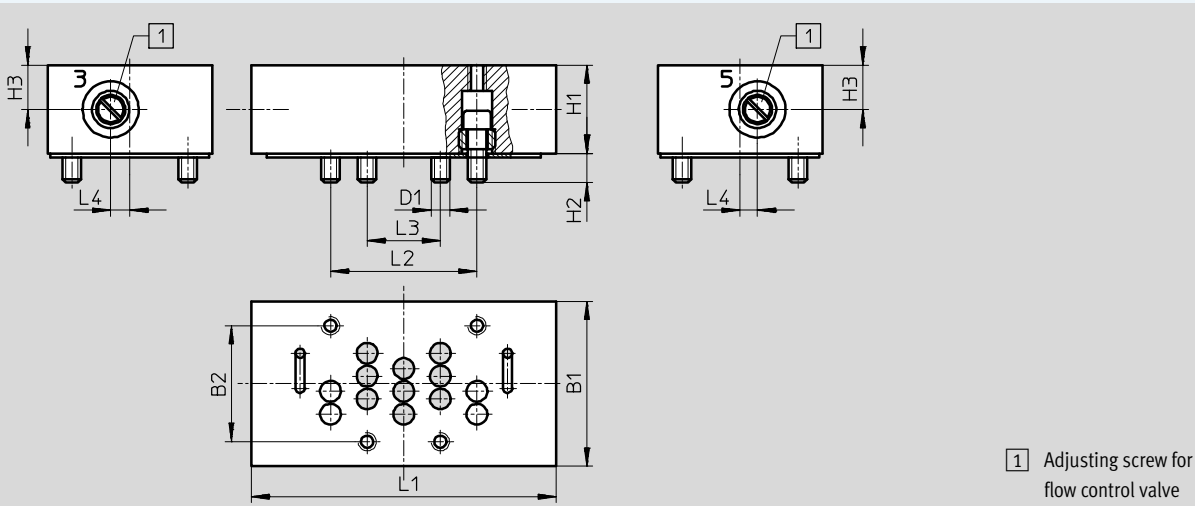


| Type | | B1 | B2 | D1 | H1 | H2 | H3 | L1 | L2 | L3 | L4 |
|----------------|------|----|----|----|----|----|------|-----|----|----|----|
| GRO-ZP-3-ISO-B | [mm] | 70 | 48 | M8 | 33 | 12 | 16.5 | 132 | 64 | 32 | 7 |

Valve terminal VTSA/VTSA-F

Ordering data – Individual valve 24 V DC, width 65 mm









FESTO

| Ordering data | | | | |
|--|------|---|----------|------------------|
| Name | Code | Description | Part No. | Type |
| Set, comprising pneumatic valve and intermediate solenoid plate | | | | |
| Pneumatic valve (can be ordered individually) | | | | |
|  | – | 5/2-way valve, single solenoid, mechanical spring return | 151863 | VL-5/2-D-3-FR-C |
| | – | 5/2-way valve, single solenoid, pneumatic spring return | 151864 | VL-5/2-D-3-C |
| | – | 5/2-way valve, double solenoid | 151865 | J-5/2-D-3-C |
| | – | 5/2-way valve, double solenoid, dominant signal | 151866 | JD-5/2-D-3-C |
| | – | 5/3-way valve, mid-position closed | 151867 | VL-5/3G-D-3-C |
| | – | 5/3-way valve, mid-position exhausted | 151868 | VL-5/3E-D-3-C |
| | – | 5/3-way valve, mid-position pressurised | 151869 | VL-5/3B-D-3-C |
| Intermediate solenoid plate for pneumatic valve (can be ordered individually) | | | | |
|  | – | For actuation of a single solenoid, pneumatically actuated directional control valve | 34934 | MUH-ZP-D-3-24G |
| | – | For actuation of a single solenoid, pneumatically actuated directional control valve, air spring supplied by external pilot air | 151715 | MUH-ZP-D-3-L-24G |
|  | – | For actuation of double solenoid, pneumatically actuated directional control valves or 5/3-way valves | 34935 | MUHX2-ZP-D-3-24G |

Valve terminal VTSA/VTSA-F

FESTO

Accessories – Adaptation to width 65 mm





| Ordering data | | | | |
|---|------------------|---|----------------|------------------------------|
| Name | Code | Description | Part No. | Type |
| Adapter plate | | | | |
|  | – | Adapter plate for adaptation of ISO size 3 components to valve terminal VTSA/VTSA-F (external pilot air) | 1302079 | VABA-S6-7-S2-3-P-G1 |
| | – | Adapter plate for adaptation of ISO size 3 components to valve terminal VTSA/VTSA-F (internal pilot air) | 1302090 | VABA-S6-7-S2-3-P-B-G1 |
| Blanking plate | | | | |
|  | L | Blanking plate for vacant position | 36121 | IAP-04-D-3 |
| Manifold sub-base, port pattern to ISO 5599-2 | | | | |
|  | M ¹⁾ | 1 valve position, 2 addresses, for double solenoid valves (with QS 16) | 18841 | VIGI-04-D-3 |
| | MK ¹⁾ | 1 valve position, 2 addresses, for double solenoid valves (with QS 12) | | |
| | N ¹⁾ | 1 valve position, 1 address, for single solenoid valves (with QS 16) | 18835 | VIGM-04-D-3 |
| | NK ¹⁾ | 1 valve position, 1 address, for single solenoid valves (with QS 12) | | |
| Right-hand end plate | | | | |
|  | – | With supply air/exhaust air, internal/external pilot air supply (internal/external pilot air is regulated via MUH plate (solenoid valve)) | 18880 | IEPR-04-D-3 |
| Flow control plate | | | | |
|  | X | Flow control plate (with two one-way flow control valves for exhaust air flow control) | 119674 | GRO-ZP-3-ISO-B |
| Intermediate pressure regulator plate | | | | |
|  | ZA | Port 1, 0.0 ... 12 bar | 35968 | LR-ZP-P-D-3 |
| | ZB | Port 4, 0.5 ... 12 bar | 35971 | LR-ZP-A-D-3 |
| | ZC | Port 2, 0.5 ... 12 bar | 35426 | LR-ZP-B-D-3 |
| | ZD | Port 2 and 4, 0.5 ... 12 bar | 35429 | LR-ZP-A/B-D-3 |
| Isolating disc | | | | |
|  | T ¹⁾ | Duct separation 1 | 18910 | NSC-04-D-3 |
| | R ¹⁾ | Duct separation 3, 5 | | |
| | S ¹⁾ | Duct separation 1, 3, 5 | | |
| Pressure gauge | | | | |
|  | T | For regulator, max. 10 bar | 162835 | MA-40-10-1/8-EN |
| | – | For regulator, max. 16 bar | 529046 | MA-40-16-1/8-EN-DPA |


1) Code letter within the order code for a valve terminal configuration.

Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

FESTO

-  - Valve width to ISO 15407-2
 - 18 mm
 - 26 mm
-  - Valve width to ISO 5599-2
 - 42 mm (ISO 1)
 - 52 mm (ISO 2)
-  - Voltage
 - 24 V DC
 - 110 V AC
-  - Flow rate
 - Width 18 mm: up to 600 l/min
 - Width 26 mm: up to 1200 l/min
 - Width 42 mm: up to 1500 l/min
 - Width 52 mm: up to 3400 l/min

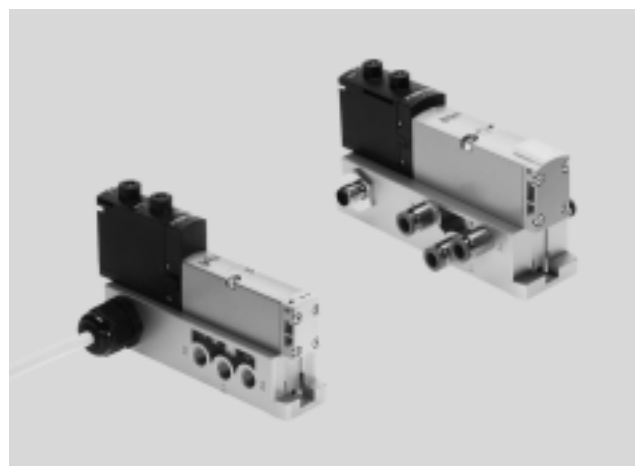

| General technical data | | | | |
|---|---|-------|-------|-------|
| Design | Piston spool valve | | | |
| Sealing principle | Soft | | | |
| Actuation type | Electric | | | |
| Type of control | Piloted | | | |
| Exhaust function, with flow control | Via individual sub-base | | | |
| Lubrication | Life-time lubrication | | | |
| Type of mounting | <ul style="list-style-type: none"> • Valve: Screwed onto sub-base • Individual sub-base: Screwed via through-hole | | | |
| Mounting position | Any | | | |
| Manual override | Detenting, non-detenting, covered | | | |
| Pneumatic connections – Threaded connection | | | | |
| Width | 18 mm | 26 mm | 42 mm | 52 mm |
| Pneumatic connection | Via sub-base | | | |
| Supply port | 1 | G1/8 | G3/8 | G1/2 |
| Exhaust port | 3/5 | G1/8 | G3/8 | G1/2 |
| Working ports | 2/4 | G1/8 | G3/8 | G1/2 |
| External pilot air supply port | 14 | M5 | G1/8 | G1/8 |
| Pilot exhaust air port | 12 | M5 | G1/8 | G1/8 |

| Operating and environmental conditions, individual sub-base | |
|---|--|
| Operating medium | Compressed air to ISO 8573-1:2010 [7:4:4] |
| Notes about the operating/pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Operating pressure [bar] | -0.9 ... +10 |
| Ambient temperature [°C] | -5 ... +50 |
| Certification | c UL us - Recognized (OL) |
| CE marking (see declaration of conformity) | In accordance with EU Low Voltage Directive (not for variants with round plug M12, VABS-S4...R3 and variants BB 52, VABS-S2-2S...) |
| Protection class | IP65, NEMA 4 (for all types of signal transmission in assembled state) |

Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

| Standard nominal flow rate of valve/individual sub-base [l/min], 24 V DC, 110 V AC | | | | |
|---|--|--|---|---|
| Valve function (with valve code) | Width 18 mm | | Width 26 mm | |
| | Valve | Valve on individual sub-base | Valve | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | 750 | 600 | 1400 | 1200 |
| 5/2-way, double solenoid with dominant signal (D52) | 750 | 600 | 1400 | 1200 |
| 5/2-way, single solenoid, pneum. spring (M52-A) | 750 | 600 | 1400 | 1200 |
| 5/2-way single solenoid, mech. spring (M52-M) | 750 | 600 | 1400 | 1200 |
| 5/3-way, closed (P53C) | 700 | 550 | 1400 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted (P53E) | 700 ¹⁾ 330 ²⁾ | 500 ¹⁾ 330 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, pressurised (P53U) | 700 ¹⁾ 330 ²⁾ | 500 ¹⁾ 330 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted, switching position 14 detenting (P53ED) ³⁾ | – | 390 ¹⁾ 390 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, exhausted, switching position 12 detenting (P53EP) ³⁾ | – | 390 ¹⁾ 320 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 1200 ¹⁾ 700 ²⁾ |
| 5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD) ³⁾ | – | 380 ¹⁾ 360 ²⁾ | 700 ¹⁾ 700 ²⁾ | 700 ¹⁾ 700 ²⁾ |
| 5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD) ³⁾ | – | 400 | – | 900 ¹⁾ 840 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | 600 | 500 | 1250 | 1100 |
| 2x3/2-way, single solenoid, open (T32U) | 600 | 500 | 1250 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32H) | 600 | 500 | 1250 | 1100 |
| 2x3/2-way, single solenoid, closed (T32N) | 600 | 500 | 1250 | 1100 |
| 2x3/2-way, single solenoid, open (T32F) | 600 | 500 | 1250 | 1100 |
| 2x3/2-way, single solenoid, open/closed (T32W) | 600 | 500 | 1250 | 1100 |
| 2x2/2-way, single solenoid, closed (T22C) | 700 | 500 | 1350 | 1100 |
| 2x2/2-way, single solenoid, closed (T22CV) | 700 | 500 | 1350 | 1100 |

1) Switching position

2) Mid-position

3) The valve functions P53AD, P53BD, P53ED and P53EP are only available in the 24 V DC version. Values only apply to 24 V DC.

Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

| Standard nominal flow rate of valve/individual sub-base [l/min], 24 V DC, 110 V AC | | | | |
|--|---|---|--|--|
| Valve function (with valve code) | Width 42 mm | | Width 52 mm | |
| | Valve | Valve on individual sub-base | Valve | Valve on individual sub-base |
| 5/2-way, double solenoid (B52) | 2000 | 1500 | 4000 | 3400 |
| 5/2-way, double solenoid with dominant signal (D52) | 2000 | 1500 | 4000 | 3400 |
| 5/2-way, single solenoid, pneum. spring (M52-A) | 2000 | 1500 | 4000 | 3400 |
| 5/2-way single solenoid, mech. spring (M52-M) | 2000 | 1500 | 4000 | 3400 |
| 5/3-way, closed (P53C) | 1900 ¹⁾ 950 ²⁾ | 1400 ¹⁾ 800 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, exhausted (P53E) | 1900 ¹⁾ 950 ²⁾ | 1400 ¹⁾ 800 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised (P53U) | 1900 ¹⁾ 950 ²⁾ | 1400 ¹⁾ 800 ²⁾ | 3600 ¹⁾ 1700 ²⁾ | 3200 ¹⁾ 1700 ²⁾ |
| 5/3-way, pressurised 1 to 2, 4 to 5 closed (P53F) ³⁾ | 1700 ¹⁾ 700 ²⁾ | 1400 ¹⁾ 700 ²⁾ | 3000 ¹⁾ 900 ²⁾ | 2600 ¹⁾ 900 ²⁾ |
| 2x3/2-way, single solenoid, closed (T32C) | 1600 | 1200 | 3000 | 2600 |
| 2x3/2-way, single solenoid, open (T32U) | 1600 | 1200 | 3000 | 2600 |
| 2x3/2-way, single solenoid, open/closed (T32H) | 1600 | 1200 | 3000 | 2600 |
| 2x3/2-way, single solenoid, closed (T32N) | 1600 | 1200 | 3000 | 2600 |
| 2x3/2-way, single solenoid, open (T32F) | 1600 | 1200 | 3000 | 2600 |
| 2x3/2-way, single solenoid, open/closed (T32W) | 1600 | 1200 | 3000 | 2600 |
| 2x2/2-way, single solenoid, closed (T22C) | 1600 | 1400 | 4000 | 3400 |
| 2x2/2-way, single solenoid, closed (T22CV) | 1600 | 1400 | – | – |

1) Switching position

2) Mid-position

3) The valve function P53F is only available in the 24 V DC version. Values only apply to 24 V DC.

| Electrical data, individual sub-base | | |
|--------------------------------------|------------------|--|
| Acceptable current load at 40 °C | [A] | 2 (1 A per coil) |
| Protection class to EN 60529 | | IP65, NEMA 4 (for all types of signal transmission in assembled state) |
| Variants with round plug M12 | | |
| Operating voltage range | [V DC] | 24 ±10% (with variants with round plug M12 VABS-...-R3) |
| Surge resistance | [kV] | 0.8 |
| Degree of contamination | | 3 |
| Duty cycle | ED | 100% |
| Variants with cable connector | | |
| Operating voltage range | [V DC] [AC V] | 24 ±10% (for variants with cable terminal VABS-...-K1/C1, ...-K2) 110 ±10% (50 ... 60 Hz) (for variants with cable and spring-loaded terminal VABS-...-K1/C1, ...-K2) |
| Surge resistance | [kV] | 4 |
| Degree of contamination | | 3 |
| Duty cycle | [ED] | 100% |

 Note

A cable connector is needed to ensure the IP protection class and to protect against tensile load, twisting and bending.

Valve terminal VTSA/VTSA-F

FESTO

Technical data – Valves on individual sub-base

| Materials | | | | |
|-------------------|---|-------|-------|----------------------------|
| Width | 18 mm | 26 mm | 42 mm | 52 mm |
| Connecting plate | Die-cast aluminium | | | Gravity die-cast aluminium |
| Valve | Die-cast aluminium, reinforced polyamide | | | |
| Seals | Nitrile rubber, elastomer (support made of steel) | | | |
| Note on materials | RoHS-compliant | | | |

| Product weight [g] | | | | |
|---|-------|-------|-------|-------|
| Width | 18 mm | 26 mm | 42 mm | 52 mm |
| Valves | | | | |
| 5/2-way valve, 5/2-way, double solenoid (B52, D52) | 172 | 276 | 439 | 732 |
| 5/2-way solenoid valve, single solenoid (M52-AZD, M52-MZD) | 163 | 293 | 426 | 702 |
| 5/3-way solenoid valve (P53C, P53E, P53U) | 191 | 320 | 456 | 780 |
| 5/3-way solenoid valve (P53BD) | 172 | – | – | – |
| 5/3-way solenoid valve (P53ED, P53EP) | – | 291 | – | – |
| 5/3-way solenoid valve (P53AD) | – | 301 | – | – |
| 5/3-way solenoid valve (P53F) | – | – | 456 | 780 |
| 2x 3/2-way solenoid valve (T32C, T32U, T32H, T32N, T32F, T32W) | 190 | 335 | 442 | 740 |
| 2x 2/2-way solenoid valve (T22C, T22CV) | 190 | 335 | 442 | 740 |
| Individual connection | | | | |
| Individual sub-base | 192 | 302 | 386 | 815 |


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with M12 plug, width 18 mm

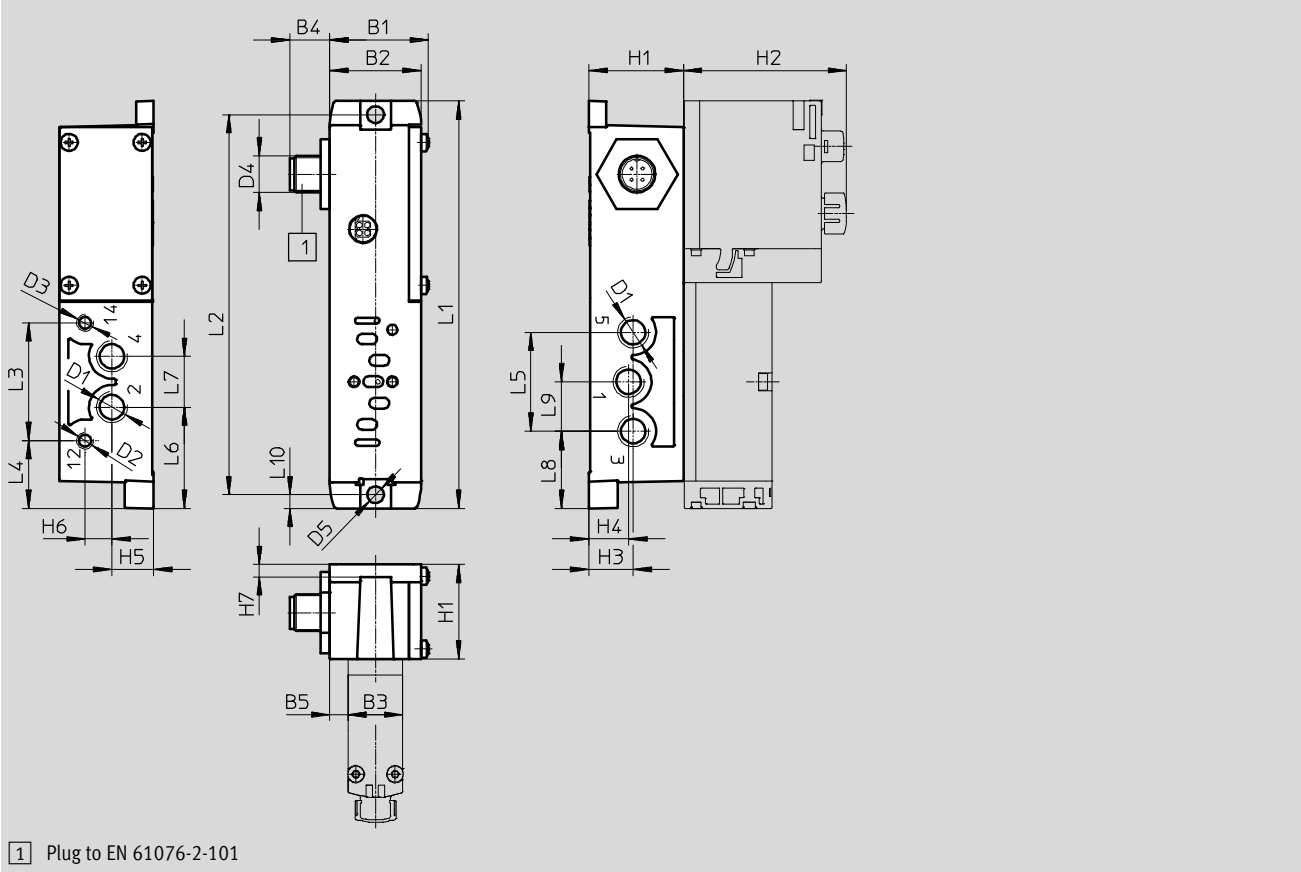

| Type | B1 | B2 | B3 | B4 | B5 | D1 | D2 | D3 | D4 | D5Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|-----------------------------------|------|----|----|----|----|-------------------------------|----|----|-------|-----|----|------|------|----|------|-----|----|
| VABS-S4-2S-G18-R3 ¹⁾ | 32.4 | 30 | 18 | 13 | 6 | G ¹ / ₈ | M5 | M5 | M12x1 | 5.5 | 31 | 53.4 | 14.5 | 13 | 13.7 | 8.8 | 4 |
| VABS-S4-2S-G18-B-R3 ²⁾ | | | | | | | | - | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|------|------|------|------|------|-----|
| VABS-S4-2S-G18-R3 ¹⁾ | 133.5 | 124.5 | 38.6 | 22.2 | 32.4 | 33.2 | 16.6 | 25.3 | 16.2 | 4.5 |
| VABS-S4-2S-G18-B-R3 ²⁾ | | | | | | | | | | |

1) External pilot air supply

2) Internal pilot air supply

– Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with cable terminals, width 18 mm

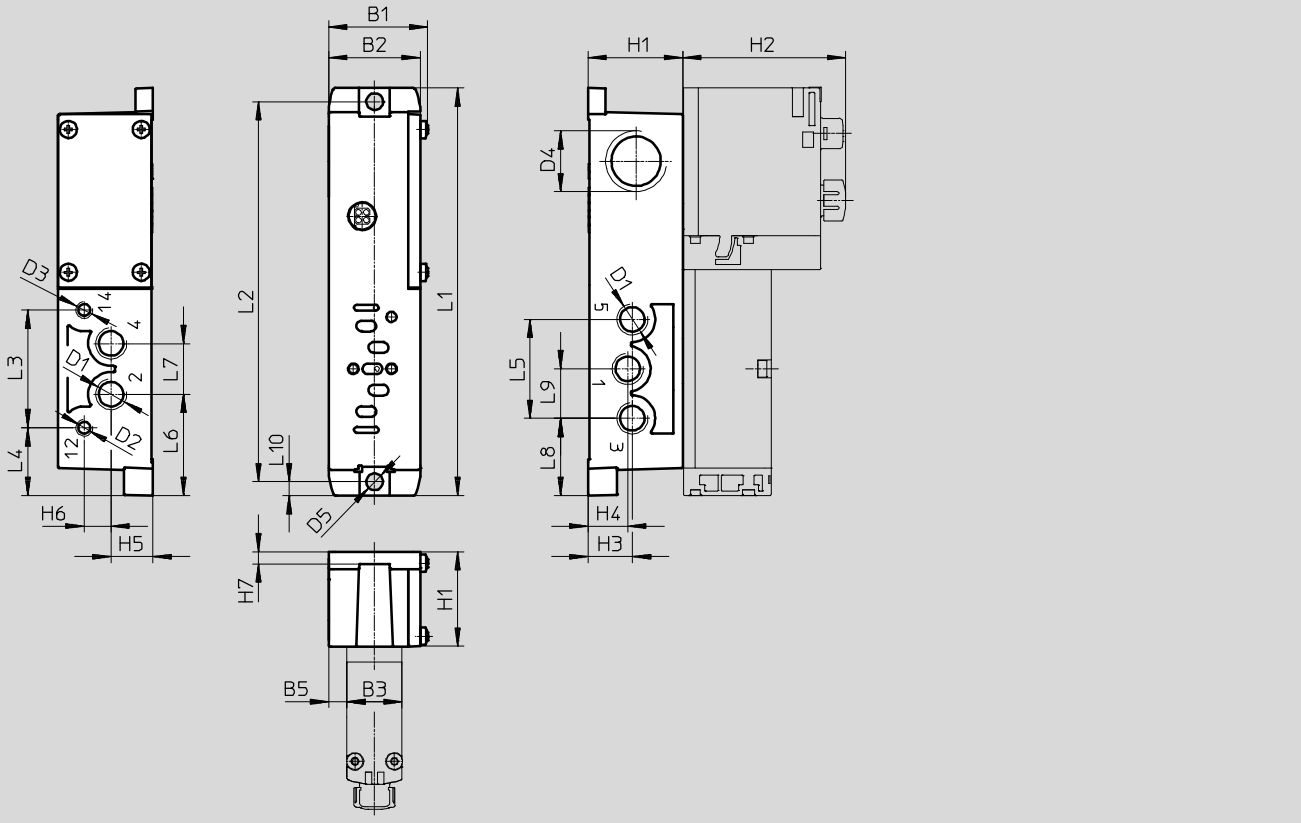

| Type | B1 | B2 | B3 | B5 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|-----------------------------------|------|----|----|----|------|----|----|---------|------|----|------|------|----|------|-----|----|
| VABS-S4-2S-G18-K2 ¹⁾ | 32.4 | 30 | 18 | 6 | G1/8 | M5 | M5 | M20x1.5 | 5.5 | 31 | 53.4 | 14.5 | 13 | 13.7 | 8.8 | 4 |
| VABS-S4-2S-G18-B-K2 ²⁾ | | | | | | | - | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|------|------|------|------|------|-----|
| VABS-S4-2S-G18-K2 ¹⁾ | 133.5 | 124.5 | 38.6 | 22.2 | 32.4 | 33.2 | 16.6 | 25.3 | 16.2 | 4.5 |
| VABS-S4-2S-G18-B-K2 ²⁾ | | | | | | | | | | |

- 1) External pilot air supply
- 2) Internal pilot air supply

• † - Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with M12 plug, width 26 mm

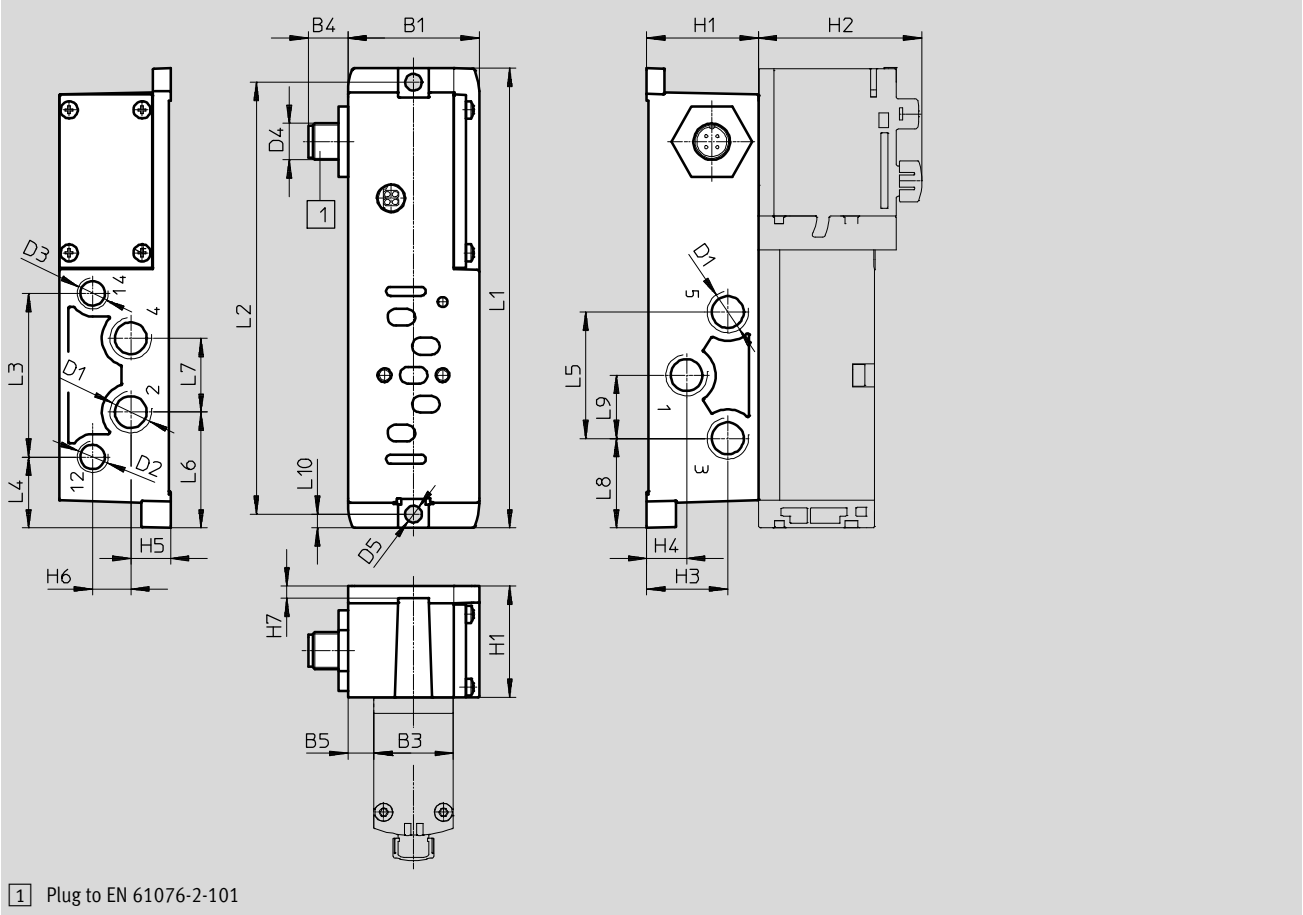

| Type | B1 | B3 | B4 | B5 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|-----------------------------------|----|----|----|-----|------|------|------|-------|------|------|------|------|----|----|------|----|
| VABS-S4-1S-G14-R3 ¹⁾ | 43 | 26 | 13 | 8.5 | G1/4 | G1/8 | G1/8 | M12x1 | 5.5 | 36.5 | 53.5 | 26.5 | 13 | 13 | 12.5 | 4 |
| VABS-S4-1S-G14-B-R3 ²⁾ | | | | | | | - | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|------|------|------|------|------|-----|
| VABS-S4-1S-G14-R3 ¹⁾ | 150.6 | 141.5 | 53.6 | 23.2 | 41.4 | 37.9 | 24.2 | 29.3 | 20.7 | 4.5 |
| VABS-S4-1S-G14-B-R3 ²⁾ | | | | | | | | | | |

- 1) External pilot air supply
- 2) Internal pilot air supply

• Note: This product conforms to ISO 1179-1 and to ISO 228-1

Valve terminal VTSA/VTSA-F


Technical data – Valves on individual sub-base

FESTO

Dimensions

Download CAD data → www.festo.com

Individual sub-base with cable terminals, width 26 mm

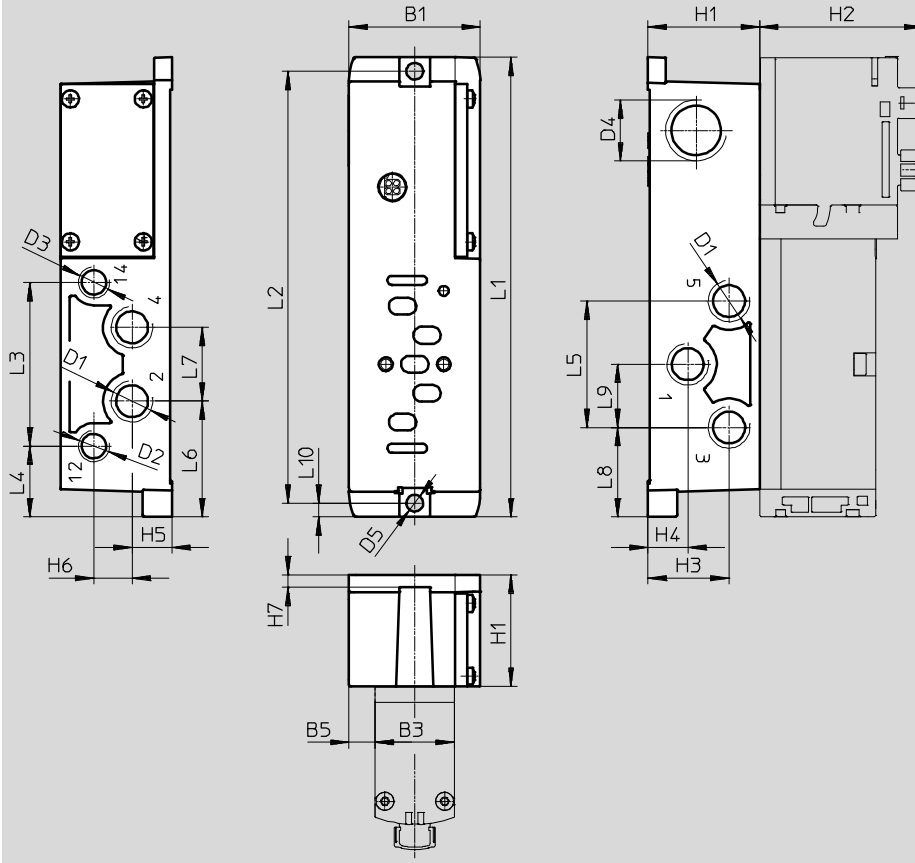

| Type | B1 | B3 | B5 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 |
|-----------------------------------|----|----|-----|-----------------|-----------------|-----------------|---------|------|------|------|------|----|----|------|----|
| VABS-S4-1S-G14-K2 ¹⁾ | 43 | 26 | 8.5 | G $\frac{1}{4}$ | G $\frac{1}{8}$ | G $\frac{1}{8}$ | M20x1.5 | 5.5 | 36.5 | 53.5 | 26.5 | 13 | 13 | 12.5 | 4 |
| VABS-S4-1S-G14-B-K2 ²⁾ | | | | | | - | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|------|------|------|------|------|-----|
| VABS-S4-1S-G14-K2 ¹⁾ | 150.6 | 141.5 | 53.6 | 23.2 | 41.4 | 37.9 | 24.2 | 29.3 | 20.7 | 4.5 |
| VABS-S4-1S-G14-B-K2 ²⁾ | | | | | | | | | | |

1) External pilot air supply

2) Internal pilot air supply

• Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with M12 plug, width 42 mm

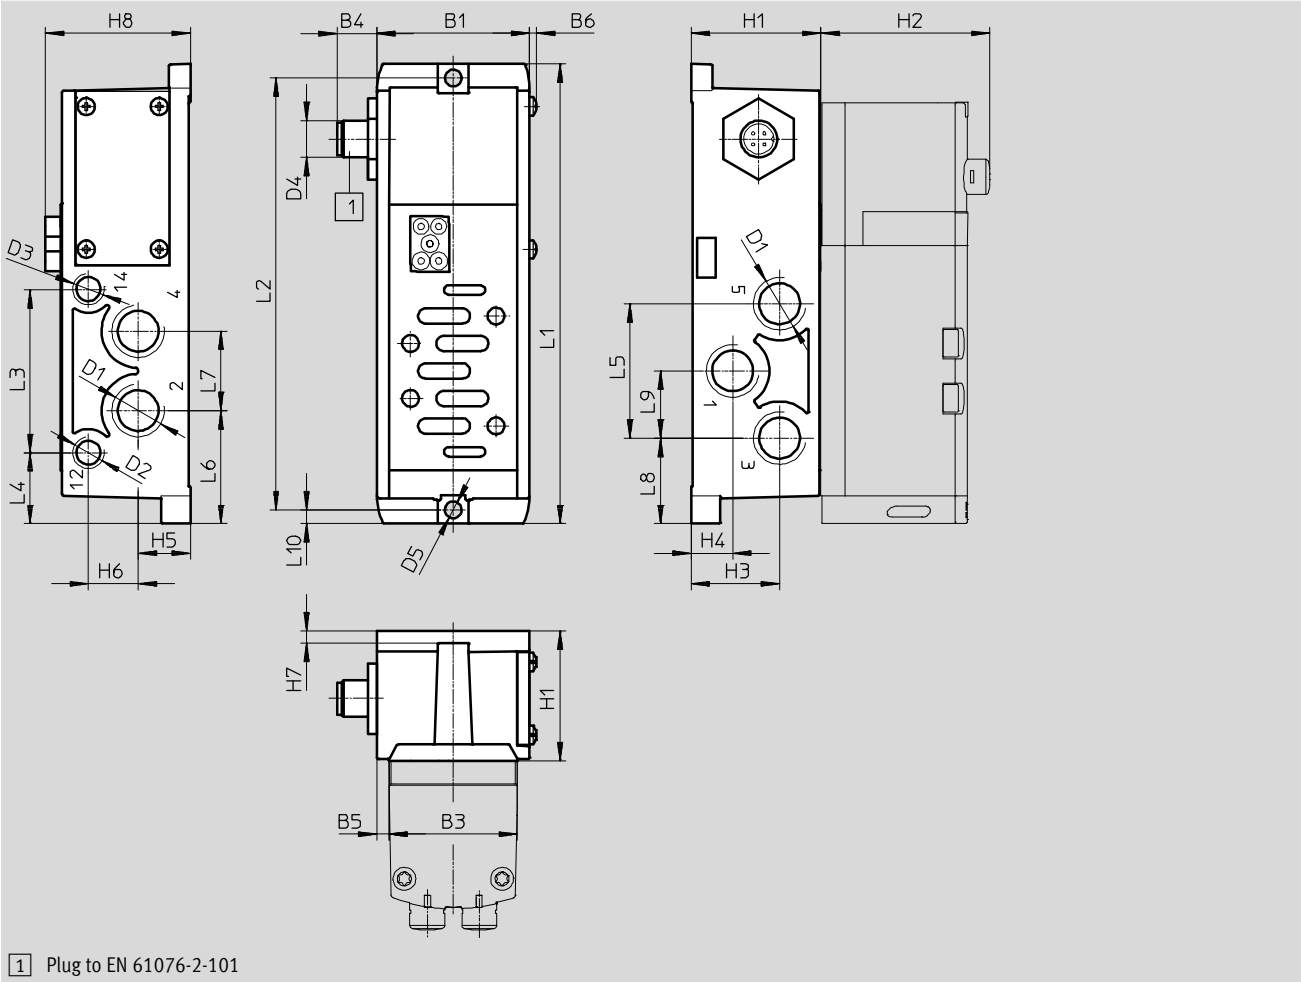

| Type | B1 | B3 | B4 | B5 | B6 | D1 | D2 | D3 | D4 | D5Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 |
|-----------------------------------|----|----|----|----|-----|-------------------------------|-------------------------------|-------------------------------|---------|-----|------|------|----|------|------|------|----|------|
| VABS-S2-1S-G38-R3 ¹⁾ | 50 | 42 | 13 | 4 | 2.2 | G ³ / ₈ | G ¹ / ₈ | G ¹ / ₈ | M20x1.5 | 5.5 | 42.5 | 55.3 | 29 | 13.6 | 17.1 | 16.3 | 4 | 47.5 |
| VABS-S2-1S-G38-B-R3 ²⁾ | | | | | | | | - | | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|----|----|----|----|----|-----|
| VABS-S2-1S-G38-R3 ¹⁾ | 150.6 | 141.5 | 53.6 | 23.2 | 44 | 37 | 26 | 28 | 22 | 4.5 |
| VABS-S2-1S-G38-B-R3 ²⁾ | | | | | | | | | | |

- 1) External pilot air supply
- 2) Internal pilot air supply

-||- Note: This product conforms to ISO 1179-1 and to ISO 228-1


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with spring-loaded terminal or for self-assembly, width 42 mm

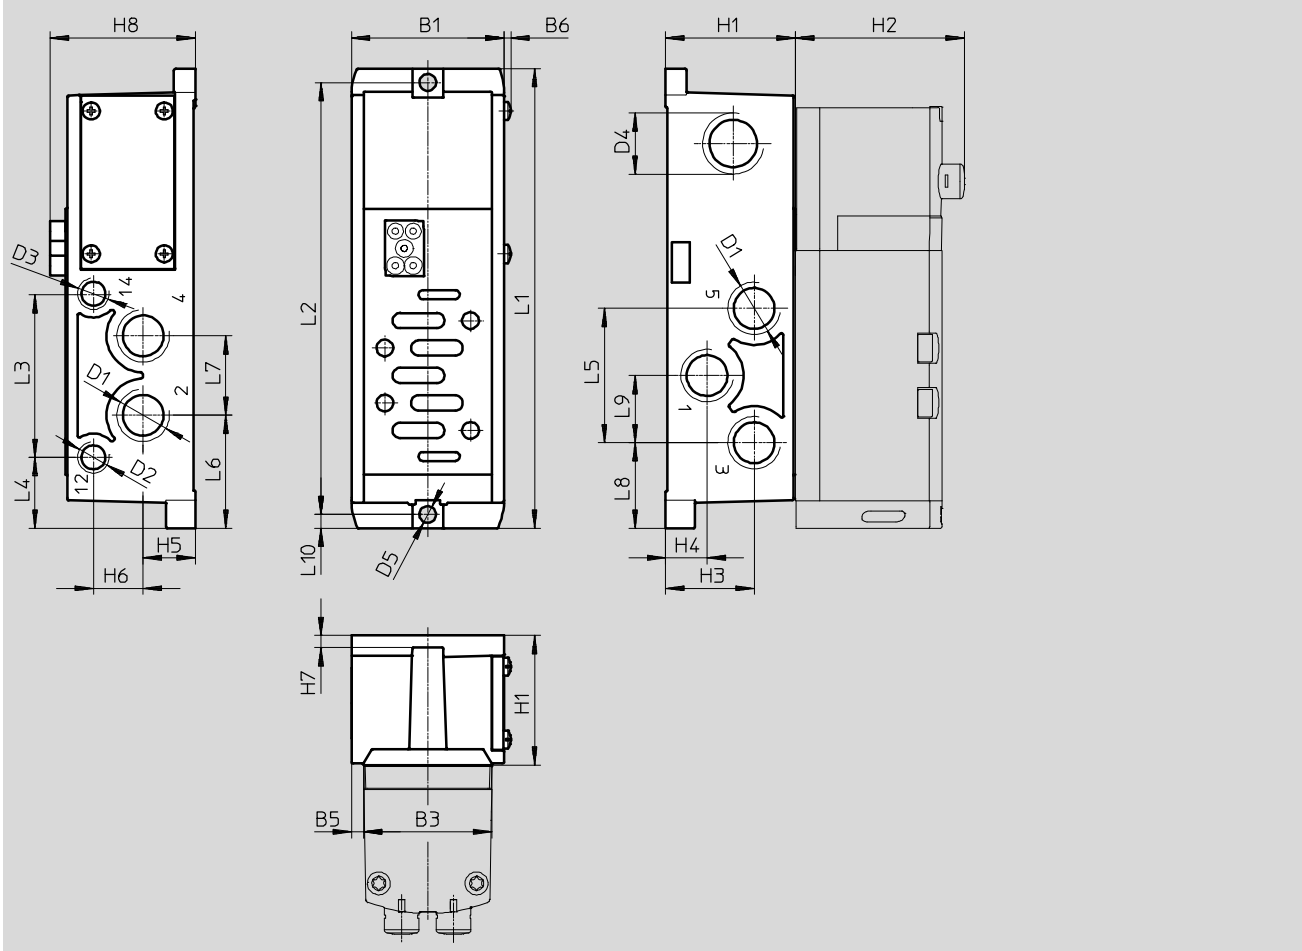

| Type | B1 | B3 | B5 | B6 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 |
|-----------------------------------|----|----|----|-----|-------------------------------|-------------------------------|-------------------------------|---------|------|------|------|----|------|------|------|----|------|
| VABS-S2-1S-G38-K1 ¹⁾ | 50 | 42 | 4 | 2.2 | G ³ / ₈ | G ¹ / ₈ | G ¹ / ₈ | M20x1.5 | 5.5 | 42.5 | 55.3 | 29 | 13.6 | 17.1 | 16.3 | 4 | 47.5 |
| VABS-S2-1S-G38-C1 ¹⁾ | | | | | | | | | | | | | | | | | |
| VABS-S2-1S-G38-B-K1 ²⁾ | | | | | | | - | | | | | | | | | | |
| VABS-S2-1S-G38-B-C1 ²⁾ | | | | | | | | | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-------|-------|------|------|----|----|----|----|----|-----|
| VABS-S2-1S-G38-K1 ¹⁾ | 150.6 | 141.5 | 53.6 | 23.2 | 44 | 37 | 26 | 28 | 22 | 4.5 |
| VABS-S2-1S-G38-C1 ¹⁾ | | | | | | | | | | |
| VABS-S2-1S-G38-B-K1 ²⁾ | | | | | | | | | | |
| VABS-S2-1S-G38-B-C1 ²⁾ | | | | | | | | | | |

1) External pilot air supply

2) Internal pilot air supply

-||- Note: This product conforms to ISO 1179-1 and to ISO 228-1

-||- Note

Electrical connection

- VABS-...-K1: open end
- VABS-...-C1: spring-loaded terminal


Valve terminal VTSA/VTSA-F

Technical data – Valves on individual sub-base

Dimensions

Download CAD data → www.festo.com

Individual sub-base with M12 plug, width 52 mm

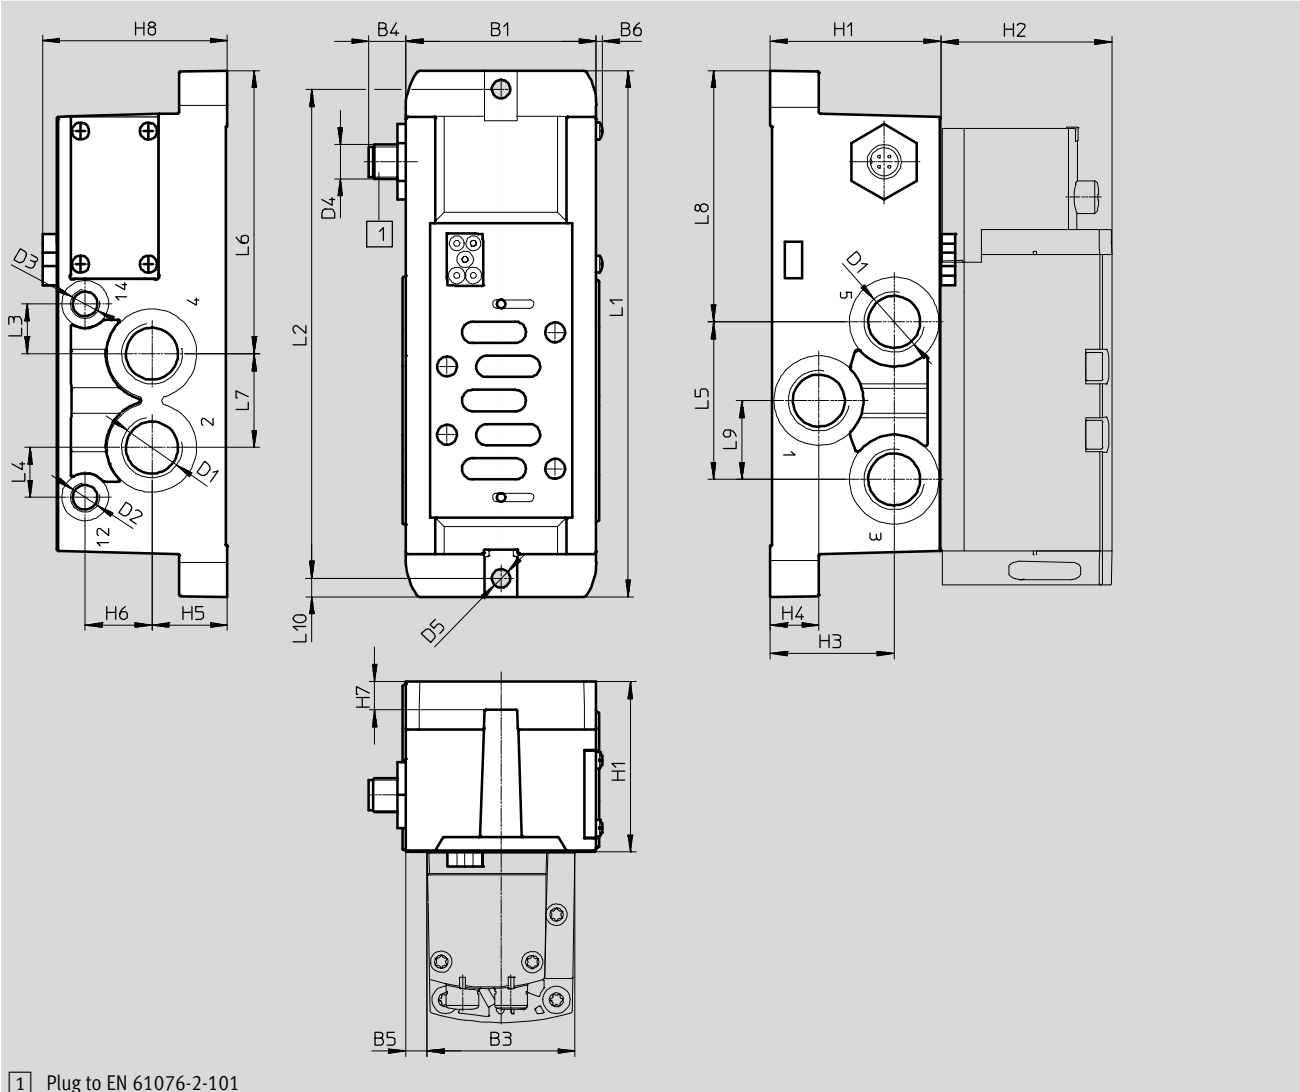

| Type | B1 | B3 | B4 | B5 | B6 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 |
|-----------------------------------|----|----|----|-----|-----|------|------|------|-------|------|----|----|------|----|------|------|----|----|
| VABS-S2-2S-G12-R3 ¹⁾ | 67 | 52 | 13 | 7.5 | 2.2 | G1/2 | G1/8 | G1/8 | M12x1 | 6.5 | 60 | 60 | 43.5 | 17 | 26.5 | 23.5 | 10 | 65 |
| VABS-S2-2S-G12-B-R3 ²⁾ | | | | | | | | - | | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-----|-----|------|------|------|------|----|------|------|-----|
| VABS-S2-2S-G12-R3 ¹⁾ | 185 | 172 | 17.5 | 17.5 | 55.4 | 99.5 | 33 | 88.3 | 27.7 | 6.5 |
| VABS-S2-2S-G12-B-R3 ²⁾ | | | | | | | | | | |

- 1) External pilot air supply
- 2) Internal pilot air supply

-||- Note: This product conforms to ISO 1179-1 and to ISO 228-1

Valve terminal VTSA/VTSA-F


Technical data – Valves on individual sub-base

FESTO

Dimensions

Download CAD data → www.festo.com

Individual sub-base with spring-loaded terminal or for self-assembly, width 52 mm

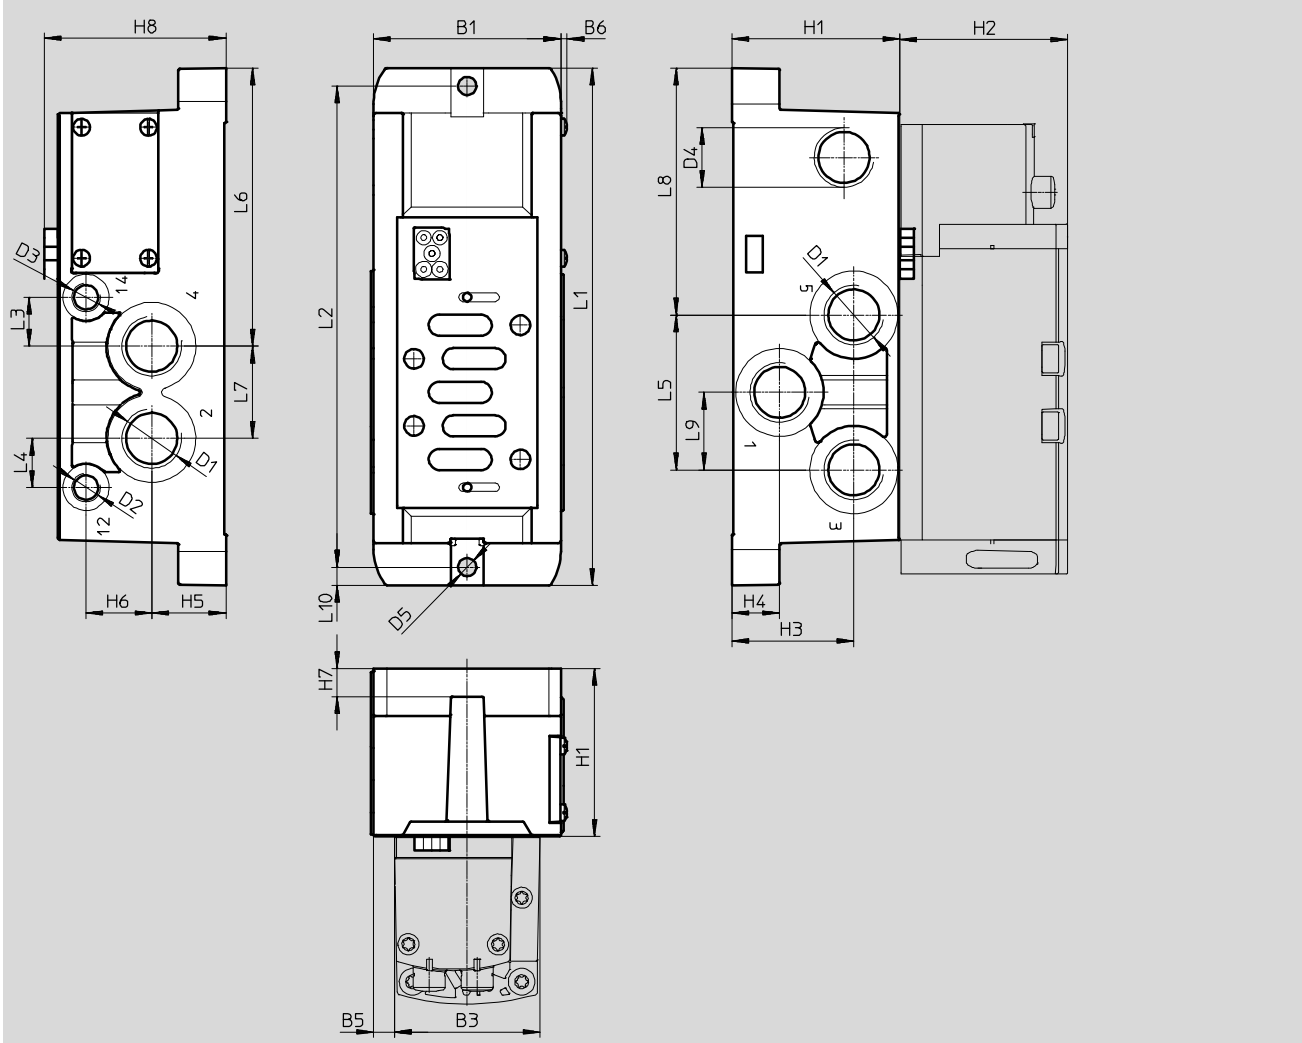


| Type | B1 | B3 | B5 | B6 | D1 | D2 | D3 | D4 | D5 Ø | H1 | H2 | H3 | H4 | H5 | H6 | H7 | H8 |
|-----------------------------------|----|----|-----|-----|------|------|------|---------|------|----|----|------|----|------|------|----|----|
| VABS-S2-2S-G12-K1 ¹⁾ | 67 | 52 | 7.5 | 2.2 | G1/2 | G1/8 | G1/8 | M20x1.5 | 6.5 | 60 | 60 | 43.5 | 17 | 26.5 | 23.5 | 10 | 65 |
| VABS-S2-2S-G12-C1 ¹⁾ | | | | | | | | | | | | | | | | | |
| VABS-S2-2S-G12-B-K1 ²⁾ | | | | | | | - | | | | | | | | | | |
| VABS-S2-2S-G12-B-C1 ²⁾ | | | | | | | | | | | | | | | | | |

| Type | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 |
|-----------------------------------|-----|-----|------|------|------|------|----|------|------|-----|
| VABS-S2-2S-G12-K1 ¹⁾ | 185 | 172 | 17.5 | 17.5 | 55.4 | 99.5 | 33 | 88.3 | 27.7 | 6.5 |
| VABS-S2-2S-G12-C1 ¹⁾ | | | | | | | | | | |
| VABS-S2-2S-G12-B-K1 ²⁾ | | | | | | | | | | |
| VABS-S2-2S-G12-B-C1 ²⁾ | | | | | | | | | | |

- 1) External pilot air supply
2) Internal pilot air supply

• Note: This product conforms to ISO 1179-1 and to ISO 228-1

-  - Note





Electrical connection

- VABS-...-K1: open end
- VABS-...-C1: spring-loaded terminal

Valve terminal VTSA/VTSA-F






Accessories – Individual connection

FESTO

| Ordering data | | | | | | |
|---|--|--|-----------------------------|----------------|---------------------------------|--------------------------|
| | Description | | Width | Part No. | Type | |
| Individual sub-base, electrical connection with plug connector M12 (without CE marking) | | | | | | |
|  | Threaded connection, internal pilot air supply | Connections G $\frac{1}{8}$ | 18 mm | 541070 | VABS-S4-2S-G18-B-R3 | |
| | | | | 8033156 | VABS-S4-2S-G18-B-R3-EX1E | |
| | | Connections G $\frac{1}{4}$ | 26 mm | 541069 | VABS-S4-1S-G14-B-R3 | |
| | | | | 8033158 | VABS-S4-1S-G14-B-R3-EX1E | |
| | | Connections G $\frac{3}{8}$ | 42 mm | 546104 | VABS-S2-1S-G38-B-R3 | |
| | | | | 8033160 | VABS-S2-1S-G38-B-R3-EX1E | |
| | | Threaded connection, external pilot air supply | Connections G $\frac{1}{8}$ | 18 mm | 541064 | VABS-S4-2S-G18-R3 |
| | | | | 8033155 | VABS-S4-2S-G18-R3-EX1E | |
| | Connections G $\frac{1}{4}$ | | 26 mm | 541063 | VABS-S4-1S-G14-R3 | |
| | | | | 8033157 | VABS-S4-1S-G14-R3-EX1E | |
| | Connections G $\frac{3}{8}$ | | 42 mm | 546101 | VABS-S2-1S-G38-R3 | |
| | | | | 8033159 | VABS-S2-1S-G38-R3-EX1E | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555645 | VABS-S2-2S-G12-B-R3 | |
| | | | | 8033162 | VABS-S2-2S-G12-B-R3-EX1E | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555640 | VABS-S2-2S-G12-R3 | |
| | | | | 8033161 | VABS-S2-2S-G12-R3-EX1E | |
| Individual sub-base, electrical connection via cable terminals | | | | | | |
|  | Threaded connection, internal pilot air supply | Connections G $\frac{1}{8}$ | 18 mm | 541067 | VABS-S4-2S-G18-B-K2 | |
| | | Connections G $\frac{1}{4}$ | 26 mm | 541065 | VABS-S4-1S-G14-B-K2 | |
| | Threaded connection, external pilot air supply | Connections G $\frac{1}{8}$ | 18 mm | 539723 | VABS-S4-2S-G18-K2 | |
| | | Connections G $\frac{1}{4}$ | 26 mm | 539725 | VABS-S4-1S-G14-K2 | |
| Individual sub-base, electrical connection via spring-loaded terminal | | | | | | |
|  | Threaded connection, internal pilot air supply | Connections G $\frac{3}{8}$ | 42 mm | 546762 | VABS-S2-1S-G38-B-C1 | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555643 | VABS-S2-2S-G12-B-C1 | |
| | Threaded connection, external pilot air supply | Connections G $\frac{3}{8}$ | 42 mm | 546760 | VABS-S2-1S-G38-C1 | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555638 | VABS-S2-2S-G12-C1 | |
| Individual sub-base, electrical connection via cable (open end) | | | | | | |
|  | Threaded connection, internal pilot air supply | Connections G $\frac{3}{8}$ | 42 mm | 546102 | VABS-S2-1S-G38-B-K1 | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555641 | VABS-S2-2S-G12-B-K1 | |
| | Threaded connection, external pilot air supply | Connections G $\frac{3}{8}$ | 42 mm | 546099 | VABS-S2-1S-G38-K1 | |
| | | Connections G $\frac{1}{2}$ | 52 mm | 555636 | VABS-S2-2S-G12-K1 | |

Valve terminal VTSA/VTSA-F






Accessories – Individual connection

| Ordering data | | | |
|--|---|----------|-----------------------------------|
| | Description | Part No. | Type |
| Plug socket for electrical connection of individual valves | | | |
|  | Angled socket, M12x1, 4-pin, type A, screw terminal | 185498 | SEA-M12-4WD-PG7 |
| Connecting cable for electrical connection of individual valves at the individual electrical connection, 6-way or 10-way | | | |
|  | <ul style="list-style-type: none"> Angled socket, M12x1, 4-pin Open end, 4-wire | 5 m | 164258 SIM-M12-4WD-5-PU |
|  | <ul style="list-style-type: none"> Straight socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541328 NEBU-M12G5-K-5-LE4 |
|  | <ul style="list-style-type: none"> Angled socket, M12x1, 5-pin Open end, 4-wire | 5 m | 541329 NEBU-M12W5-K-5-LE4 |
|  | Modular system for connecting cables | – | – NEBU-... → Internet: nebu |
| Pneumatic connection accessories | | | |
| <p>A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories → page 207 or on the Internet via the individual search terms:</p> <p>Internet → connection technology, silencer, blanking plug</p> | | | |

Valve terminal VTSA/VTSA-F

Accessories

FESTO

| Ordering data | | | | | | |
|---|-----------------------------------|--|-------------------------------|---|---|----|
| | Code | Description | Part No. | Type | PU ¹⁾ | |
| Multi-pin plug distributor | | | | | | |
|  | - | 15-pin Sub-D socket/8x 3-pin M8 plugs | 8 I/Os | 177669 MPV-E/A08-M8 | 1 | |
|  | - | 15-pin Sub-D socket/12x 3-pin M8 plugs | 12 I/Os | 177670 MPV-E/A12-M8 | 1 | |
|  | - | 15-pin cable/8x 5-pin M12 plugs | 8 I/Os | 177671 MPV-E/A08-M12 | 1 | |
| Push-in fitting with connecting thread | | | | | | |
|  | - | G ¹ / ₈ for | Tubing O.D. 6 mm | Plastic releasing ring | 186096 QS-G¹/₈-6 | 10 |
| | E | | | Metal releasing ring | 558662 NPQM-D-G18-Q6-P10 | 10 |
| | - | | Tubing O.D. 8 mm | Plastic releasing ring | 186098 QS-G¹/₈-8 | 10 |
| | E | | | Metal releasing ring | 558663 NPQM-D-G18-Q8-P10 | 10 |
| | - | | Tubing O.D. 10 mm | Plastic releasing ring | 190643 QS-G¹/₈-10 | 10 |
| | E | | | Metal releasing ring | 558665 NPQM-D-G14-Q8-P10 | 10 |
| | - | G ¹ / ₄ for | Tubing O.D. 8 mm | Plastic releasing ring | 186099 QS-G¹/₄-8 | 10 |
| | E | | | Metal releasing ring | 558665 NPQM-D-G14-Q8-P10 | 10 |
| | - | | Tubing O.D. 10 mm | Plastic releasing ring | 186101 QS-G¹/₄-10 | 10 |
| | E | | | Metal releasing ring | 558666 NPQM-D-G14-Q10-P10 | 10 |
| | - | Tubing O.D. 12 mm | Plastic releasing ring | 186350 QS-G¹/₄-12 | 10 | |
| | E | | Metal releasing ring | 558667 NPQM-D-G14-Q12-P10 | 10 | |
| | - | G ³ / ₈ for | Tubing O.D. 10 mm | Plastic releasing ring | 186102 QS-G³/₈-10 | 10 |
| | E | | | Metal releasing ring | 558669 NPQM-D-G38-Q10-P10 | 10 |
| | - | Tubing O.D. 12 mm | Plastic releasing ring | 186114 QS-G³/₈-12-I | 10 | |
| | E | | Metal releasing ring | 558670 NPQM-D-G38-Q12-P10 | 10 | |
| - | G ¹ / ₂ for | Tubing O.D. 12 mm | Plastic releasing ring | 186104 QS-G¹/₂-12 | 1 | |
| E | | | Metal releasing ring | 558672 NPQM-D-G12-Q12-P10 | 10 | |
| E | | Tubing O.D. 14 mm | Metal releasing ring | 570451 NPQM-D-G12-Q14-P10 | 1 | |
| - | | Tubing O.D. 16 mm | Plastic releasing ring | 186105 QS-G¹/₂-16 | 1 | |
| Barbed hose fitting/push-in fitting | | | | | | |
|  | - | For right-hand end plate | G ³ / ₄ | 8040613 QS-G³/₄-22 | 1 | |
| | - | | R1 | 572260 N-1-P-19 | 1 | |
| | - | For adapter plate | R1 | 572260 N-1-P-19 | 1 | |

1) Packaging unit




-  - Note

Where the highest protection is required for electrical and electronic components (antistatic requirements), push-in fittings in a metal design, type NPQM-... should be selected.

Valve terminal VTSA/VTSA-F

Accessories

FESTO

| Ordering data | | | | | | |
|--|------|-------------------------------------|----------|----------------|----------------------|----|
| | Code | Description | Part No. | Type | PU ¹⁾ | |
| Silencer | | | | | | |
|  | U | Standard version, connecting thread | G1/8 | 6841 | U-1/8-B | 1 |
| | | | G1/4 | 2316 | U-1/4 | 1 |
| | | | G1/2 | 6844 | U-1/2-B | 1 |
| | | | G3/4 | 6845 | U-3/4-B | 1 |
| | | | G1 | 151990 | U-1-B | 1 |
|  | A | Sintered version, connecting thread | G1/8 | 1205860 | AMTE-M-LH-G18 | 20 |
| | | | G1/4 | 1205861 | AMTE-M-LH-G14 | 20 |
| | | | G1/2 | 1205863 | AMTE-M-LH-G12 | 10 |
| | | | G3/4 | 1205864 | AMTE-M-LH-G34 | 10 |
| | | | G1 | 1205865 | AMTE-M-LH-G1 | 10 |
| Blanking plug | | | | | | |
|  | - | Connecting thread | M5 | 3843 | B-M5 | 10 |
| | | | G1/8 | 3568 | B-1/8 | 10 |
| | | | G1/4 | 3569 | B-1/4 | 10 |
| | | | G1/2 | 3571 | B-1/2 | 10 |
| | | | G3/4 | 3572 | B-3/4 | 1 |
| | | | G1 | 5763 | B-1 | 1 |
| Other pneumatic connection accessories | | | | | | |
| A selection of possible fittings, blanking plugs and silencers can be found on the Internet via the individual search terms: Internet → connection technology, silencer, blanking plug | | | | | | |

1) Packaging unit