


Low-Speed Compact Rotary Actuator Rack & Pinion Type **CRQ2X Series**

Size: 10, 15, 20, 30, 40

How to Order

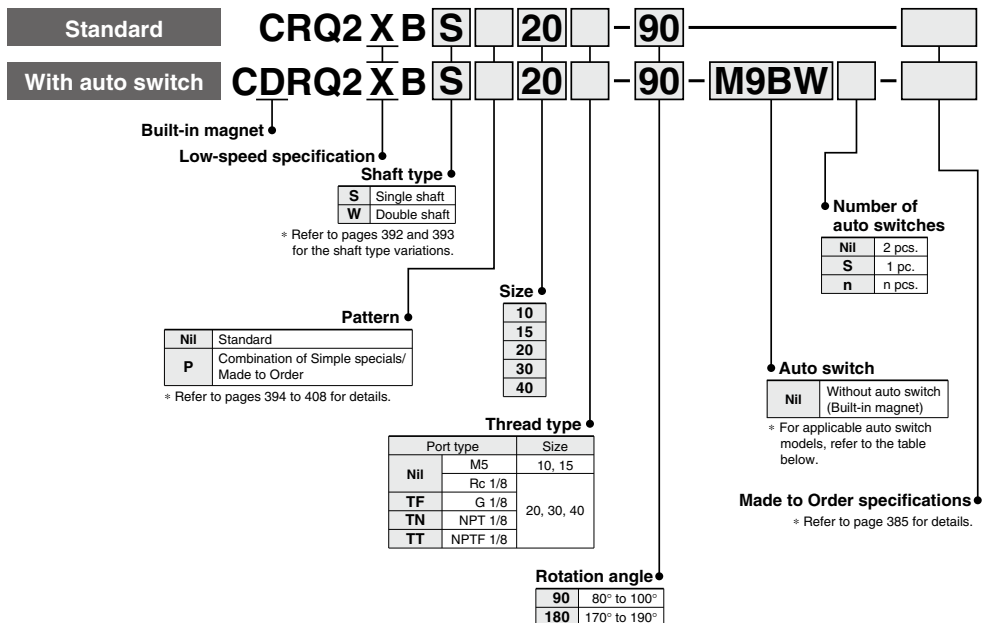

Applicable Auto Switches

Refer to pages 929 to 983 for detailed auto switch specification.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m) *			Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)		5 (Z)	IC circuit	Relay, PLC
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	—	M9NV	M9N	●	●	●	○	—	—	
				3-wire (PNP)			M9PV	M9P	●	●	●	○			
				2-wire			M9BV	M9B	●	●	●	○			
				3-wire (NPN)			M9NVW	M9NW	●	●	●	○			
	Diagnostic indication (2-color indicator)			3-wire (PNP)	M9PWW	M9PW	●	●	●	○	IC circuit	Relay, PLC			
				2-wire	M9BWW	M9BW	●	●	●	○	—				
				3-wire (NPN)	M9NAV ^{#1}	M9NA ^{#1}	○	○	●	○	IC circuit				
				3-wire (PNP)	M9PAV ^{#1}	M9PA ^{#1}	○	○	●	○	IC circuit				
Water resistant (2-color indicator)	2-wire	M9BAV ^{#1}	M9BA ^{#1}	○	○	●	○	—							
	3-wire (NPN)	—	5 V	—	A96V	A96	●	—	—	—	—	IC circuit	—		
	3-wire (PNP)				A93V ^{#2}	A93	●	●	●	—	—				
	2-wire				A90V	A90	●	—	—	—	—	IC circuit			
2-wire	100 V or less				100 V or less	—	—	—	—	—	—	Relay, PLC			

*1 Although it is possible to mount water resistant type auto switches, note that the rotary actuator itself is not of water resistant construction.

*2 1 m type lead wire is only applicable to D-A93.


* Lead wire length symbols: 0.5 m Nil
1 m M
3 m L
5 m Z
(Example) M9NW
(Example) M9NWM
(Example) M9NWL
(Example) M9NWZ

* Auto switches marked with a "○" are produced upon receipt of orders.

* Refer to pages 970 and 971 for the details of solid state auto switch with pre-wired connector.

* Auto switches are shipped together, (but not assembled).

Specifications

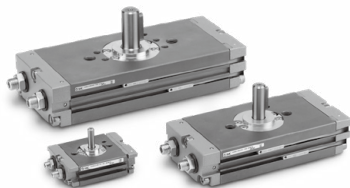

Size	10	15	20	30	40
Fluid	Air (Non-lube)				
Max. operating pressure	0.7 MPa		1 MPa		
Min. operating pressure	0.15 MPa		0.1 MPa		
Ambient and fluid temperature	0° to 60°C (No freezing)				
Cushion	Not attached				
Angle adjustment range	Rotation end ±5°				
Rotation angle	80° to 100°, 170° to 190°				
Port size	M5 x 0.8		Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8		
Output (N·m)*	0.30	0.75	1.8	3.1	5.3

* Output under the operating pressure at 0.5 MPa. Refer to page 381 for further information.

Symbol



Made to Order
(Refer to pages 394 to 408 for details.)

Symbol	Specifications/Content	Applicable shaft type
—	Shaft type variation	X,Y,Z,T,J,K
XA1 to XA24	Shaft pattern sequencing I	S,W
XA31 to XA59	Shaft pattern sequencing II	X,Y,Z,T,J,K
XC7	Reversed shaft	S,W,X,T,J
XC8 to XC11	Change of rotating range	S,W,Y X*,Z*,T*, J*,K*
XC12 to XC15	Change of angle adjustable range (0° to 100°)*	
XC16, XC17	Change of angle adjustable range (90° to 190°)*	
XC18, XC19	Change of rotating range	
XC20, XC21	Change of angle adjustable range (90° to 190°)*	
X6	Shaft and parallel key made of stainless steel	

* Among the symbols XC8 to XC21, only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Allowable Kinetic Energy and Rotation Time Adjustment Range

Size	Allowable kinetic energy (J)	Stable operational rotation time adjustment range (s/90°)
10	0.00025	0.7 to 5
15	0.00039	
20	0.025	
30	0.048	1 to 5
40	0.081	

(Note) If operated where the kinetic energy exceeds the allowable value, this may cause damage to the internal parts and result in product failure. Please pay special attention to the kinetic energy levels when designing, adjusting and during operation to avoid exceeding the allowable limit.

Weight

Size	Standard weight*(g)	
	90°	180°
10	120	150
15	220	270
20	600	700
30	900	1100
40	1400	1600

* Not including the weight of auto switch.

Moisture Control Tube IDK Series



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.


Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to [the Web Catalog](#).

CRQ2X Series


Rotation Range

When pressurized from the port indicated by the arrow, the shaft will rotate in a clockwise direction.

Rotation angle: 90°




Rotation angle: 180°

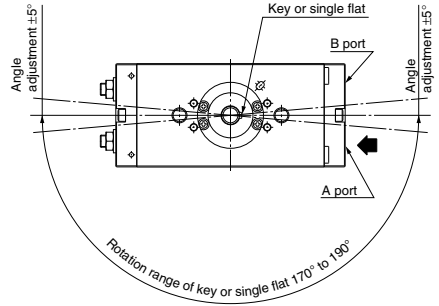


Construction

Standard
Size 10/15

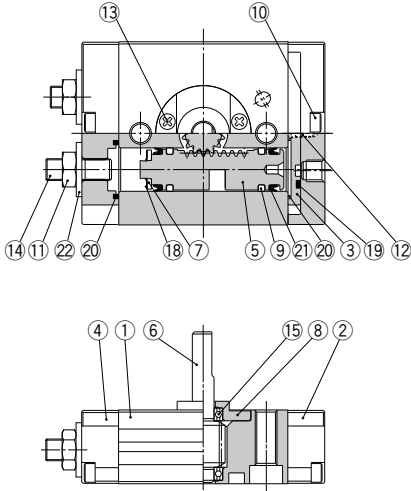

Standard
Size 20/30/40

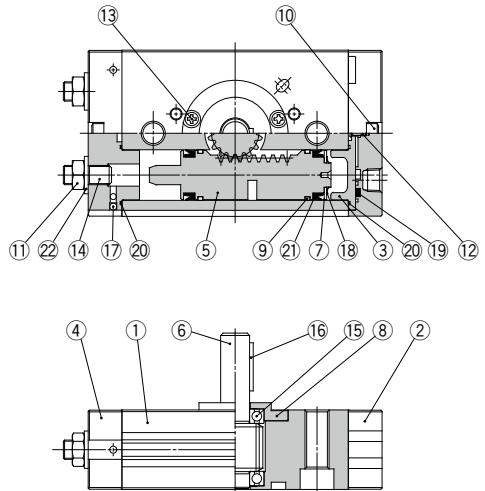

Component Parts

No.	Description	Material
1	Body	Aluminum alloy
2	Cover	Aluminum alloy
3	Plate	Aluminum alloy
4	End cover	Aluminum alloy
5	Piston	Stainless steel
6	Shaft	Size: 10, 15 Stainless steel
		Size: 20, 30, 40 Chrome molybdenum steel
7	Seal retainer	Aluminum alloy
8	Bearing retainer	Aluminum alloy
9	Wear ring	Resin
10	Hexagon socket head cap screw	Stainless steel
11	Size: 10, 15 Hexagon nut	Steel wire
	Size: 20, 30, 40 Small hexagon nut	

Component Parts

No.	Description	Material
12	Cross recessed screw No. 0	Steel wire
13	Size: 10, 15 Cross recessed screw No. 0	Steel wire
	Size: 20, 30, 40 Cross recessed screw	
14	Hexagon socket head set screw	Chrome molybdenum steel
15	Bearing	Bearing steel
16	Size: 20, 30, 40 only Parallel key	Carbon steel
17	Size: 20, 30, 40 only Steel ball	Stainless steel
18	Type CS retaining ring	Stainless steel
19	Seal	NBR
20	Gasket	NBR
21	Piston seal	NBR
22	Seal washer	NBR
23	With auto switch only Magnet	—

Replacement Parts

Description	Part no.					Note
	10	15	20	30	40	
Seal kit	P473010-23	P473020-23	P473030-23	P473040-23	P473050-23	A set of above numbers ⑨, ⑰, ⑳, ㉑ and ㉒

Parts included in Seal Kit

No.	Description	Qty.	Note
9	Wear ring	4	
19	Seal	1	
20	Gasket for cover	2	Size: 10, 15
	Gasket for end cover	1	
	Gasket	4	Size: 20, 30, 40
21	Piston seal	4	
22	Seal washer	2	

* A set includes all parts above.



A grease pack (10 g) is included. When only a grease pack is needed, order with the following part number.

Replacement parts/Grease pack part no: P523010-21 (10 g)



CRQ2X Series

Construction

With auto switch
Size 10/15



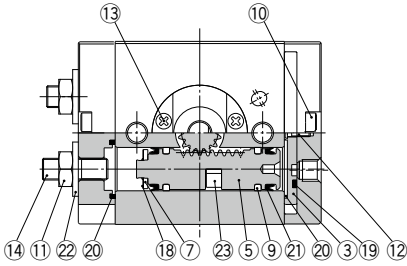


With auto switch
Size 20/30/40

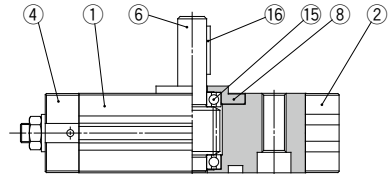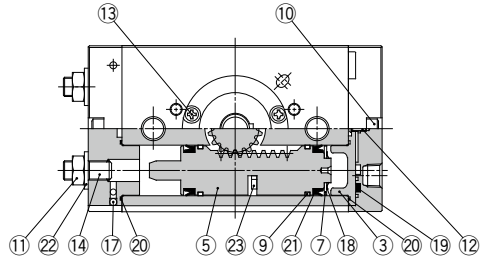

Dimensions

Size 10/15

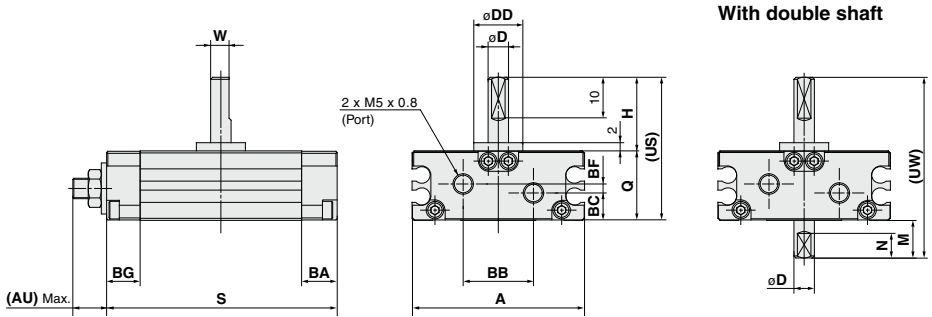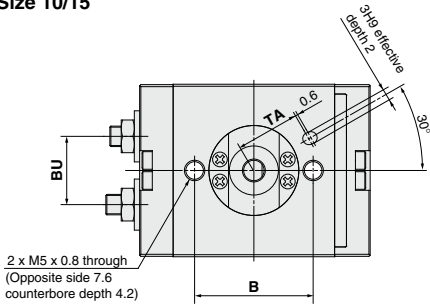

(mm)

Size	Rotation angle	A	AU*	B	BA	BB	BC	BF	BG	BU	D (g6)	DD (h9)	H
10	90°, 180°	42.4	(8.5)	29	8.7	17.2	6.7	2.2	8.2	16.7	5	12	18
15	90°, 180°	53.6	(9.5)	31	9.2	26.4	10.6	—	9	23.1	6	14	20

Size	Rotation angle	W	Q	S	US	UW	N	M	TA	TC	TD
10	90°	4.5	17	56.4	35	44	6	9	15.5	8	15.4
	180°			68.9							
15	90°	5.5	20	65.2	40	50	7	10	16	9	17.6
	180°			82.2							




* The AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts.

S: Upper 90°, Lower 180°



CRQ2X Series

Dimensions

Size 20/30/40

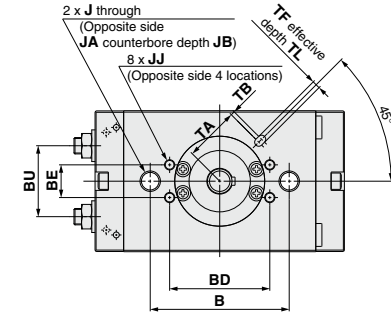

With double shaft




Size	Rotation angle	A	AU*	B	BA	BB	BC	BD	BE	BU	D (g6)	DD (h9)	F	H	J	JA	JB	JJ	K
20	90°, 180°	63	(11)	50	14	34	14.5	—	—	30.4	10	25	2.5	30	M8 x 1.25	11	6.5	—	3
30	90°, 180°	69	(11)	68	14	39	16.5	49	16	34.7	12	30	3	32	M10 x 1.5	14	8.5	M5 x 0.8 depth 6	4
40	90°, 180°	78	(13)	76	16	47	18.5	55	16	40.4	15	32	3	36	M10 x 1.5	14	8.6	M6 x 1 depth 7	5

Size	Rotation angle	Q	S	W	Key dimensions		US	TA	TB	TC	TD	TF (H9)	TG (H9)	TL	UW	G	M	N	L
					b	L1													
20	90°	29	104.4	11.5	4 ⁰ _{-0.03}	20	59	24.5	1	13.5	27	4	4	2.5	74	8 ⁰ _{-0.1}	15	11	9.6 ⁰ _{-0.1}
	180°																		
30	90°	33	122	13.5	4 ⁰ _{-0.03}	20	65	27	2	19	36	4	4	2.5	83	10 ⁰ _{-0.1}	18	13	11.4 ⁰ _{-0.1}
	180°																		
40	90°	37	139.3	17	5 ⁰ _{-0.03}	25	73	32.5	2	20	39.5	5	5	3.5	93	11 ⁰ _{-0.1}	20	15	14 ⁰ _{-0.1}
	180°																		

* The AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts. S: Upper 90°, Lower 180°
 ** In addition to Rc 1/8, G 1/8, NPT 1/8 and NPTF 1/8 are also available.


Unit Used as Flange Mount

The L dimensions of this unit are shown in the below table. When hexagon socket head cap bolt of the JIS standard is used, the head of the bolt will recess into the groove of actuator.

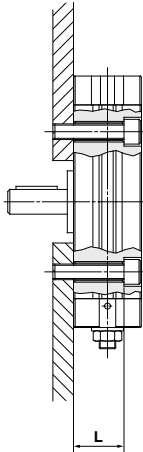

Size	L	Screw
10	13	M4
15	16	M4
20	22.5	M6
30	24.5	M8
40	28.5	M8

Auto Switch Proper Mounting Position (at Rotation End Detection)

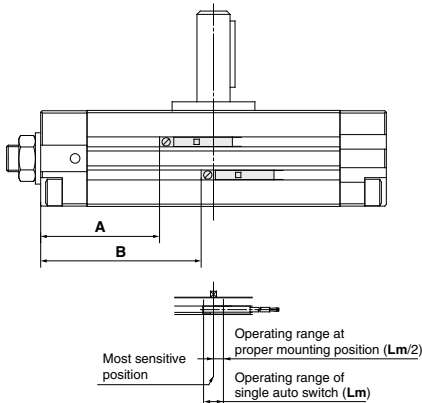

Size	Rotation angle	Solid state switch				Reed switch			
		A	B	Operating angle (θ m)	Hysteresis angle	A	B	Operating angle (θ m)	Hysteresis angle
10	90°	19	25.5	61°	5°	15	21.5	63°	12°
	180°	22	35			18	31		
15	90°	22.5	31	47°	4°	18.5	27	52°	9°
	180°	26.5	43.5			22.5	39.5		
20	90°	40	52.5	40°	4°	36	48.5	41°	9°
	180°	46	71.5			42	67.5		
30	90°	47	63	29°	2°	43	59	32°	7°
	180°	55	86			51	82		
40	90°	54	73	24°	2°	50	69	24°	5°
	180°	63.5	101.5			59.5	97.5		

Operating angle θm: Value of the operating range of single auto switch (Lm) as represented by rotation angle for shaft


Hysteresis angle: Value of the auto switch hysteresis as represented by angle

(Note) Since the above values are only provided as a guideline, they are not guaranteed.

In the actual setting, adjust them after confirming the auto switch operating condition.

CRQ2X Series

1 Shaft Type Variation, Four Chamfers (Size 20/30/40) (Dimension parts different from the standard conform to the general tolerance.) Shaft Type: X, Z

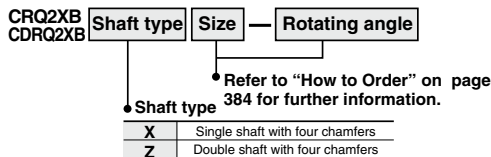


Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Single w/ four chamfers (X), Double w/ four chamfers (Z)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached
Rotation	80° to 100°, 170° to 190°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

Dimensions

Shaft type	X				Z			
Form								
	Size	D (g6)	G	H	N	UX	UZ	M
	20	10	8 ⁰ _{-0.1}	21	11	50	65	15
	30	12	10 ⁰ _{-0.1}	24	13	57	75	18
	40	15	11 ⁰ _{-0.1}	27	15	64	84	20

2 Shaft Type Variation, Double Shaft With Key (Size 20/30/40) (Dimension parts different from the standard conform to the general tolerance.) Shaft Type: Y

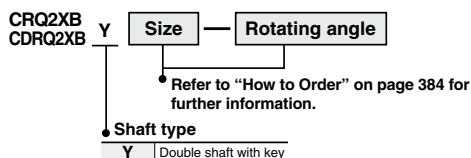

Dimensions

Y

Size	D (g6)	W	H	UY
20	10	11.5	30	89
30	12	13.5	32	97
40	15	17	36	109

Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Double shaft with key (Y)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached
Rotating angle	80° to 100°, 170° to 190°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

3 Shaft Type Variation/Without Keyway (Dimension parts different from the standard conform to the general tolerance.) **Shaft Type: T, J, K**

CRQ2XB
CDRQ2XB

Shaft type Size Rotating angle

● Shaft type
● Refer to "How to Order" on page 384 for further information.

T	Single round shaft
J	Double (Without long shaft key, with four chamfers on short shaft, one chamfer on short shaft for 10 and 15.)
K	Double round shaft

Specifications

Fluid	Air (Non-lube)	
Applicable shaft type	Single round shaft (T), Double shaft (J), Double round shaft (K)	
Applicable size	10, 15	20, 30, 40
Max. operating pressure	0.7 MPa	1.0 MPa
Min. operating pressure	0.15 MPa	0.1 MPa
Cushion	Not attached	
Rotating angle	80° to 100°, 170° to 190°	
Port size	M5 x 0.8	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable	

Dimensions

Shaft type	T				J				K	
Form					Size 20, 30, 40 					
					Size 10, 15 					
Size	D (g6)	G	W	H	M	N	UT	UJ	UK	
10	5	—	4.5	18	9	6	35	44	53	
15	6	—	5.5	20	10	7	40	50	60	
20	10	8 ⁰ _{-0.1}	—	30	15	11	59	74	89	
30	12	10 ⁰ _{-0.1}	—	32	18	13	65	83	97	
40	15	11 ⁰ _{-0.1}	—	36	20	15	73	93	109	

CRQ2X Series (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA1 to -XA24: Shaft Pattern Sequencing I

Shaft shape pattern is dealt with through the Simple Specials System.
Please contact your local sales representative for more details.


Symbol

-XA1 to XA24

Shaft Pattern Sequencing I

Applicable shaft type: S, W

How to Order



Built-in magnet

NII	None
D	Built-in magnet

Shaft type

S	Single shaft
W	Double shaft

Pattern

Size

10
15
20
30
40

Auto switch

Refer to page 384 for the part no. of auto switches.

How to order model with auto switches

Refer to page 384 for "How to Order" products with auto switch.

Thread type

Size	Port type
10, 15	Nil M5
	Nil Rc 1/8
20, 30, 40	TF G 1/8
	TN NPT 1/8
	TT NPTF 1/8

Rotating angle

90	80° to 100°
180	170° to 190°

- Symbol for simple special, Made-to-Order products
- When the number of combinations is 1 or 2, refer to chart 1 and 2.
- * Combination of XA is possible for up to 2 types.
- * Combination of -X6 (Shaft, parallel stainless steel spec) is available with all the types.

Combination 3 Types

A 1	A24	C12
A 2	A24	-X 6
A13	C 7	C 8
A14	C12	-X 6

Combination of Applicable Chart

Chart 1, 2
Chart 1
Chart 2, 5
Chart 2

Combination is available only when all the conditions are fulfilled among the combination chart above.

Combination 4 Types

A 1	A 2	C 7	C 8
A 2	A24	C10	-X 6
A14	C 7	C11	-X 6

Combination of Applicable Chart

Chart 1, 2, 5
Chart 1, 2
Chart 2, 5

Combination is available only when all the conditions are fulfilled among the combination chart above.

* Combination of simple specials and Made-to-Order, it is possible for up to 4 types.

Combination Chart of Simple Specials for Tip End Shape

Chart 1. Combination between -XA□ and -XA□ (S, W shaft)

Symbol	Description	Top port		Shaft type		Applicable size	Combination																							
		Upper	Lower	S	W		XA 1	XA 2	XA 3	XA 4	XA 5	XA 6	XA 7	XA 8	XA 9	XA10	XA11	XA12	XA13	XA14	XA15	XA16	XA17	XA18	XA20	XA21	XA22			
XA 1	Female thread at the end	●	—	●	●	10, 15		●																						
XA 2	Female thread at the end	—	●	●	●	20, 30, 40	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
XA 3	Tip end of male thread	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 4	Tip end of male thread	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 5	Stepped round shaft	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 6	Stepped round shaft	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 7	Round shaft with steps and male thread	—	—	—	●	10, 15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 8	Round shaft with steps and male thread	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA 9	Change of the length of standard chamfered face	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA10	Change of the length of standard chamfered face	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA11	Two-sided chamfer	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA12	Two-sided chamfer	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA13	Shaft through-hole	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA14	Shaft through-hole and female thread	—	—	—	●	10, 15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA15	Shaft through-hole and female thread	—	—	—	●	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA16	Shaft through-hole and female thread	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA17	Shortened shaft	—	—	—	●	10, 15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA18	Shortened shaft	—	—	—	●	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA19	Shortened shaft	—	—	—	●	10, 15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA20	Reversed shaft	—	—	—	●	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA21	Stepped round shaft with double-sided chamfer	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA22	Stepped round shaft with double-sided chamfer	—	—	—	●	10, 15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA23	Right-angle chamfer	—	—	—	●		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA24	Double key	—	—	—	●	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Combination Chart of Made to Order

Chart 2. Combination between -XA□ and -XC□ (Made to Order/ Details of -XC□, refer to page 404.)

Symbol	Description	Applicable size	Combination XA1 to XA24	Symbol	Description	Applicable size	Combination XA1 to XA24
XC 7	Reversed shaft	10, 15 20, 30, 40	—	XC18	Change of rotating range	20, 30, 40	●
XC 8	Change of rotating range		●	XC19			●
XC 9			●	XC20			●
XC10			●	XC21			●
XC11			●				
XC12	Change in angle adjustable range 0° to 100°		●				
XC13			●				
XC14			●				
XC15	Change in angle adjustable range 90° to 190°	●					
XC16		●					
XC17		●					

* Chart 5. Refer to page 404 for combination available between -XC□ and -XC□.

Shaft Pattern Sequencing I

Symbol


-XA1 to XA8

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the \square portion of the diagram.
6. XA1 to XA24 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A1


Machine female threads into the long shaft.
The maximum dimension L1 is, as a rule, twice the thread size (Example) For M3: L1 = 6
• Applicable shaft types: S, W



Size	Q1
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A2

Machine female threads into the short shaft.
The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8
• Applicable shaft types: S, W




Size	Q2
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A3

The long shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension X.)

- Applicable shaft types: S, W




Size	X	L1 max	Q1
10	9 to 18	X - 4	M5
15	10 to 20	X - 4	M6

Symbol: A4

The short shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension Y.)

- Applicable shaft type: W




Size	Y	L2 max	Q2
10	7 to 9	Y - 2	M5
15	8 to 10	Y - 3	M6

Symbol: A5

The long shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension X.)

- (If not specifying dimension C1, indicate "*" instead.)
- Applicable shaft types: S, W
- Equal dimensions are indicated by the same marker.




Size	X	L1 max	D1
10	3 to 18	X - 2	ø3.5 to ø4.9
15	3 to 20	X - 2	ø3.5 to ø5.9

Symbol: A6

The short shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension Y.)

- (If not specifying dimension C2, indicate "*" instead.)
- Applicable shaft type: W
- Equal dimensions are indicated by the same marker.




Size	Y	L2 max	D2
10	1 to 9	Y	ø3.5 to ø4.9
15	1 to 10	Y	ø3.5 to ø5.9

Symbol: A7

The long shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension X.)

- (If not specifying dimension C1, indicate "*" instead.)
- Applicable shaft types: S, W




Size	X	L1 max	Q1
10	8 to 18	X - 2	M3, M4
15	9.5 to 20	X - 2	M3, M4, M5

Symbol: A8

The short shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension Y.)

- (If not specifying dimension C2, indicate "*" instead.)
- Applicable shaft type: W



Size	Y	L2 max	Q2
10	6 to 9	Y	M3, M4
15	7.5 to 10	Y	M3, M4, M5

Shaft Pattern Sequencing I

Symbol

-XA9 to XA16


Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the \square portion of the diagram.
6. XA9 to XA24 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A9

The long shaft can be further shortened by changing the length of the standard chamfer on the long shaft side.
(If shortening the shaft is not required, indicate "*" for dimension X.)

- Applicable shaft types: S, W




Size	X	L1
10	8 to 18	$\{10 - (18 - X)\}$ to $(X - 2)$
15	10 to 20	$\{10 - (20 - X)\}$ to $(X - 2)$

Symbol: A10

The short shaft can be further shortened by changing the length of the standard chamfer.
(If shortening the shaft is not required, indicate "*" for dimension Y.)

- Applicable shaft type: W



Size	Y	L2
10	3 to 9	$6 - (9 - Y)$ to Y
15	3 to 10	$7 - (10 - Y)$ to Y


Symbol: A11

The long shaft can be further shortened by machining a double-sided chamfer on it.

- Since L1 is a standard chamfer, dimension E1 is 0.5 or more.

(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L1 and X dimensions.)

- Applicable shaft types: S, W



Size	X	L1	L3 max
10	8 to 18	$\{10 - (18 - X)\}$ to $(X - 2)$	X - 2
15	10 to 20	$\{10 - (20 - X)\}$ to $(X - 2)$	X - 2


Symbol: A12

The short shaft can be further shortened by machining a double-sided chamfer on it.

- Since L2 is a standard chamfer, dimension E2 is 0.5 or more.

(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L2 and Y dimensions.)

- Applicable shaft type: W




Size	Y	L2	L4 max
10	3 to 9	$6 - (9 - Y)$ to Y	Y
15	3 to 10	$7 - (10 - Y)$ to Y	Y

Symbol: A13

Shaft with through-hole
Minimum machining diameter for d1 is 0.1.

- Applicable shaft types: S, W



Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7


Symbol: A14

A special end is machined onto the long shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L1 is, as a rule, twice the thread size.

- (Example) For M3: L1 = 6

- Applicable shaft types: S, W




Size	10	15	20	30	40
Thread	M3 x 0.5	ø2.5	ø2.5	ø2.5	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: A15

A special end is machined onto the short shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8

- Applicable shaft types: S, W



Size	10	15	20	30	40
Thread	M3 x 0.5	ø2.5	ø2.5	ø2.5	—
M4 x 0.7	—	ø3.3	ø3.3	—	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5


Symbol: A16

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size. (Example) For M5: L1 = 10

- Applicable shaft types: S, W

- Equal dimensions are indicated by the same marker.



Size	10	15	20	30	40
Thread	M3 x 0.5	ø2.5	ø2.5	ø2.5	—
M4 x 0.7	—	ø3.3	ø3.3	—	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5


Shaft Pattern Sequencing I

Symbol

-XA17 to XA24

Symbol: A17


Shorten the long shaft.
 • Applicable shaft types: S, W



Size	X (mm)
10	2 to 18
15	2 to 20
20	17 to 30
30	18 to 32
40	18.5 to 36

Symbol: A18


Shorten the short shaft.
 • Applicable shaft type: W



Size	Y (mm)
10	1 to 9
15	1 to 10
20	1 to 15
30	1 to 18
40	1 to 20

Symbol: A19


Both the long shaft and short shaft are shortened.
 • Applicable shaft type: W



Size	X (mm)	Y (mm)
10	2 to 18	1 to 9
15	2 to 20	1 to 10
20	17 to 30	1 to 15
30	18 to 32	1 to 18
40	18.5 to 36	1 to 20

Symbol: A20


Reverse the assembly of the shaft. (Thus shortening the long end and the short end of the shaft.)
 (If shortening the shaft is not required, indicate "*" for dimension X and Y.)
 • Applicable shaft types: S, W



Size	X (mm)	Y (mm)
10	2 to 10	1 to 17
15	2 to 11	1 to 19
20	2.5 to 16.5	16 to 28.5
30	3 to 20	16 to 30
40	3 to 22	16.5 to 34

Symbol: A21


The long shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
 (If shortening the shaft is not required, indicate "*" for dimension X.) (If not specifying dimension C1, indicate "*" instead.)
 • Applicable shaft types: S, W
 • Equal dimensions are indicated by the same marker.



Size	X	L1 max	L3	D1
10	5 to 18	X - 3.5	L1 + 1.5	ø3.5 to ø4.9
15	5.5 to 18	X - 4	L1 + 2	ø3.5 to ø5.9

Symbol: A22


The short shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
 (If shortening the shaft is not required, indicate "*" for dimension Y.)
 (If not specifying dimension C2, indicate "*" instead.)
 Depending on the change that has been made, the flat portion of the standard product may remain.



Size	Y	L2 max	L4	D2
10	3 to 9	Y - 1.5	L2 + 1.5	ø3.5 to ø4.9
15	3.5 to 10	Y - 2	L2 + 2	ø3.5 to ø5.9

Symbol: A23


The long shaft can be further shortened by machining right-angle double-sided chamfer onto it.
 • Since L1 is a standard chamfer, dimension E1 is 0.5 or more.
 (If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L1 and X dimensions.)
 • Applicable shaft types: S, W



Size	X	L1	L3 max
10	8 to 18	{10 - (18 - X)} to {X - 2}	X - 2
15	10 to 20	{10 - (20 - X)} to {X - 2}	X - 2

Symbol: A24

Double key
 Keys and keyways are machined at 180° on the standard position.
 • Applicable shaft types: S, W
 • Equal dimensions are indicated by the same marker.



Size	Key dimensions	LL
20	4 x 4 x 20	3
30	4 x 4 x 20	4
40	5 x 5 x 25	5

Simple Specials:

-XA31 to -XA59: Shaft Pattern Sequencing II

Shaft shape pattern is dealt with through the Simple Specials System.
Please contact your local sales representative for more details.

Symbol

-XA31 to XA59

Shaft Pattern Sequencing II

Applicable shaft type: X, Y, Z, T, J and K

How to Order

C **D** **RQ2XB** **T** **P** **20** **90** **M9BW** **X** **A34** **A37** **C12** **-X6**

• **Built-in magnet**

NII	None
D	Built-in magnet

• **Shaft type**

X	Single shaft with four chamfers
Y	Double shaft key
Z	Double shaft with four chamfers
T	Single round shaft
J	Double shaft
K	Double round shaft

* Refer to pages 392 and 393 for the shaft type variations.

• **Size**

10
15
20
30
40

• **Auto switch**

Refer to page 384 for "How to Order" products with auto switches.

• **Rotating angle**

90	80° to 100°
180	170° to 190°

• **Symbol for simple specials, Made-to-Order products**

- When number of combinations is 1 or 2, refer to chart 3 and 4.
- * Combination of XA is possible for up to 2 types.
- * Combination of -X6 (shaft, parallel key stainless steel spec) is available for all the types.

• **Combination 3 Types**

A33	A34	C12
A34	A37	-X 6
A35	C 7	C12
A40	C 8	-X 6

• **Combination of Applicable Chart**

Chart 3, 4
Chart 3
Chart 4, 5
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

• **Combination 4 Types**

A33	A34	C 7	C12
A34	A37	C12	-X 6
A43	C 7	C11	-X 6

• **Combination of Applicable Chart**

Chart 3, 4, 5
Chart 3, 4
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

*Combination of simple specials and Made-to-Order, it is possible for up to 4 types.

• **Pattern**

How to order model with auto switches

Refer to page 384 for "How to Order" products with auto switches.

• **Thread type**

Size	Port type	
10, 15	NII	M5
	TF	G 1/8
20, 30, 40	TN	NPT 1/8
	TT	NPTF 1/8
	NII	Rc 1/8

Shaft Pattern Sequencing II


Symbol
-XA31 to XA38

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the portion of the diagram.
6. XA31 to XA59 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A31


Machine female threads into the long shaft.
 • The maximum dimension L1 is, as a rule, twice the thread size.
 (Example) For M3: L1 = 6
 • Applicable shaft type: Y



Size	Q1
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A32


Machine female threads into the short shaft.
 • The maximum dimension L2 is, as a rule, twice the thread size.
 (Example) For M4: L2 = 8
 • Applicable shaft type: Y



Size	Q2
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A33


Machine female threads into the long shaft.
 • The maximum dimension L1 is, as a rule, twice the thread size.
 (Example) For M3: L1 = 6
 • Applicable shaft types: J, K, T



Size	Q1
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A34


Machine female threads into the short shaft.
 • The maximum dimension L2 is, as a rule, twice the thread size.
 (Example) For M5: L2 = 10
 • Applicable shaft types: K, T, X



Size	Q2
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A35


Machine female threads into the long shaft.
 • The maximum dimension L1 is, as a rule, twice the thread size.
 (Example) For M3: L1 = 6
 • Applicable shaft types: X, Z



Size	Q1
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A36


Machine female threads into the short shaft.
 • The maximum dimension L2 is, as a rule, twice the thread size.
 (Example) For M4: L2 = 8
 • Applicable shaft types: J, Z



Size	Q2
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A37


The long shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "∞" for dimension X.) (If not specifying dimension C1, indicate "∞" instead.)
 • Applicable shaft types: J, K, T
 • Equal dimensions are indicated by the same marker.



Size	X	L1 max	D1
10	3 to 18	X-2	ø3.5 to ø4.9
15	3 to 20	X-2	ø3.5 to ø5.9
20	3.5 to 30	X-2.5	ø5 to ø9.9
30	4 to 32	X-3	ø5 to ø11.9
40	4 to 36	X-3	ø5 to ø14.9

Symbol: A38

The short shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "∞" for dimension Y.) (If not specifying dimension C2, indicate "∞" instead.)
 • Applicable shaft type: K
 • Equal dimensions are indicated by the same marker.



Size	Y	L2 max	D2
10	1 to 18	Y	ø3.5 to ø4.9
15	1 to 20	Y	ø3.5 to ø5.9
20	1 to 30	Y	ø5 to ø9.9
30	1 to 32	Y	ø5 to ø11.9
40	1 to 36	Y	ø5 to ø14.9


Symbol

-XA39 to XA48

Shaft Pattern Sequencing II

Symbol: A39


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft type: Y



Size	d1
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7

Symbol: A40


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: K, T



Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø6
30	ø3 to ø8
40	ø4 to ø10

Symbol: A41

Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: J, X, Z




Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø5
30	ø3 to ø7
40	ø4 to ø8

Symbol: A42

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft type: Y
- Equal dimensions are indicated by the same marker.




Size	20	30	40
Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8
M3 x 0.5	ø2.5	—	—
M4 x 0.7	ø3.3	ø3.3	—
M5 x 0.8	—	ø4.2	ø4.2
M6 x 1	—	—	ø5

Symbol: A43

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft types: K, T
- Equal dimensions are indicated by the same marker.




Size	10	15	20	30	40
Thread	M 3 x 0.5	ø2.5	ø2.5	ø2.5	—
M 4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M 5 x 0.8	—	—	ø4.2	ø4.2	ø4.2
M 6 x 1	—	—	ø5	ø5	ø5
M 8 x 1.25	—	—	—	ø6.8	ø6.8
M10 x 1.5	—	—	—	—	ø8.5
Rc 1/8	—	—	—	—	ø8.2

Symbol: A44

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft types: J, X, Z
- Equal dimensions are indicated by the same marker.




Size	10	15	20	30	40
Thread	M3 x 0.5	ø2.5	ø2.5	ø2.5	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	ø4.2	ø4.2	ø4.2
M6 x 1	—	—	—	ø5	ø5
M8 x 1.25	—	—	—	—	ø6.8

Symbol: A45

The long shaft can be further shortened by machining a middle-cut chamfer into it. (If shortening the shaft is not required, indicate "s" for dimension X.)

(The position is that of the standard flat at the keyway portion.)

- Applicable shaft types: J, K, T




Size	X	W1	L1 max	L3 max
10	6 to 18	0.5 to 1.5	X - 2	L1 - 1
15	6.5 to 20	0.5 to 1.5	X - 2	L1 - 1
20	9.5 to 30	1 to 2	X - 2.5	L1 - 2
30	11.5 to 32	1 to 2	X - 3	L1 - 2
40	12.5 to 36	1 to 2	X - 3	L1 - 2

Symbol: A46

The short shaft can be further shortened by machining a middle-cut chamfer into it. (If shortening the shaft is not required, indicate "s" for dimension Y.)

(The position is that of the standard flat at the keyway portion.)

- Applicable shaft type: K




Size	Y	W2	L2 max	L4 max
10	4 to 18	0.5 to 1.5	Y	L2 - 1
15	4.5 to 20	0.5 to 1.5	Y	L2 - 1
20	6.5 to 30	1 to 2	Y	L2 - 2
30	8.5 to 32	1 to 2	Y	L2 - 2
40	9.5 to 36	1 to 2	Y	L2 - 2

Symbol: A48

Shorten the long shaft.

- Applicable shaft type: Y












Size 20, 30, 40

Size	X
20	17 to 30
30	18 to 32
40	18.5 to 36

Shaft Pattern Sequencing II

-XA49 to XA57
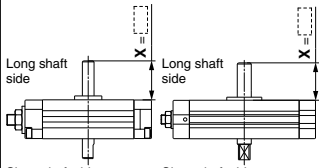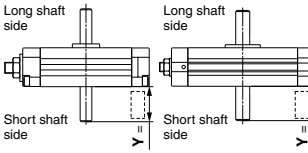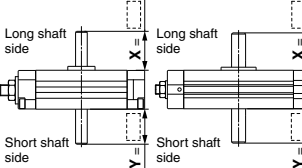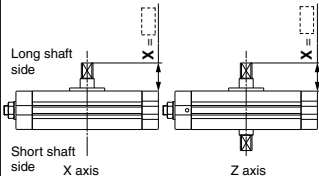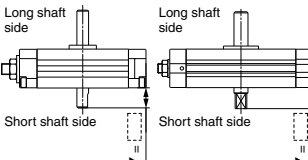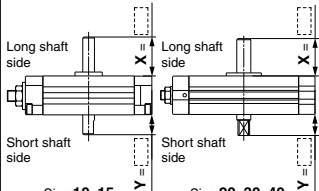
<p>Symbol: A49</p> <p>Shorten the short shaft. • Applicable shaft type: Y</p>  <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>17 to 30</td> </tr> <tr> <td>30</td> <td>18 to 32</td> </tr> <tr> <td>40</td> <td>18.5 to 36</td> </tr> </tbody> </table> <p>(mm)</p>	Size	Y	20	17 to 30	30	18 to 32	40	18.5 to 36	<p>Symbol: A50</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: Y</p>  <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>17 to 30</td> <td>17 to 30</td> </tr> <tr> <td>30</td> <td>18 to 32</td> <td>18 to 32</td> </tr> <tr> <td>40</td> <td>18.5 to 36</td> <td>18.5 to 36</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	Y	20	17 to 30	17 to 30	30	18 to 32	18 to 32	40	18.5 to 36	18.5 to 36	<p>Symbol: A51</p> <p>Shorten the long shaft. • Applicable shaft types: J, K, T</p>  <p>Long shaft side Short shaft side</p> <p>Size 10, 15</p> <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> </tr> <tr> <td>15</td> <td>3 to 20</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> </tr> <tr> <td>30</td> <td>4 to 32</td> </tr> <tr> <td>40</td> <td>4 to 36</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	10	3 to 18	15	3 to 20	20	3.5 to 30	30	4 to 32	40	4 to 36										
Size	Y																																											
20	17 to 30																																											
30	18 to 32																																											
40	18.5 to 36																																											
Size	X	Y																																										
20	17 to 30	17 to 30																																										
30	18 to 32	18 to 32																																										
40	18.5 to 36	18.5 to 36																																										
Size	X																																											
10	3 to 18																																											
15	3 to 20																																											
20	3.5 to 30																																											
30	4 to 32																																											
40	4 to 36																																											
<p>Symbol: A52</p> <p>Shorten the short shaft. • Applicable shaft type: K</p>  <p>Long shaft side Short shaft side</p> <p>Size 10, 15</p> <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>1 to 18</td> </tr> <tr> <td>15</td> <td>1 to 20</td> </tr> <tr> <td>20</td> <td>1 to 30</td> </tr> <tr> <td>30</td> <td>1 to 32</td> </tr> <tr> <td>40</td> <td>1 to 36</td> </tr> </tbody> </table> <p>(mm)</p>	Size	Y	10	1 to 18	15	1 to 20	20	1 to 30	30	1 to 32	40	1 to 36	<p>Symbol: A53</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: K</p>  <p>Long shaft side Short shaft side</p> <p>Size 10, 15</p> <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> <td>1 to 18</td> </tr> <tr> <td>15</td> <td>3 to 20</td> <td>1 to 20</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> <td>1 to 30</td> </tr> <tr> <td>30</td> <td>4 to 32</td> <td>1 to 32</td> </tr> <tr> <td>40</td> <td>4 to 36</td> <td>1 to 36</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	Y	10	3 to 18	1 to 18	15	3 to 20	1 to 20	20	3.5 to 30	1 to 30	30	4 to 32	1 to 32	40	4 to 36	1 to 36	<p>Symbol: A54</p> <p>Shorten the long shaft. • Applicable shaft types: X, Z</p>  <p>Long shaft side Short shaft side</p> <p>X axis</p> <p>Long shaft side Short shaft side</p> <p>Z axis</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>3.5 to 21</td> </tr> <tr> <td>30</td> <td>4 to 24</td> </tr> <tr> <td>40</td> <td>4 to 27</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	20	3.5 to 21	30	4 to 24	40	4 to 27				
Size	Y																																											
10	1 to 18																																											
15	1 to 20																																											
20	1 to 30																																											
30	1 to 32																																											
40	1 to 36																																											
Size	X	Y																																										
10	3 to 18	1 to 18																																										
15	3 to 20	1 to 20																																										
20	3.5 to 30	1 to 30																																										
30	4 to 32	1 to 32																																										
40	4 to 36	1 to 36																																										
Size	X																																											
20	3.5 to 21																																											
30	4 to 24																																											
40	4 to 27																																											
<p>Symbol: A55</p> <p>Shorten the short shaft. • Applicable shaft type: J, Z</p>  <p>Long shaft side Short shaft side</p> <p>Size 10, 15</p> <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>1 to 9</td> </tr> <tr> <td>15</td> <td>1 to 10</td> </tr> <tr> <td>20</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>1 to 20</td> </tr> </tbody> </table> <p>(mm)</p>	Size	Y	10	1 to 9	15	1 to 10	20	1 to 15	30	1 to 18	40	1 to 20	<p>Symbol: A56</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: Z</p>  <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>3.5 to 21</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>4 to 24</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>4 to 27</td> <td>1 to 20</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	Y	20	3.5 to 21	1 to 15	30	4 to 24	1 to 18	40	4 to 27	1 to 20	<p>Symbol: A57</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: J</p>  <p>Long shaft side Short shaft side</p> <p>Size 10, 15</p> <p>Long shaft side Short shaft side</p> <p>Size 20, 30, 40</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> <td>1 to 9</td> </tr> <tr> <td>15</td> <td>3 to 20</td> <td>1 to 10</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>4 to 32</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>4 to 36</td> <td>1 to 20</td> </tr> </tbody> </table> <p>(mm)</p>	Size	X	Y	10	3 to 18	1 to 9	15	3 to 20	1 to 10	20	3.5 to 30	1 to 15	30	4 to 32	1 to 18	40	4 to 36	1 to 20
Size	Y																																											
10	1 to 9																																											
15	1 to 10																																											
20	1 to 15																																											
30	1 to 18																																											
40	1 to 20																																											
Size	X	Y																																										
20	3.5 to 21	1 to 15																																										
30	4 to 24	1 to 18																																										
40	4 to 27	1 to 20																																										
Size	X	Y																																										
10	3 to 18	1 to 9																																										
15	3 to 20	1 to 10																																										
20	3.5 to 30	1 to 15																																										
30	4 to 32	1 to 18																																										
40	4 to 36	1 to 20																																										

Symbol


-XA58 to XA59

Shaft Pattern Sequencing II

Symbol: A58

The rotation axis is reversed, and then shorten the long and short shafts.

- Applicable shaft type: J, T




Size	X	Y
10	3 to 10	1 to 17
15	3 to 11	1 to 19
20	3.5 to 16.5	1 to 28.5
30	4 to 20	1 to 30
40	4 to 22	1 to 34

(mm)

Symbol: A59

The rotation axis is reversed, and then shorten the long shaft.

- Applicable shaft type: X



Size	Y
20	1 to 19.5
30	1 to 22
40	1 to 25


(mm)

CRQ2X Series Made to Order Specifications 1

Please contact SMC for detailed dimensions, specifications and lead times.



How to Order

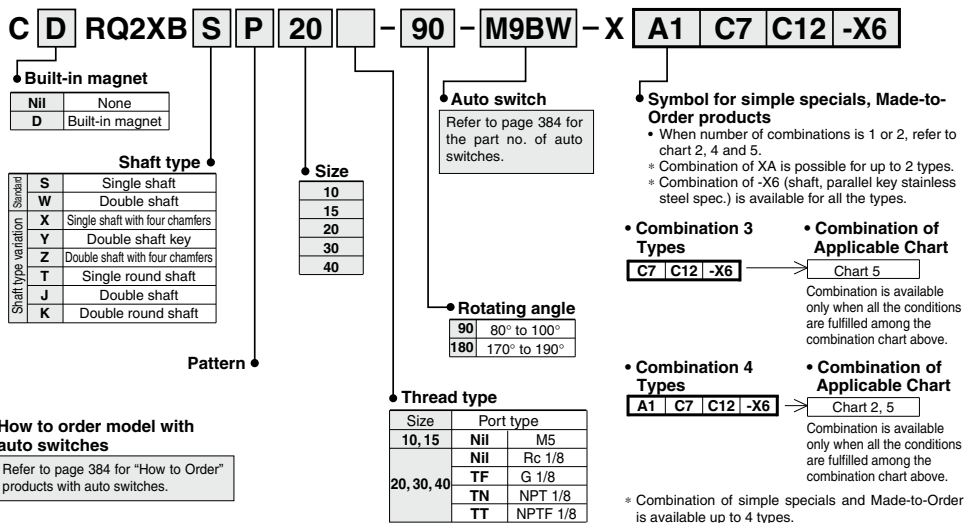

How to order model with auto switches

Refer to page 384 for "How to Order" products with auto switches.

Combination Chart of Made to Order

Chart 5. Combination between -XC□ and -XC□

Symbol	Description	Applicable size	Combination
XC7	Reversed shaft	10, 15, 20, 30, 40	XC 7
XC8 to XC11	Change of rotating range		●
XC12 to XC15	Change in angle adjustable range 0° to 100°		●
XC16 to XC17	Change in angle adjustable range 90° to 190°		●
XC18 to XC19	Change of rotating range	20, 30, 40	●
XC20 to XC21	Change in angle adjustable range 90° to 190°		●

1 Reversed Shaft


Symbol
-XC7

CRQ2XB
CDRQ2XB Refer to "How to Order" on page 384. — XC7


Reversed shaft ●

Specifications

Applicable size	10, 15, 20, 30, 40
Applicable shaft type	S, W, X, T, J shaft

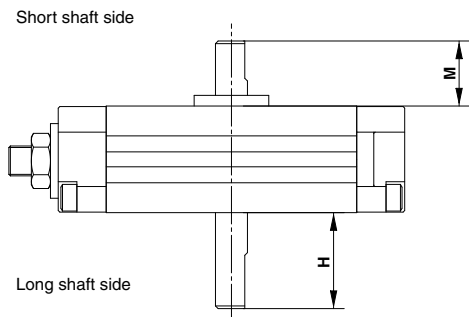

Size 10, 15

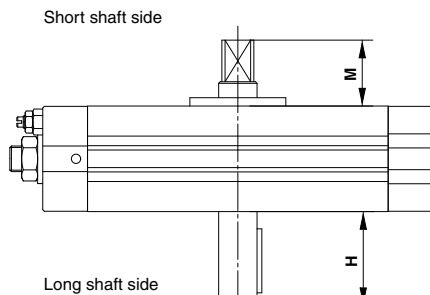

Size 20, 30, 40

(mm)

Size	M	H
10	10	17 (—)*
15	11	19 (—)*
20	16.5	28.5 (19.5)*
30	20	30 (22)*
40	22	34 (25)*

* For X shaft

CRQ2X Series

Made to Order Specifications 2

Please contact SMC for detailed dimensions, specifications and lead times.



2 Change of Rotating Range

Symbol
-XC8 to XC11, XC18/XC19

CRQ2XB
CDRQ2XB Refer to "How to Order" on page 384. —X C8

Specifications

Applicable shaft type S, W, Y

Symbol
-XC8 to XC11, XC18/XC19

Additional Reminders

The rotation starting point shows the positions of one flat chamfering and the key groove when pressurized to the connecting port (B).

<p>Symbol: C8</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (down).</p> <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C9</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the horizontal line (left).</p> <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C10</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (up).</p> <p>The figure shows the view from the long shaft end.</p>												
<p>Symbol: C11</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the horizontal line (left).</p> <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C18</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (down).</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Operating size</th> </tr> </thead> <tbody> <tr><td>20</td></tr> <tr><td>30</td></tr> <tr><td>40</td></tr> </tbody> </table>	Operating size	20	30	40	<p>Symbol: C19</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (up).</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Operating size</th> <th>End of rotation</th> </tr> </thead> <tbody> <tr><td>20</td><td></td></tr> <tr><td>30</td><td></td></tr> <tr><td>40</td><td></td></tr> </tbody> </table>	Operating size	End of rotation	20		30		40	
Operating size														
20														
30														
40														
Operating size	End of rotation													
20														
30														
40														

3 Change of Angle Adjustable Range (0° to 100°, 90° to 190°) -XC12 to XC17, XC20/XC21

CRQ2XB
CDRQ2XB Refer to "How to Order" on page 384. —X C12

Symbol
-XC12 to XC17, XC20/XC21

Specifications

Applicable shaft type S, W, Y, X*, Z*, T*, J*, K*

Additional Reminders

The rotation starting point is the position of the flat and the key groove when the actuator is pressurized through connection port B.
* Only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Symbol: C12

The rotation angle can be adjusted between 0° and 100°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C13

The rotation angle can be adjusted between 0° and 100°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C14

The rotation angle can be adjusted between 0° and 100°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C15

The rotation angle can be adjusted between 0° and 100°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C16

The rotation angle can be adjusted between 90° and 190°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C17

The rotation angle can be adjusted between 90° and 190°.

Size	Lmax
10	15
15	18
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C20

The rotation angle can be adjusted between 90° and 190°.

Operating size
20
30
40

Size	Lmax
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

Symbol: C21

The rotation angle can be adjusted between 90° and 190°.

Operating size
20
30
40

Size	Lmax
20	24
30	27
40	31.5

The figure shows the view from the long shaft end.

CRQ2X Series


Made to Order Specifications 3

Please contact SMC for detailed dimensions, specifications and lead times.



4 Shaft, Parallel Key Made of Stainless Steel Spec.

Symbol
-X6

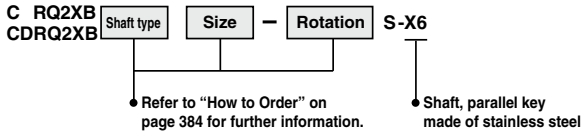

Stainless steel is used as a substitute material for standard parts when used under conditions with a possibility of oxidation or decay.

Fluid	Air (Non-lube)
Applicable shaft type	S, W, X, Y, Z, T, J, K
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached
Rotation range	80° to 100°, 170° to 190°
Stainless steel part	Shaft, Parallel key
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable