



規格：

| 型號 | MVVA-10 | MVVA-15 | MVVA-20 |
|-------------------|--|-----------|-----------|
| 噴嘴直徑 | 1.0 mm | 1.5 mm | 2.0 mm |
| 配管口徑尺寸 | G1/8 | G1/4 | G3/8 |
| 使用流體 | 空氣 | | |
| 使用壓力範圍 | 0.1~0.6 MPa (1~6 kgf/cm ²) | | |
| 周圍溫度 | 0~+60°C (不凍結) | | |
| 到達真空度 | -91.8 kPa (-690mmHg) | | |
| 吸入流量 | 32 ℓ/min | 63 ℓ/min | 130 ℓ/min |
| 空氣消耗量 | 76 ℓ/min | 100 ℓ/min | 185 ℓ/min |
| 供給空氣壓 | 0.5 MPa (5 kgf/cm ²) | | |
| 信號確認設定範圍 SJ 型式 | -20.0 ~ -90 kPa (-150 ~ -680 mm Hg) | | |
| 給油 | 不需給油 | | |
| 重量 (g) | 標準型 | 84g | 126 g |
| | SJ 型式 | 110g | 158 g |

符號：

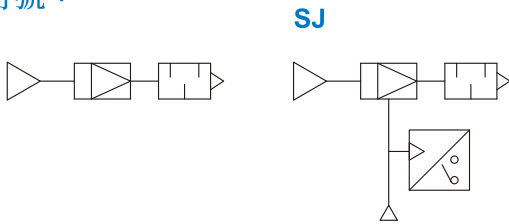


訂購代號：

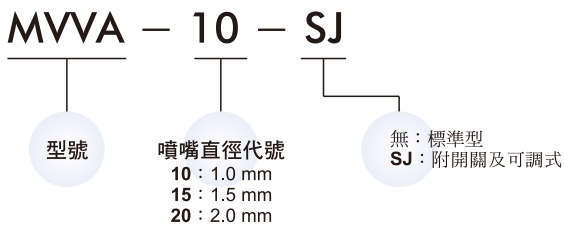


真空特性表：


MVVA-10

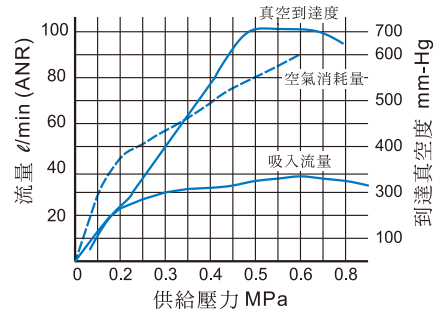

MVVA-15

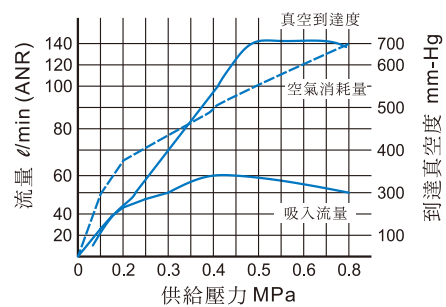

MVVA-20

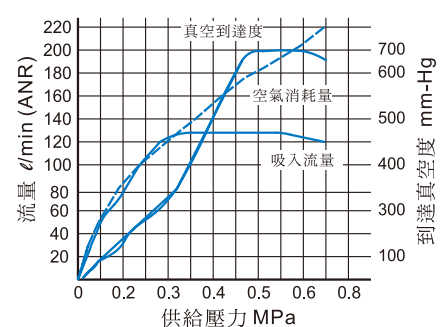

MVVA 外觀尺寸


真空產生器



mindman


MVVA-**-SJ

MVVA-**-S

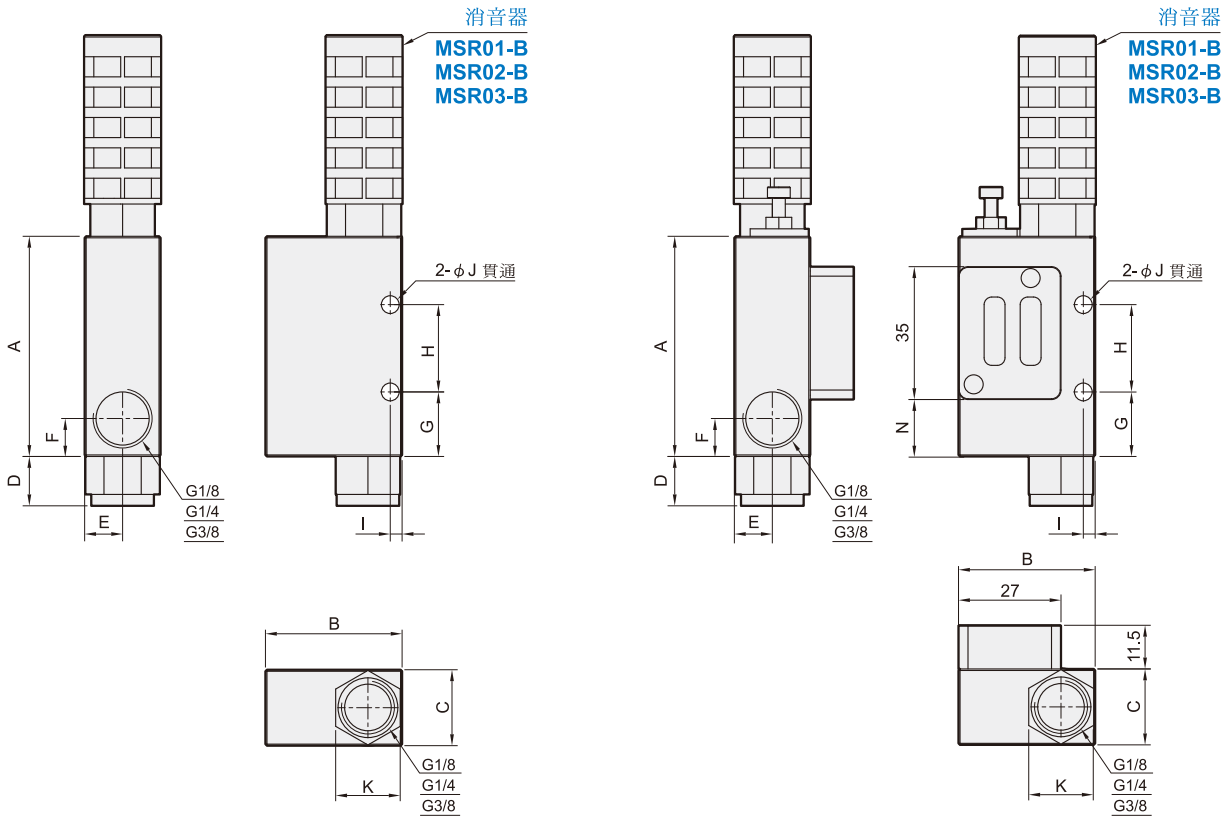

| 代號 型號 | A | B | C | D | E | F | G | H | I | J | K | N |
|------------|----|----|------|----|------|----|----|----|---|-----|----|------|
| MVVA-10 | 55 | 34 | 15.5 | 10 | 7.75 | 10 | 13 | 18 | 3 | 4.5 | 14 | — |
| MVVA-10-SJ | 55 | 34 | 15.5 | 10 | 7.75 | 10 | 13 | 18 | 3 | 4.5 | 14 | 9 |
| MVVA-15 | 58 | 36 | 20 | 13 | 10 | 10 | 17 | 23 | 3 | 4.5 | 17 | — |
| MVVA-15-SJ | 58 | 36 | 20 | 13 | 10 | 10 | 17 | 23 | 3 | 4.5 | 17 | 15 |
| MVVA-20 | 75 | 43 | 30 | 18 | 15 | 14 | 23 | 32 | 5 | 5.5 | 22 | — |
| MVVA-20-SJ | 75 | 43 | 30 | 18 | 15 | 14 | 23 | 32 | 5 | 5.5 | 22 | 30.5 |

MSR*-B

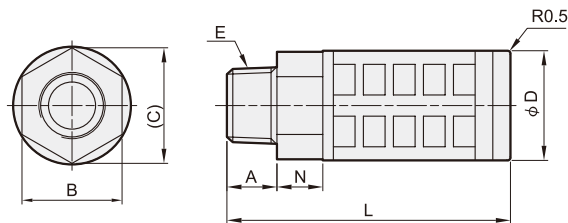

| 型號 | A | B | C | D | E | L | N |
|---------|----|----|------|------|-------|------|-----|
| MSR01-B | 7 | 14 | 16.2 | 16 | Rc1/8 | 33 | 7 |
| MSR02-B | 10 | 17 | 19.6 | 20.3 | Rc1/4 | 63 | 8.5 |
| MSR03-B | 12 | 24 | 26.2 | 26.3 | Rc3/8 | 67.5 | 11 |



mindman